
# **CEYLON ELECTRICITY BOARD**

DISTRIBUTION DIVISION 02 LICENCE NO: EL/D/09-004

# Supply Services Code



March 2014

# **Table of Contents**

Tabl	le of Contents	2
Defi	nitions and abbreviations	2
Prea	amble	6
1.	The organization of your service provider	7
2.	How to contact your service provider	8
3.	New Connections, Disconnections and Re-connections	9
4.	Security deposits in respect of supply	17
5.	Electricity Bill	18
6.	Payment of Electricity Bills	20
7.	Consumers in default	22
8. Page	Provision of services for Customers who are disabled, chronically ill or of pensionable e23	<u>)</u>
9.	Consumer complaint handling procedure	24
10.	Procedure with respect to entering in to Customer's premises	25
11.	Efficient use of electricity	26
12.	Planned & Unplanned Interruptions to the supply of electricity	27
13.	Meters	28
14.	Information about theft, damage and meter interference	30
15.	Securing the Grant of Wayleave	31
16.	Felling or lopping trees, or cutting back roots in close proximity to electric lines or stric plants	21
	·	
17.	Public safety	
18	Annexes	22

# **Definitions and abbreviations**

TERM	DEFINITION			
Accredited	A person qualified and experienced in design,			
Electrician	installation and testing the electricity distribution system			
	of Retail Customers, accredited by a due process			
	established by the Distribution Licensee. A list of			
	Accredited Electricians shall be available for the			
	information of Customers, upon request and would be			
	published in the Licensee's website.			
Accredited	A person qualified and experienced in design,			
Chartered	installation and testing the electricity distribution			
Electrical	systems of Retail and Bulk Customers, accredited by a			
Engineer	due process established by the Distribution Licensee. A			
	list of Accredited Chartered Electrical Engineer shall be			
	available for the information of Customers, upon request			
	and would be published in the Licensee's website.			
AEE	Area Electrical Engineer			
AGM	Additional General Manager			
Charges	Approved charges, Licensee is permitted to levy from			
	Customers, prospective Customers and the general			
	public for carrying out work requested by them.			
Apparatus	All equipment in which electrical conductors are used,			
	supported or of which they may form part.			
Breakdown	An occurrence relating to equipment of the supp			
D 11 C	system which prevents its normal functioning			
Bulk Customer	A Consumer who under a standard tariff agreement has			
	agreed a contract demand of more than 42kVA. These			
CED	Consumers may be connected at LV or MV			
CEB	Ceylon Electricity Board, established by the Ceylon Electricity Board Act, No. 17 of 1969			
CEB Id	Ceylon Electricity Board Identity Card			
CEE	Chief Electrical Engineer			
Consumer	A Consumer of electricity in Sri Lanka and includes a			
Consumer	prospective Consumer.			
Contract Demand	Maximum real (kW) or apparent (kVA) power demand			
	agreed to be supplied by the Licensee/Supplier as stated			
	in the declaration made by the Customer.			
CT	Current Transformer			
Customer	Means a Tariff Customer			
Demand	The requirement for active power and reactive power			
	unless otherwise stated			
DGM	Deputy General Manager			
Disconnect The act of physically separating User's (or Cus				
	equipment from the Distribution Licensee's system.			
Disconnection	A demand in writing for the payment of the charges due			
Notice	or a notice by the distribution licensee requiring the			
	tariff customer to cease to use the appliances which			

TERM	TERM DEFINITION		
I DICIVI	interfere with electricity supplied to another customer		
Distribution Area	An operating unit within a Distribution Province, which		
	is headed by an Area Electrical Engineer		
Distribution	A person who has been granted a Distribution Licence		
Licensee	by the Public Utilities Commission of Sri Lanka, unde		
	Sri Lanka Electricity Act, No. 20 of 2009		
Distribution	An operating unit within a Distribution Region, which i		
Province	demarcated geographically (as a province) and headed		
	by Deputy General Manager		
Distribution	The geographical area of operation of a Distribution		
Region	Licensee of CEB and is headed by Additional General		
	Manager		
Distribution	The system consisting of lines owned and/or operated by		
System	a Distribution Licensee for the purposes of distribution		
	of electricity from a grid substation to another		
	substation, or to or from any External Interconnection,		
	or to deliver to Customers, including any plant and		
	Apparatus and meters owned or used by the Distribution Licensee in connection with the distribution of		
	electricity.		
ECSC	Electricity Consumer Services Centre		
EE	Electrical Engineer		
Electric Line	Electrical Engineer		
	Any line whether underground or over ground which is used for carrying electricity for any purpose and includes, unless the context otherwise requires- a) any support for any such line, including but not limited to, any structure, pole or other thing in, on, by or from which any such line is or may be supported, carried or suspended; b) any apparatus connected to any such line for the purpose of carrying electricity; and c) any wire, cable, tube, pipe or other similar thing (including its casing, insulator or coating) which surrounds or supports or is surrounded or supported by or is installed in close proximity to or is supported, carried or suspended in association with, any such line		
Electric Plant	Any plant, equipment, apparatus or appliance used for or for the purposes connected with, the generation, transmission, distribution or supply of electricity, other than an Electric Line or an electrical appliance under the control of the Consumer		
Energy	Quantity of electrical energy measured in units equal to one Kilowatt hour (kWh) or multiples thereof such as:  1000 Wh = 1 kWh  1000 kWh = 1 MWh  1000 MWh = 1 GWh		

TERM	DEFINITION		
ES	Electrical Superintendent		
GM	General Manager of Ceylon Electricity Board		
High Voltage or			
HV	Voltage above (and excluding) 33,000 Volt		
External	A connection to a network outside the network of a		
Interconnection	Licensee		
kV	kilovolt or 1000 volt		
kVA	kilovolt ampere		
kWh	Kilowatt hour		
Licensee	Licensee or License Holder is a person or business entity		
	to whom a License or Authorization is issued by		
	PUCSL, under the Public Utilities Commission of Sri		
	Lanka Act No 35 of 2002 and Sri Lanka Electricity Act		
	No 20 of 2009, for carrying out Generation,		
	Transmission, Distribution and Supply of electrical		
	energy.		
Load	The Active and Reactive Power, as the context requires,		
	generated, transmitted or distributed, and all similar		
	terms shall be construed accordingly.		
Low Voltage or	Nominal voltage exceeding 50 Volt and not exceeding		
LV	1000 Volt		
	1000 ¥011		
NIC	National Identity Card		
MCCB	Moulded Case Circuit Breaker		
MCB	Miniature Circuit Breaker		
Medium Voltage	Nominal voltage exceeding 1000 Volt and not		
or MV	exceeding(and including) 33,000 Volt		
Meter	An electricity meter or energy meter is a device that		
	measures the amount of electric energy consumed by a		
	residence, business, or an electrically powered device		
Metering	Tariff Metering and Operational Metering		
MVA	Mega Volt Ampere = 1000 kVA		
POS	Point of Sale		
PPM	Programmable Polyphase Meter		
Power Factor	Ratio of active power (kW) to apparent power (kVA)		
PSD	President's Security Division		
PUCSL	Public Utilities Commission of Sri Lanka incorporated		
	under PUCSL Act No 35 of 2002.		
R & D	Research and Development		
Reactive Power or	$\mathcal{E}$		
MVAr	phase angle between them measured in units of volt		
	amperes reactive (Var) and standard multiples thereof		
	i.e.		
	1000  VAr = 1 kVAr		
	1000  kVAr = 1 MVAr		
Retail Customer	A Consumer who has under a standard tariff agreement,		

TERM	DEFINITION		
	agreed to use not more than 42kVA at LV		
SIM -	Subscriber Identification Module		
SLEA	Sri Lanka Electricity Act, no 20 of 2009 as amended		
SEA	Sri Lanka Sustainable Energy Authority.		
Electricity Bill	A monthly bill issued by the CEB for the consumption of electricity of the Customer, which includes the statement of accounts and several other relevant information		
Substation	An assembly of equipment including any necessary housing for the conversion, transformation, switching or control of electrical power.		
Tariff Customer	A person/Consumer who requires a supply of electricity from the CEB in terms of the Sri Lanka Electricity Act		
TDT	No. 20 of 2009 and is supplied by the CEB.		
VAr	Time of the Day Tariff A single unit of Reactive Power (Volt-Ampere reactive)		
Wayleave	Such interest in the land as consists of a right of a Licensee, to install and keep installed, an electric line on, under or over that land and to have access to that land for the purpose of inspecting, maintaining, adjusting, repairing, altering, removing or replacing such electric line.		

#### **Preamble**

This is the Supply Services Code (SSC) provided by Distribution Division 02 of Ceylon Electricity Board in accordance with Section 18 (b) of the Sri Lanka Electricity Act, No. 20 of 2009 and Condition 33 of the Electricity Distribution and Supply Licence No. EL/D/09-004. It represents the code of practice that governs the services provided by us, and is a guide to our processes and procedures. In supplying or offering terms for supply, we will not show undue preference, discrimination and the terms will not be unduly onerous.

This code does not replace the laws and regulations applicable to us, which govern our work. In the event of any inconsistency between the laws or regulations and this code, the former will prevail.

This code is based on the provisions of the Sri Lanka Electricity Act, No 20 of 2009, as amended, and the prevailing regulations, rules, methodologies, guidelines and other codes made under same and would need to be revised over time to reflect the changes to same. We will keep you informed of any such changes, as and when they are introduced.

### 1. The organization of your service provider

The Distribution System of the Ceylon Electricity Board (CEB) is divided in to four distribution divisions. Each Distribution Division is managed by an Additional General Manager. A Distribution Division comprises of several Distribution Provinces and Distribution Areas, but the boundaries of these Distribution Provinces may not necessarily coincide with the boundaries of administrative provinces of Sri Lanka. A Distribution Province is managed by a Deputy General Manager while an Area is managed by either a Chief Electrical Engineer or an Electrical Engineer, generally referred to as the Area Electrical Engineer.

Customer and Consumer matters are generally attended that the Area Electrical Engineer's Office. However, certain Consumer matters such as requests for bulk supply of electricity, construction of rural electrification schemes etc. are attended to at the Distribution Provincial office, while matters such as new electricity Customer connection enquiries and Consumer Breakdown complaints are attended to at Electricity Consumer Service Centers (ECSC), which are headed by an Electrical superintendent. These services are attended to in a different manner in the Colombo City, whereas Control Centre attends to all Breakdown complaints and High Tension operations.

Distribution Provinces coming under Distribution Division 02 of the CEB are identified below.

#### Distribution Division [02]

- 1 Western North Province
  - Western North Province covers the Gampaha District.
- 2 Central Province
  - Central Province covers the Kandy, Matale, Nuwara Eliya and Kegalle Districts.
- 3 Eastern Province
  - Eastern Province covers the Ampara, Batticaloa and Trincomalee Districts

# 2. How to contact your service provider

A detailed list of all the Area Offices and ECSCs along with their addresses and telephone numbers in respect of each distribution province is provided in **Annex 1.** These contact details are also available on the CEB website <a href="www.ceb.lk">www.ceb.lk</a>, and can be provided on request.

#### **Contact details for Enquiries and Complaints (including breakdowns)**

Enquiries and complaints, including break down are attended to by the respective ECSC, Area office or provincial call centres.

The telephone number to be used in case of a complaint including Breakdown is printed on the front lower portion of the monthly Electricity Bill.

The Breakdown services as well as the enquiry services are operated free-of-charge. Any change to the address and telephone numbers of the above enquiry service will be displayed in the monthly Electricity Bill.

#### **Call Centre at CEB Head Office**

A CEB call centre has been established at the CEB Head Office for the benefit of Consumers of all Distribution Provinces. Consumers can lodge any complaint about the services of CEB at this call centre. The telephone numbers of the call centre are:

Hot Line1987

011-248 1 230

011-248 1 231

#### **Provincial CEB Control Centres**

Call received at the CEB head office call centre will be directed to call control centres at provinces to execute the work.

Distribution Division 2 has following Call Control Centres mainly for processing complaints with respect to breakdowns.

#### Western North Province Call Centre

Address: DGM (WPN) Control Centre, Kandy Road, Kiribathgoda

Telephone Nos. 011 5988988

#### Central Province Control Centre

Address: DGM (CP) Control Centre, Quarry Rd, Eriyagama, Peradeniya

There isn't call centre in operation for Eastern Province. Establishment of control centre is in process. All breakdowns and complaints in Eastern Province have to be referred to the nearest ECSC, Area Office or Head office call center (1987).

#### 3. New Connections, Disconnections and Re-connections

#### 3.1 Supply of electricity

Subject to certain exemption from our duty to connect and supply electricity stipulated in the SLEA, upon any request by the owner or occupier of any premises within our Distribution Division, we shall connect, supply and maintain the supply of electricity to those premises on the basis of a standard tariff agreement. We will inform all Consumers, of the requirements which have to be satisfied in order to obtain a supply of electricity. We shall avoid any undue preference or undue discrimination in the connection of any premises. The owner or occupier of any premises, which is situated within fifty meter from any distribution line or which could be connected to a distribution line by an electric line supplied and lay by the owner or occupier of the premises, may request for a supply of electricity, and shall inform us of:

- (a) the premises at which the supply is required;
- (b) the purpose for which electricity is to be used in those premises;
- (c) the day (not being earlier than a reasonable time after the distribution licensee is informed of a person's requirement) on which the supply is required to commence;
- (d) the maximum power which may be required at any time and
- (e) The minimum period for which the supply is required to be given.

After receiving a request, if a supply of electricity has not been provided to such premises or the giving of the supply requires the provision of electric lines or electric plant or both or, we shall give a notice stating the extent to which the request is acceptable and specify any counter proposals, tariff payable, any payment required to defray the cost of providing any electric line or electric plant and a supply of electricity, if doing so would result in the Distribution Division 02 being in breach of the provisions of the Sri Lanka Electricity Act, No. 20 of 2009.

We provide new connections to prospective Tariff Customers at standardized contractual Demands as per the Charges. Details of the standardized contractual Demands are given in **Annex 2**.

#### 3.1.1 Request for supply of electricity (Retail Customers & Bulk Customers)

a. In the case of a retail supply of electricity, the owner or occupier of any premises within our Authorized Area, may make a request at the nearest ECSC by submitting a duly filled standard application form, which is issued free of charge. The prospective Retail Customer may be required to provide documents to establish the ownership or occupancy of the premises, where the connection is required. Please contact your Area Electrical Engineer for more details. The document titled "Instructions to New Connection Applicants" and

- a sample of the standard application form is given in **Annex3.** However if the Customer is liable for the payment of any overdue Charges with respect to a connection of electricity supply to the same premises or any other premises, his new connection maybe refused.
- b. In the case of a bulk supply of electricity, the owner or the occupier of the premises within our Authorized Area may apply for a supply of electricity from the nearby Area Electrical Engineer or he/she can directly address to DGM of the province for bulk supplies up to 1000 kVA and to DGM (Commercial & Corporate) of the relevant Division for bulk supplies above 01MVA. The cost estimate for <1MV customers will be informed to the customer within 30 working days and >1MVA customers will be informed within 60 working days. Security deposit and all other proceedings to be followed will be informed to customer with the forwarded estimate.
- c. An application for a bulk supply of electricity at 132kV or above is provided by the transmission Licensee of the CEB and is not covered under this code. If the applicant requires a bulk supply of electricity at 132kV or above, the application should be referred to the General Manager of the CEB.
- d. The applicant will be provided the option to sell or lop any tree(s) or cut back roots of any trees (on the applicant's land) that may obstruct or interfere with the installation, maintenance or working of any electric line or plant to be installed for the purpose of connecting and supplying electricity to his or her premises. If not, with the agreement of the applicant, we will undertake to carry out same and recover relevant charges from the applicant.
- e. We will obtain the Way leave, if it is necessary to install and keep installed an electric line on, under or over any land (other than the premises for which the supply is required). However, the cost of obtaining the Way leave will be recovered from the applicant (for details on obtaining Way leave, please refer Section 15).
- f. Our authorized officers will visit the premises to take measurements and assess the potential electricity usage in order to prepare the cost estimate. For any additional visit(s) required for the same due to non-fulfillment of the requirements specified in the standard application form on the part of the applicant, an additional charge for testing and inspection according to the Charges approved by the Commission will need to be paid by the Customer.
- g. We will give the cost estimate within a period of ten (10) working days from the date of the application for retail supplies. The cost estimate will indicate the cost of providing the supply of electricity and the security deposit if required as well as any further requirements to be fulfilled by the applicant before providing the supply of electricity. A standard tariff agreement for the supply of electricity also needs to be signed by the prospective Customer. A sample format of the said agreement is given in **Annex 4.**
- h. The cost estimate will be prepared on the basis of the Charges approved by the Commission and would be valid till the 31<sup>st</sup> December of that particular year, unless the Commission revises the Charges within the course of the year or until the Commission approves the Charges for the following year. In order to obtain the supply of electricity, the applicant is required to pay the estimated costs and if requested the security deposit. If the applicant does not have a

- sufficient means to defray the expenses incurred by the distribution licensee, he can request us to recover the cost in reasonable monthly instalments along with the tariff and other charges.
- i. If a cost estimate cannot be given within ten (10) working days from the date of the application due to non-availability of a Distribution System, applicant's inability to provide the requisite information specified under Section 25 (5) of the Sri Lanka Electricity Act, No. 20 of 2009, as amended or any other reason, the applicant will be informed of such reason within such period.
- j. However, before making the payment, the applicant is required to complete the internal wiring to the satisfaction of Distribution Region 02 i.e. the internal wiring must comply with the Institution of Electrical Engineers Wiring Regulations (IEE Wiring Regulations) or such other requirement relating to safety as prescribed under the provisions of the Sri Lanka Electricity Act, No.20 of 2009 as well as fulfill all the other requirements indicated in the cost estimate, such as the erection of the service bracket, provision of space for installation of the service cut-out/MCB/MCCB/Bus Bars or any other switchgear and Meter(s) etc.
- k. For a retail supply of electricity, the applicant is required to provide an Installation Test Report on the internal wiring, certified by an Accredited Electrician, registered with the CEB. Whereas, for a bulk supply of electricity, the applicant is required to provide an Installation Test Report on the internal wiring, certified by an Accredited Chartered Electrical Engineer.
- 1. We will endeavour to provide the supply of electricity within fifteen (15) days for retail customers and within 70 working days for bulk customers with line length <5km and within 100 working days for bulk customers with line length >5 km from the date of payment.
- m. During the process of providing the supply of electricity, if the applicant is unable to fulfill any of the requirements in the cost estimate, can request for a withdrawal or cancelation of the application, we will refund the payment made by the applicant within 5 days, after deducting the costs incurred up to that point. In the case of an underground supply of electricity in areas like the Colombo City, the applicant may also be required to ensure that the requirements of the Municipal authorities, Police and other relevant authorities are also fulfilled before the cost estimate for the supply of electricity is paid.
- n. If the supply of electricity cannot be provided due to any circumstances outside the control of the Distribution Division 02, the payment made by the applicant will be refunded after deducting the costs incurred up to that point. If the Licensee is unable to provide the connection by the stipulated period due to an inability of the licensee and any time thereafter if the applicant withdraws the application and requests for a refund, we will refund the payment made by the applicant after deducting the costs incurred up to that point If the period between the date of payment and such date of refund is more than 90 days, the Customer will be paid interest on the amount of refund for the period starting from date of payment. The rate of interest will be equal to the applicable interest rate of the most recently issued 364 day Treasury bill at the date of refund.

o. If a supply of electricity cannot be provided for any of the above reasons, outside the control of the Distribution Division 02, the Distribution Division 02 shall not be held responsible in any manner for any consequences arising from such a situation.

#### 3.1.2 Temporary Supply of Electricity

The owner or occupier of any premises may request for a temporary supply of electricity for a short or long duration depending on the need. Such a temporary supply of electricity is not usually extended beyond the period for which it was initially provided.

#### 3.1.2.1 Temporary Supply of Electricity for a Short Duration

A temporary supply of electricity may be requested by the owner or occupier of any premises for domestic functions such as weddings, funerals, religious ceremonies etc., for duration of up to two weeks. The application for a temporary supply of electricity for a domestic function and short duration may be submitted to the respective Area Electrical Engineer (AEE), and the supply of electricity will be provided after paying the estimated cost of providing the temporary supply of electricity. Alternatively, an extension from an existing connection to any premises nearby may be provided with the consent of the owner or occupier (Customer), of the premises from which the extension is sought. However, prior to the provision of such an extension any outstanding payments in the respective Electricity Bill should be settled. Once all the requirements are fulfilled, the Area Electrical Engineer will approve the temporary connection to the proposed premises by extension.

A temporary supply of electricity may be requested by the owner or occupier of any premises for public functions such as musical shows, exhibitions, political rallies etc., for duration of up to one month. The application for a temporary supply of electricity for a public function and short duration may be submitted to the Area Electrical Engineer, and the supply of electricity will be provided after paying the estimated cost of providing the temporary supply of electricity. In such cases, a safe place for our metering and terminal equipment should be provided.

- a. Payment of a security deposit and the execution of an agreement may be required for temporary supply of electricity. Statement showing unit consumed and billed amount with the amount of deposit and balance amount to be refunded / recovered will be issued to customers. The estimated costs of providing the supply of electricity will not exceed the Charges approved by the Commission.
- b. The owner or the occupier requesting the supply of electricity should ensure that the electrical installation is safe for use and does not cause any danger to the public as per relevant regulations, and the temporary wiring installation is certified by an Accredited Chartered Electrical Engineer or an Accredited Electrician registered with the CEB as the case may be.

#### 3.1.2.2 Temporary Supply of electricity for a Long Duration

At temporary supply of electricity may be requested by the owner or occupier of any premises for a construction of a house or any other building for a period of up to two years, which may be converted to a permanent supply of electricity, after

the construction work is finished. The application for a temporary supply of electricity for construction purposes for a long duration may be submitted to Area Electrical Engineer and the supply of electricity will be provided after paying the estimated cost of providing the temporary supply of electricity. Although categorized as a temporary supply of electricity, the Customer account will be administered similar to a permanent supply of electricity i.e. an electricity account will be opened and monthly Electricity Bill will be issued on the basis of 'General Purpose Tariff'. The temporary supply of electricity will be converted in to a permanent supply of electricity under the applicable tariff at the end of the period of construction, once all the requirements applicable to a new supply of electricity described earlier in 3.1.1 are fulfilled.

- a. Temporary supply of electricity may also be requested by the owner or occupier of any premises for a construction of a dam, tunnel or bridge etc. for a period of up to five years, which may not be converted to a permanent supply of electricity, after the construction work is finished. Application for a temporary supply of electricity for a construction purposes for a long duration may be submitted to the Area Electrical Engineer and the supply of electricity will be provided after paying the estimated cost of providing the temporary supply of electricity. Although categorized as a temporary supply of electricity, the Customer account will be administered similar to a permanent supply of electricity i.e. an electricity account will be opened and monthly Statements of Account will be issued on the basis of the 'General Purpose Tariff'. The temporary supply of electricity will be terminated at the end of the period of construction.
- b. The owner or occupier, requesting the supply of electricity should ensure that the electrical installation is safe for use and does not cause any danger to the public, as per relevant regulations and the temporary wiring installation is certified by an Accredited Chartered Electrical Engineer registered with CEB or an Accredited Electrician registered with the CEB.
- c. The charges applicable for providing a temporary supply of electricity for a Long Duration will be the same as that for a permanent supply of electricity.

#### 3.1.3 Street Lamps

You may contact the respective Local Authority or the Area Electrical Engineer for advice regarding the supply of electricity for street lamps. The Local Authority is required to facilitate the supply of electricity for street lamps in accordance with applicable procedures stipulated by the relevant authority.

3.1.4 Changes to the Customer's data, transfer of account or change of tariff category.

Changes to data pertaining to the Customer, in the Electricity Bill, such as the name (not transfer of account), residential address or mailing address etc., may be requested by the Customer in writing from the Area Electrical Engineer.

Changes to the standard tariff agreement, such as the transfer of the account or change of tariff category etc. need to be requested from the Area Electrical

Engineer by the Tariff Customer by submitting an application in a prescribed form along with the payment of the Charges approved by the Commission.

#### 3.2 <u>Disconnection of the supply of electricity</u>

- 3.2.2 The supply of electricity is liable to be disconnected, discontinued or cut-off, as the case may be, upon occurrence of one or more of the following:
  - a. On a request made by the Customer(as provided in the standard tariff agreement), where such Customer has settled all dues and provided at least two working days prior notice given to the Area Engineer. When all charges are settled, the account will be closed and the deposit will be refunded.
  - b. Non-payment of the deposit within seven days of the notice informing the Customer of any revision of the security deposit by the Area Engineer.
  - c. Has not within the requisite period, paid all charges due to us in respect of the supply of electricity to any premises, or the provision of any electricity meter, electric line or electric plant for the purpose of that supply or paid the monthly instalments due for the requisite period according to the agreement between the licensee and the customer. However the supply will not be cutoff on holidays, weekends, or after working hours.
  - d. Failure to comply with a notice issued by us, requiring the Customer to cease using any appliance, which unduly or improperly interferes with the supply of electricity by the Distribution Division 02 to any other Consumer. A period of not less than 10 days will be provided to rectify the matter before cutting off the supply of electricity.
  - e. Use of electricity in a dangerous and unsafe manner which can cause injury to the Customer or the public in general as provided in regulations prescribed under the provisions of the Sri Lanka Electricity Act, No. 20 of 2009;
  - f. Intentionally or negligently damages or causes to be damaged any Electric Line or Electric Plant or domestic electricity supply equipment belonging to or operated by the Distribution Division 02 which according to the provisions of the Sri Lanka electricity Act, No. 20 of 2009, is recognized as an offence punishable after a summary trial before a Magistrate Court.
  - g. Upon conviction in courts for intentionally or negligently preventing the meter from duly registering the quantity of electricity supplied through that meter. According to the provisions of the Sri Lanka Electricity Act No.20 of 2009,this is recognized as an offence and is punishable after a summary trial before a Magistrate Court
- 3.2.3 The supply of electricity will be disconnected under the circumstances mentioned above. However, the Customer or in his or her absent, any other person at the premises will be served a notice containing the reasons for the disconnection and the requirements to be fulfilled for reconnection of supply of electricity, before the supply is disconnected

#### 3.3 Re-Connection of the supply of electricity

The supply of electricity, which has been disconnected, will be resumed, upon the occurrence of the following:

- a. Where the discontinuation was due to non-payment of the security deposit, the supply of electricity will be restored within two working days after the payment of the security deposit.
- b. Where the cut-off was due to non-payment of the charges due to us, supply of electricity will be resumed within 02 working days after the payment of the charges payable including the reconnection fee approved by the Commission.
- c. Where the cut-off was due to failure of a Customer to comply with a notice from the licensee requiring him or her to cease using any appliance which interferes with the supply of electricity to any other consumer, the supply of electricity will be restored within 02 working days after the Customer ceased using such appliance.
- d. Where the disconnection was due to the use of electricity in a dangerous and unsafe manner, as provided in regulations prescribed under the provisions of the Sri Lanka Electricity Act, No. 20 of 2009, the supply will be restored as soon as practicable once we are satisfied that no such danger exists.

# 4. Security deposits in respect of supply

#### 3.1 <u>Security Deposit</u>

We may request, by notice in writing a Security Deposit from Customers, equal to an amount of 02 months assessed average consumption, prior to giving the supply or later depending on your payment pattern or change in the standard tariff agreement related to Customer category, Contract Demand etc. Similarly, we may revise the amount of the deposit from time to time to keep in line with your electricity consumption/payment pattern.

# 3.2 <u>Interest on the security deposit</u>

Customers will be paid interest on the security deposit obtained, if any. The rate of interest will be equal to the applicable interest rate of the most recently issued 20 year treasury bonds at the date of calculation of interest.

#### 3.3 Refund of the deposit

Customers will be refunded the deposit along with any applicable interest, when the standard tariff agreement is terminated after deducting amounts due. In case of transferring of Customer account, the deposit will be transferred to the new Customer's account on consent of the account holder. Please retain the original Paying In Voucher (PIV) with you as evidence to the Security Deposit you made.

# 5. Electricity Bill

- 5.1 The quantity of electricity supplied to a consumer is ascertained by an appropriate meter installed on the consumer's premises and the consumer is charged by reference to the quantity so ascertained. The register of electricity meter is ascertained and an electricity bill (containing the statement of account) is issued once in every thirty (30) days (a sample electricity bill is given in Annex 5). However, due to practical reasons, ascertaining the register of electricity meters may take place two (2) days prior to or after the 30th day (within a time period of 28 days to 32 days) from the last reading. In such situations, the Customer's monthly charge is adjusted, by prorating the tariff blocks (in the case of Domestic and Religious consumers) to coincide with the number of days in the billing period, so that the Customer is least affected by the period of ascertaining the registry of the meter. The computation of the charges for the period indicated in the electricity bill can be verified by using the tariff calculator available on our website (www.ceb.lk)
- 5.2 The electricity bill contains a statement of account' showing the billing period, brought forward balance from the previous period, payments made since the date of previous electricity bill, electricity consumption (units) during the period and corresponding charges, and any other charges due from the consumer, payment due date and a payment voucher for the payment.
- 5.3 The electricity bill also contain details of consumption containing the previous date of ascertaining the register of electricity meter and corresponding kWh reading on the electricity Meter, the current date of ascertaining the registry of electricity Meter and corresponding kWh reading on the electricity Meter and electricity (kWh) consumed during the current billing period. The current date of ascertaining the registry of electricity Meter and the corresponding kWh reading on the electricity Meter as well as the corresponding charges due (for the current billing period) from the Consumer are inserted by the meter reader when issuing the bill, while all the other information are printed on the bill. The information on prevailing electricity tariffs and the methodology of calculating the electricity bill can be obtained from any of our ECSC or our website (www.ceb.lk). Any revisions to the prevailing electricity tariffs will be published on mass media and consumers will be informed of any such revisions via a notice printed on the electricity bill.
- 5.4 In the normal course of business, we may estimate the amount of electricity consumed by a consumer and recover charges accordingly. Accordingly an electricity bill may be issued based on the estimated consumption for a particular billing period. This is due to the failure of meter reader gaining access to the electricity meter installed on a consumer's premises, unfavorable weather conditions or due to our inability to ascertain the register of electricity meter within the specified period (i.e. 28 to 32 days from the last date of reading). However, any such estimated consumption of electricity will be confirmed by a meter reading within a reasonable period of time.

We may also estimate consumption and recover charges, in the events of a meter being proved to register consumption incorrectly the malfunction of any meter or any person altering the register of any meter used for measuring the quantity of electricity supplied to any premises. In such events, the Consumers will have to pay for any electricity consumed in accordance with our estimate or as otherwise determined in accordance with the provisions relating dispute resolution (please refer the section on 'Consumer complaint handling procedure' for the procedure we adopt to attempt to resolve any dispute that may arise between us and a consumer or any other affected party).

- 5.5 The methodology that we adopt in estimating your consumption of electricity (in all the above instances) has been approved by the PUCSL and is presented as **Annex 6** to this Code. You may obtain any clarification on the said methodology from us.
- 5.6 In addition to the statement of account and details of electricity consumption, the following information, at minimum, will be provided in the electricity bill issued to Customers:
  - a. account number
  - b. respective Area office
  - c. tariff category
  - d. how to contact us in the case of a supply breakdown
  - e. how and whom to be contacted to obtain details/clarifications on the statement of account and details of consumption
  - f. means available for settling the charges due
  - g. contact details and opening hours of the relevant customer service center/Area Engineer's office
- 5.7 Also, from time to time, you will be provided information on electricity tariffs and upcoming revisions to same, guidance on efficient use of electricity etc. in the electricity bill.
- 5.8 It may take up to sixty (60) days to issue the initial electricity bill upon provision of a new supply connection. In case we fail to do so, the Consumer will be provided a facility to settle the charges due for the relevant periods (for which electricity bills were not issued) in monthly installments without any interest.

# 6. Payment of Electricity Bills

- 6.1 Retail Customers are provided a grace period of 30 days from the date of issuing of the monthly Electricity Bill to pay the charges for the period indicated therein in order to avoid charging of interest and disconnection of the supply of the electricity.
  - a. If the outstanding balance is not settled within thirty (30) days of issuing the electricity bill, interest will be charged on the outstanding amount at a rate approved by the Commission for the period starting from the date of issuing the bill until the early of the date of disconnection or the date of settlement.
  - b. Also, a Disconnection Notice will be issued if the outstanding amount is not settled within the thirty (30) days of the date of the Electricity Bill. The supply will be cut-off in case the charges are not settled within the requisite period of not less than ten (10) days indicated in the Disconnection Notice. (for details please refer Section 3.2)
  - c. If the supply has been cut-off, a reconnection processing charge will be imposed according to the approved Charges.
  - d. The supply of electricity will be resumed within two working days only upon the payment of the outstanding amount, the interest expenses of and reconnecting the supply and the security deposit, if requested (see Section 3.3).
- 6.2 Bulk Customers are provided a grace period of fifteen (15) days from date of issuing monthly the Electricity Bill to pay the charges for the period in order to avoid charging of interest and disconnection of supply of electricity.
  - a. If the outstanding balance is not settled within fifteen (15) days of issuing the electricity bill, interest will be charged on the outstanding amount at a rate approved by the Commission for the period starting from the sixteenth (16) day from date of issuing the bill until the early of the date of disconnection or the date of settlement.
  - b. Also, a Disconnection Notice will be issued if the charges are not settled within the thirty (30) days of the date of issuing the Electricity Bill. The supply of electricity will be cut-off in case the charges are not settled within the requisite period of not less than ten (10) days indicated in the Disconnection Notice. (for details please refer Section 3.2)
  - c. If the supply has been cut-off, a reconnection processing charge will be imposed according to the approved Charges.
  - d. The supply of electricity will be resumed within two working days, only upon payment of the outstanding amount, the interest, expenses of reconnecting the supply and the security deposit, if requested (see 3.3)
- 6.3 We recommend that Customers pay the charges due in their Electricity Bill at the Distribution Division 02's Point of Sale (POS) counters due to following advantages.
- 6.3.2 Payment details are available online in the CEB POS system
- 6.3.3 Payment is credited to the Customer's account at the end of the same day.

- 6.3.4 Customer will be issued an acknowledgement of the payment on the Electricity Bill with the following details.
  - a. Date
  - b. Account Number
  - c. Name of the Customer
  - d. Payment Mode (Cash/ Cheque / Draft/ Credit card/ Online through CEB website (www.ceb.lk))
  - e. Amount paid
  - f. Identification of payment counter
- 6.4 The charges due in the Electricity Bill can be paid at CEB POS counters located at the CEB Head Office, some Provincial offices, some Area offices and at some branches of the People's Bank. A list of bill payment options is available at our website (www.ceb.lk)
- 6.5 The charges due in the Electricity Bill can also be paid at most of the other Banks Post Offices and many Supermarkets. Customers can obtain information regarding payment locations from their Area Electrical Engineers. Payment locations are given on the reverse side of the Electricity Bill.
- 6.6 Customers can contact their respective Area Electrical Engineer with regard to any query relating to the payments of charges in the Electricity Bill.

#### 7. Consumers in default

- 7.1 Customers are informed of their electricity consumption, by a way of the Electricity Bill. The duration between two meter readings which constitute the statement period, is usually 30 days. The adjustment required for any variation of the statement period is made by the meter reader when the Electricity Bill is issued. Retail Customers and Bulk Customers are provided a grace period of 30 days and 15 days respectively to pay the charges for the period indicated in the Statement of Account.
- 7.2 If the charge for the period identified in the Electricity Bill is not paid in full within the grace period stipulated therein, interest will be charged monthly on the total outstanding amount at a rate and for the period approved by the Commission.
- 7.3 In addition a disconnection notice i. e. intention to cut-off supply may be issued in writing providing a period of not less than ten days i. e. requisite period to pay all charges due to the Distribution Division 02 in respect of the supply of electricity to any premises or the provision of any electricity meter, electric line or electric plant for the purpose of the supply.
- 7.4 If all the charges due are not paid within the requisite period, we may cut-off the supply of electricity. However, the supply of electricity will not be cut-off after working hours on weekdays or on weekends and holidays.
- 7.5 The supply of electricity shall be resumed within two working days only upon the payment of amount in default, expenses of disconnecting and reconnecting and the security deposit, if requested.
- 7.6 At present, there are no concessionary payment schemes available for Retail Customers who are in default for more than 30 days and for Bulk Customers who are in default for more than 15 days.

# 8. Provision of services for Customers who are disabled, chronically ill or of pensionable age

Customers who are disabled, chronically ill or of pensionable age may request any of the following from the relevant Area Electrical Engineer:

- a. A pre-payment meter, if such facilities are available;
- b. Re-positioning of the meter, which will be undertaken and subject to accessibility of the meter by the meter reader, after payment of the cost estimate;
- c. Advice on the use of electricity and energy conservation
- d. The charges for the above will depend on the nature of the service and the Charges approved by the Commission.

# 9. Consumer complaint handling procedure

- 9.1 Any complaint with respect to the supply of electricity can be made at the E-City or the respective Area Engineer's Office. Complaints can be made in writing (via post, fax or email) or verbally (by visiting our offices or over the telephone). All written or verbal complaints will be acknowledged and a reference number will be provided. The reference number should be used in all future correspondence on the matter.
- 9.2 Complaints with respect to Breakdowns can be lodged via the contact number stated in the Electricity Bill. However, if no action has been taken within a reasonable time, in respect of such complaint, the matter should be referred to the respective Area Engineer.
- 9.3 In general, complaints will be attended to within fourteen (14) days from the date of the complaint.
- 9.4 If any matter needs to be referred to a higher authority (e.g. Deputy General Manager) the Area Engineer will inform the Consumer of the same and the time period that will be taken to attend to the complaint. Nevertheless, all complaints will be attended and resolved within twenty eight (28) days from the date of the complaint.
- 9.5 If a complaint is not attended to within fourteen (14) days or if the Consumer is not satisfied with the resolution provided by the E-City or the respective Area Engineer's Office, the Consumer may be refer the matter to the Provincial DGM.
- 9.6 On such reference within a period of fourteen (14) days, the Provincial DGM, shall:
  - a. ensure that the Consumer is attended to or the matter is resolved by the Area Electrical Engineer; or
  - b. respond to the Consumer with the reasons for not resolving the matter
- 9.7 If a satisfactory solution to the complaint is not received from the Provincial DGM, the Consumer may refer the matter to the PUCSL. An introduction to and the contact details of PUCSL is given in **Annex 7**.
- 9.8 We will maintain records on all communications (including complaints) received by us and the actions taken on the same for future reference and monitoring purposes of the PUCSL.

# 10. Procedure with respect to entering Customer's premises

- 10.1 Our authorized staff may visit a Customer's premises from time to time for various matters in connection with the supply of electricity, such as ascertaining the register of the Electricity Meter, restoration of supply in case of breakdown in the supply of electricity, maintenance of Electric Lines, Electric Plant, Felling or lopping trees, energy audits and data collection etc.
- 10.2 They have been issued identity cards by the CEB and will produce evidence of his or her authority for such entry, if required to do. In addition, some of our staff has been provided with official uniforms with the CEB emblem. Persons who have been hired/ contracted (but not employed) by us are always accompanied by an authorized staff of us.
- 10.3 Our authorized staff is trained and skilled personnel and they are able to advise and assist Consumers in matters connected with the supply of electricity.
- 10.4 Customers will be informed in advance about routine visits to their.
- 10.5 In the case of routine work (such as inspecting an electric line or plant and reading or removing an electric meter, etc. our authorized staff may enter any premises from 8 a.m. to 5 p.m. Further, our authorized staff may also enter the premises during such time to discontinue the supply of electricity and to remove the meter where an offence has been committed under i.e. intentionally or negligently damaging an electrical plant, line or meter belonging to us.
- 10.6 For the purpose of placing a new electric line or new electric plant in place of, or in addition to, any existing line or plant, a three (3) days' prior notice will be given to the occupier of the premises. The nature and the extent of the work to be carried out will be specified in the notice. However, in the case of an emergency, a three (3) days' notice may not be given, but a notice will be given as early as possible.
- 10.7 Any person who requires additional safeguards in entering his or her premises due to security or other reasons, arrangements can be made to provide such safeguards upon request.
- 10.8 We will pay reasonable compensation to the owner of the land or premises for any disturbance, disability or damage that may be caused pursuant to the entry by our authorized officers.
- 10.9 If all reasonable efforts, other than by the use of force to gain entry to the premises for any legitimate purpose(s) prove unsuccessful, we may apply, ex parte, to the Magistrate's Court having jurisdiction over the place where the premises is situated for an order authorizing the Distribution Division 02 for an officer authorized by us to enter the premises by force. Also any cost incurred in obtaining such an order is recoverable as a civil debt from the owner or occupier of the premises to which the order relates.

# 11. Efficient use of electricity

- 11.1 From time to time, we will distributes informative material on efficient use of electricity and also provide tips on efficient use of electricity printed on the reverse side of the Electricity Bill.
- 11.2 Consumers may make enquiries about the efficient use of electricity from the respective Area Electrical Engineer.
- 11.3 In addition, we will make Consumers aware of any guidance on efficient use of energy notified by the Sri Lanka Sustainable Energy Authority (SLSEA) or the PUCSL.
- 11.4 Consumers may also seek expert opinion on efficient use of electricity from the 'Sustainable Energy Authority' (SEA). (The contact details of SEA could be obtained from the Area Electrical Engineer's Office.)

# 12.Planned & Unplanned Interruptions to the supply of electricity

- 12.5 Interruption to the supply of electricity may be due to a Breakdown, an unplanned power interruption or a planned power interruption.
- 12.5.2 In the case of a Breakdown, we have no control over the incident as it is purely accidental. The Consumer is requested to inform us of any Breakdowns as described in Section 2 of this code. This is important as we have no automatic means of identifying Breakdowns, unless it is a large electrical system failure. Also, any person may contact us to obtain information on a breakdown including the cause for such breakdown.
- 12.5.3 When an electrical system abnormality or any other condition poses a potential threat to the electrical system in particular and to the public in general or when a situation develops which can cause damage to the electrical system, public property or human life, that part of the system may be interrupted either automatically or manually. This kind of situation is referred to as an unplanned interruption and we have no way of informing Consumers about such unplanned interruptions to. Any person may contact us to obtain information on an unplanned interruption including the cause for such interruption.
- 12.5.4 When operational and maintenance work requires the electrical system to be interrupted, we will carry out planned interruptions. These interruptions will be pre-scheduled and Consumers will be informed about the tentative interruptions either by means of a notice in the print or electronic media, by a public announcement, or by individual notices to affected Customers. The supply will be restored as indicated in such notices.

#### 13. Meters

#### 13.1 Retail Customers

Retail Customers are provided with electro-mechanical type, Class 2.0 or superior kWh energy meters (single phase or three phase, as the case may be). In some cases, based on our and/ or Customer's requirements, Customers are provided with electronic meters. The meters are installed on the Customer's premises and at a secure location.

The energy meters for Retail Customers are fixed at a convenient and safe location inside the Customer's premises, in such a manner that the Customer is able to read the meter at any time he/ she wishes to do so.

#### 13.2 Bulk Customers

Bulk Customers are provided within energy meter (kWh) and a maximum demand meter (kVA) (The maximum demand meter measures the maximum power Demand of the Bulk Consumer during an integration period of 15 minutes) and charged under the relevant tariff category. Presently, most of the Bulk Customers are provided with Poly phase Programmable Meters (PPM), which can measure both the energy consumption and the maximum demand. These meters are of Class 1.0 or superior, and the integration period is 15 minutes for kVA measurement. They are usually installed inside a separate enclosure. These meters are usually connected to the Load by a Current Transformer (CT) of either Class 0.5 or Class 0.2 depending on the specific requirements. Three-phase, four wire meters are used for Low Tension-metered Bulk Customers and three-phase, three-wire meters are used for High Tensionmetered Bulk Customers. The new PPMs installed at Bulk Customer's premises are programmed for Time of the Day Tariff (TDT) metering, and may have the capability for remote reading. The energy and demand meters for Bulk Customers are fixed inside a secured enclosure, in such a manner that the Customer is able to read the meter at any time he/ she wishes to do so. However, at the time of installation and upon request, meters can be fixed at a convenient location, so as to have viewing facilities inside the secured enclosure. We will also consider retrofitting the viewing facility, at Customers cost, provided retrofitting is practically possible

- 13.2 Our Meter Testing Laboratory staff, Area Maintenance Units and Energy Management Branch or other authorized officials would undertake testing of meters from time to time.
- 13.3 Consumers may request us to test the accuracy of the energy meters installed on their premises at any time by paying a meter testing fee approved by the PUCSL. A retail supply meter should work within an accuracy limit of  $\pm 2.5\%$ . If the meter is found to be working outside such accuracy limit, it will be replaced at our cost and the testing fee will be refunded. Also the Customer will be refunded any amounts over-charged (due to over-registering), in

- accordance with the methodology for estimation of energy approved by the PUCSL.
- 13.4 All our meter readers are provided with a uniform and an identity card issued by us. Consumers can request our meter readers to prove their identity and authority prior to entering their premises. They are duly trained to read meters, issue the Electricity Bills as well as to inspect meters to check whether they are in proper order for correctly registering the quantity of electricity supplied. However, we suggest that Customers to also verify the meter reading and the date of meter reading, and bring any discrepancy to our notice at the earliest, if a favorable response could not obtained by informing the same to the meter reader.
- 13.5 We assure that the Customer's premises to which the meter reader visits would be no less secure due to his presence. However, in case any damage is caused to the Customer's property as a result of the visit by our meter reader, we would initiate an inquiry and compensate the customer accordingly, based on a complaint received in that regard.
- 13.6 If any person intentionally or negligently damages or causes to be damaged any electric plant, electric line or any part of any domestic electricity supply equipment (including lines and plant up to and including the electricity meter situated in a consumer's property), he or she shall be guilty of an offence under the SLEA. Hence, the Consumers are advised to take proper care of the meter installed on his/her premises and to immediately inform us of any incident that has (or suspected to have) resulted in any damage to the electricity meter.

# 14. Information about theft, damage and meter interference

Please note that extraction and improper use of electricity, damaging any electrical line, plant or meter belonging to a Licensee, altering the register of an electricity meter and preventing such meter from duly registering the quantity of electricity supplied are offences under the SLEA, and any person who commits such acts are punishable as prescribed there under. Hence, Consumers are encouraged to provide information regarding such acts committed by persons to the CEB. Such information could be reported to the CEB call centre over our Hotline **1987.** 

Where, any such electric plant, electric lines or meters are owned by another person or another Distribution Licensee, we will inform the owners of such theft, damage or any interference of the meter.

# 15. Securing the Grant of Way leave

In carrying out the activities authorized by our license granted by the PUCSL, it may be necessary or expedient to install and keep installed an electric line on, under or over a land. In such instance, we are required to obtain Way leave from the land owner or occupier.

In order to obtain a Way leave, we will issue a notice in terms of the SLEA to the landowner or occupier. For further details on the procedure being followed in securing the grant of a Way leave, please refer the Way leave guide lines issued by the PUCSL given in **Annex 8**.

# 16. Felling or lopping trees, or cutting roots in close proximity to electric lines or electric plants

Trees or branches of trees that come into contact with electricity lines are a major cause of power failures and can also cause fires and serious accidents. Therefore, minimum safety distances specified by the Regulations on Safety (extracts of the relevant annexure of the Regulations is given in **Annex 9**) needs to be maintained between trees and electricity lines in the vicinity.

It is advisable to arrange for such trees to be trimmed by a professional tree cutter who has experience in working close to electricity lines.

If not, whenever we observe any tree is or will be in close proximity to an electric line or electric plant (which has been installed or is being installed or is to be installed by us) as to obstruct or interfere with the installation, maintenance or working of the line of plant or as to constitute an unacceptable source of danger to public, we will issue a notice to occupier or owner (where the occupier is not the owner) requiring him or her to fell or lop the tree or cut back its roots so as to prevent it from having such interference or danger. Upon complying with the requirements of our notice, the landowner or occupier can recover from us any expenses reasonably incurred by him or her.

In case the land owner or occupier has any objection to the requirements given in the notice, he or she should inform us of the same through a counter-notice within seven (7) days of our notice. If we receive such a counter-notice, the matter will be referred to the Divisional Secretary who will make an order as he or she thinks just. If the land owner or occupier does not comply with the requirements of our notice and does not give a counter-notice, we will cause the relevant tree(s) to be felled or lopped or its roots be cut back.

In any case, in causing a tree to be felled or lopped or its roots to be cut back, we will carry out it in accordance with good arboricultural practice and so as to do as little damage as possible to trees, fences, hedges and growing crops. Also, we will ensure the felled trees, lopped boughs and root cuttings be removed in accordance with the directions of the owner or occupier of the land, and we will make good any damage done to the land.

In case, if you observe any tree which is in close proximity to an electric line or electrical plant, please inform us immediately in order to take required preventive action.

# 17. Public safety

17.1 Any person who is constructing a new building or renovating an existing building should get a clearance certificate from us if such building comes within the minimum safety distance specified by the Regulations on Safety (extracts of the relevant annexure of the Regulations is given in **Annex 10**).

#### 18. Annexes

- Annex 1. Information how to contact us
- Annex 2. Standard Contractual Demands
- Annex 3. Standard application form for new connection of electricity
- Annex 4. Standard Tariff Agreement
- Annex 5. Specimen Electricity Bill
- Annex 6. Estimation of Energy Consumption and Charges
- Annex 7. Public Utilities Commission of Sri Lanka (PUCSL)
- Annex 8. Wayleave Guidelines
- Annex 9. Minimum clearances from trees to Overhead Lines
- Annex 10. Minimum clearances from buildings to Overhead Lines

Annex 1: Information on how to contact us Western Province North

Area				
Engineer	Tele No.	Address	ECSC	Tele No.
		CEB ,191/13 B,	Kirillawala	011-2927374
Kelaniya	011-2925880	Maladolawatta Road,	Mawaramandiya	011-2977185
		Kadawatha	Delgoda	011-2402052
		CEB , No 87,	Negombo	031-2222125
Negombo	011-2235202	Kimbulapitiya Rd ,	Katunayake	011-2252100
		Negombo	Minuwangoda	011-2295875
		CEB, , No27,	Gampaha	033-2222998
		Oruthota Rd,	Break Down	
Gampaha	033- 2227944	Gampaha	Service	033-2222285
			Yakkala	033-2226849
			Kirindawela	033-2267285
		CEB, No 70	Veyangoda	033-2287285
Veyangoda	033-2287570	Banduragoda Road,	Nittambuwa	033-2280285
		Veyangoda	Pasyala	033-2285393
		CEB, Negombo Road,	Ragama	011-2959285
Ja - Ela	011-2232604	Thudella, JaEla	Wattala	011-2932285
			Ja-Ela	011-2236480
		CEB, No. B 245/1	Diulapitiya	031-2246285
Diulapitiya	031-2243026	Kurunegala Road,	Mirigama	033-2273285
		Diulapitiya	Dunagaha	031-2243300

# **Central Province**

		CEB, 18, Lamagaraya	North	081-4473682	
Kandy	081-2232091	Road, Kandy	Operation	081-2225038	
Kandy			Central	081-3801744	
			South	081-2388134	
	001	CEB, 360/7, Colombo	Ampitiya	081-2406590	
Peradeniya	081- 2388872	Road, Peradeniya	Yatinuwara	081-2570706	
	2300072		Eriyagama	081-2388285	
Vaturasthota	001 2400670	CEB, 85 C, Gohagoda	Waththegama	081-2476230	
Katugasthota	081 2499679	Rd, Katugasthota	Ambathenna	081-2302734	

Supply Services Code Annex 10-i

		CEB, 70 Beily Road	Nawalapitiya	054- 2222377
Nawalapitiya	054-2222363	Nawalapitiya	Gampola	081-2352385
			Kurunduwatta	081-2352285
		CEB, Digana Village , Digana , Rajawella	Digana	081-2374389
Kaalaaala	081-		Hasalaka	055-2257185
Kunadasale	2374283		Karalliyadda	081-2050091
			Udu Dumbara	081-4949192
		CEB, Thtakaya Road ,	Kegalle	035-2222514
	025 2222466	Kegalle	Thulhiriya	037-2278242
Kegalle	035-2222466		Rambukkana	035-2265285
			Moronthota	035-2278660
	•		•	
Matala	066 0000746	CEB, Nagolle Road,	Matale	066-2222470
Matale	066-2222746	Matale	Rattota	066-2054370
	224	CEB, 11 A, Poholiyadda Road, Galagedara	Poojapitiya	081-2307516
Galagedara	081-		Hataraliyadda	081-2464430
	2460149		Nugawela	081-2461783
				_
	035-2249025	New Kandy Road, Mawanella	Mawanella	035-2246091
Mawanella			Hemmathagama	035-2257647
			Dippitiya	035-2258852
	051-2242786	Nawalapitiya Rd, Bagatuluwa , Ginigathena	Maskeliya	052-2277363
Ginigathhena			Hatton	051-2222389
			Norton Bridge	051-2232208
	ara Eliya 052-2222918	Racecourse road, Nuwaraeliya.	Nuwara Eliya	052-2222343
Numero Elico			Lindula	052-2258232
inuwara Eliya			Thawalanthenna	052-2259505
			Rikillagaskada	081-2365366
	066-2283442	Kurunegala road, Dambulla.	Dambulla	066-2283099
Dambulla			Naula	066-2246221
			Pallepola	066-2247719

Supply Services Code Annex 10-ii

# **Eastern Province**

			Trincomalee	
			(Town)	026-2222376
		050 1	Trincomalee (Love	
Trincomalee	026-2222301	CEB, Love Lane,	Lane )	026-2221014
		Trincomalee	Kanthale	026-2234285
			Muthur	026-2238285
			Kinniya	026-2236285
			Ampara	063-2222285
	067-2777200		Akkarapaththu	067-2277200
Ampara		CED D.C. Cononqueles	Inginayagala	063-2242085
		CEB, D.S. Senanayake	Weeragoda	063-3632385
		Mw, Ampara	Dehiattakandiya	027-2250274
			Hingurana	063-2240412
			Mahaoya	063-2244078
			Batticaloa	065-2222946
		Carayana Daad	Valachchenai	065-2257712
Batticaloa	065-2224439	Saravana Road, Kallady, Batticaloa	Kattankudy	065-2245796
		Kallauy, Batticaloa	Kaluwanchchikudy	065-2250085
			Eravur	065-2240088
			Kalmunai	067-2229285
		CED NUIDA Duildina	Samanthurai	067-2260285
Kalmunai	067-2229276	CEB, NHDA Building , Kalmunai	Sainthmarathu	067-2223904
		Namilullai	Nindavur	067-2251028
			Addalaichchenei	067-2278705

Supply Services Code Annex 10-iii

Supply Services Code Annex 10-iv

# Annex 2: Standard contractual Demands available to CEB Customers

# **Single Phase Customers**

• 30 A

# **Three Phase Customers (Retail Tariff Customers)**

- 30 A
- 60 A

# Three Phase Customers (Bulk Tariff Customers: metered at 400/230 Volts nominal)

- 63 kVA
- 100 kVA
- 160 kVA
- 250 kVA
- 400 kVA
- 630 kVA
- 800 kVA
- 1000 kVA

Three Phase Customers (Bulk Tariff Customers: metered at 11, 000 Volts nominal and above)

# In addition the existing / prospective customers can request for the following services

- Single phase to 3 phase conversions
- Augmentation of outdoor bulk supply substations (11 kV/LV, 33 kV/LV)
- Construction of new LV lines
- LV line conversions (1ph/3ph, 2ph/3ph, conductor change)
- Combined run of LV line on new/ existing MV line

# Annex 3: Standard application form for new connection of electricity

[Sample application form in use is provided below]

				කාර	ගාලිග	೫೯	ලය)	රත	യക്	(2)								
				FOR	t OF	TH	CE I	USI	E ONI	LΥ								
පයදුම	තර අංක	ය :			]		1		'			<u> </u>						
[ දිනය		7						Ш.			. –	<u>i</u>			<u> </u>	$\perp$		
	චවුවර		.l	., l.,		2					ļ <u>.</u>							
		ණු දිනය 20		4c2 £		- 1201	:	α					කලා (ලෙ			3/03/03	60	
e tegux	මෙනිනු ස	ල දිනය 20		ာတဗာ					5		ಶಾರಾಚ		್ಷಚೀಡ					
				1.0	#GB#	ଓ ଫ	ഷയ	<u>:</u>				සානු	ැමටි අම	<u>ක</u> ය	<u>E</u>			
		_																
		<b>36.</b>	Sec.	ලේව)ව	ved a	-5\u	:62 <b>P</b>	م (ماد)	36.801	elca.o	S A	003						
	<b>F</b> (	季月		LICA:									מיים	CIT	εv			
	<b>V</b>	<b>A</b> .	AFF	DICA.	11(7)	<u> 1. F.3</u>	<u> </u>	X X X .	2301		. Or	ال الليالية	VIII.	EÇI,	h-0-			
	•																	
				وم مراجع			·= -		+		Sudin							
වැදිගත (සංථෘණ	ට :- මුලමු පණර ලමාණ	ම් <b>පතු</b> ක සම්පූර් අතුම් පතුක	യാ മാധയാധ അവസ്ത	യുടെ അവ സ്ത്രേത്ത	, යාපා කරය	as. Fist	ට ය නීත	ଅଟେ (୧ ଜୟା ହିନ୍ଦି	ට පලාසා මත ලක්ව	AC EX n MOVO	iacenn Nachan	s scač) s	യാർ കുട	ത്തി				
		e instruction													he CE	EB co	onsu	me:
		relevant to th			prositi i					.,,		10.000						
00																		
01.	අගදුම්ක	දරුවෙන් සම්පූර්ණ	ന ക©െ ഗാ⊦(	වුවනය	:								-,,					
	(ఖంట్రజ్	කැපිටල් අකුරීම	ර ලිගන්න)					,										
	=		_															
	INEITIE	and Address	от арриса	111									***************************************		,			
													***************************************					
02.	පුලකුරු	. සමන නෙම න	විදුලි කැප	කුම ලබා	ගණප	හ ස්ව	්න හැ	ನ ಧಾಕ	දිපුරක i	ලිට්න	ය : (ඉ	ංශුිසි	තැව්වල්	द्मा ह्य	්ජ ලි	යන්න.	.) aq	<b>)</b> @
		වෙ සෙර Rev																
		of the Applica			d the	ado	iress	of t	he prei	mise	s who	re el	ectricit	y cor	necti	an st	nould	bc
	canne	ated. (In block	( capitals.)	ì														
	1 1	1 7 1 -			_		_			-				_		$\overline{}$	1	Т
		<del>  '</del>			!								ļ <del></del>		<u> </u>	₩	_	-
		1 :	ļ	·	į					-					l			
	7	T	i			_				$\neg \vdash$						T		7
	—-÷—	<del></del>	<del>!</del> -	-	<del>i                                     </del>		$\vdash$	<del>                                     </del>	<del>i                                    </del>	i		<del>i                                     </del>	<del>                                     </del>		+	+	<del>                                     </del>	<del>)                                    </del>
									⊥ .	ļ		!	١.	ı	Ţ	l	Į	ļ
03.	ජාතික	නැළුගුම්පත්/රිග	දරු බලපත්	ි මෙනා සිද	೯.ವೆ	ගමන්	බලද	ුත් ද	ලකය:									
	තිකුත් ස	කල දිපාය		[ජ	ලා ප	ಲದಗ	40	දම්පැ	ව උමෙල	୍ଦ୍ରଭୁଦ	නැත්ත)							
		o:/Driving Lice																
	Date o	fissue			,(8	30en	ಾಟ್ ರ	உள்	එවන්න	. / F	Please	atta	ch a ph	oto (	copy)			
0.4		are a Mar day of	1 42 <b>6</b>															
04.	4.1.	අතරම්කරුගෙ Openantion		dicant					:								······	
		Occupation	or me app	лісані														
	4.2.	සයදම්කරු ර	රතිශාව කථ	ත ප්ටාන	ടർ ഉ	ക്കാ	,											
	7.87	Address of								••••	,		·····					
	4.3.	අගදුම්කරු ර	රක ජායාක	න ස්ථාන	සේ හු	රසවා	න අං	ಹಿದ	:									
		Telephone i																
OG.		ා යාංකව (පුතුව					٠	·····		<u></u>		· · · · · · · · · · · · · · · · · · ·		· · · · · · · · · · · · · · · · · · ·				
	Teleph	none riumber	(Hesidenti	ai, Meb	ile)													
OB.	Sig Res	අයදුම් කරනු (	ഡി <b>ത്രത</b> ്ത്	දිනිකරුද <b>්</b>	(a) జాగాగ	Section	o#6 &	agy R.	കാര കഴ	- 80cc	١							
JU.		කුලුව කරනා ( අතුල්ම කරනා (																
		whether Appli																

එදුලි සැපසුම අවශාපතාවක .  අඳාල Category of supply	, කොටුවේ "x" යොදන්න.) - (Mark "x" in the relevant cage)	
Paredout or subbit	(NIAIN X III the retevant cage)	
ගේමදාර කාටයුතු යාදනා /	කේවලය / Hotel	ආගමික ස්ථානයන් සඳහා
Domestic		Religious Place
මනල් නිවස / Multi-storey	වෙළඳ සෑල / Commercial	වී මොලක්
building	Establishment	Rice Mill   විදුලි පැත්තුණි කණ්තු කතින වැඩ
ශල් මන්ලක් South Legendray	ලි ඉරහ මෙලික් Saw Mill	ි පැමණි වෙත්ත්
Metal crosher	Jaw Will	Work shop using electric
		welding plant.
වකලා මෝවර සහිත ලි ක <del>ළ</del> න	eoillO / සමුකර්අ	රජයේ කාර්යාලගක් නෝ චෙනන්
ගන්තු ඇතුලත් වැඩපලක් Navada posta industria		ಶೀಖಕ್ರಾದ , Government Office or Other
Wood work industry		Work shop
	!	· · · · · · · · · · · · · · · · · · ·
අධ අතර මෙන ගත්තා උපකරන	සතිත ශල් <u>කවන යන්න. මි ඉරන ය</u>	න්තු. විදුලි පැස්සම් සන්හ සහස නව
වකලා බමවන <u>සඟින ලි සැමීම්</u> අ	නා ලි කාර <b>ුයම් යන්න. නොන්කි<u>ට් මි</u>න</b>	<u>නේ, ම්රික් මෙම්වේ යනාදි විදුම උපකර</u>
<u>ාැපයුලෙන් භාවිතා කිරීමට බැබුපො</u>	<u>පරාත්ත වන්නේ නම්, එම එක් එක් උ</u>	<u>පසරෙනාවල පරි කර පැති බමවිත (Mic</u>
<mark>ාට්තාවයන් (ඇඹ) වෙන් වෙන් වශ</mark> ා	ලෙන් පනත සහහන් ජංක 12 දරණා ජේ	<u>දය යටතේ ඉචිරිපත් කරන්න.</u>
ඉල්ලුම්කරු නම්න් ලං.වී.ම. පවතින්	විදුලිය ලබා ගෙන ඇති ස්වානවල විර	ජතර පනග <b>කඳ</b> හන් කරන්න Please
the details of the other connecti	ion that you have already taken fro	om ÇEB.
രൂത്തി വാതവം ! Account No :	ක්ටානුගේ නුම සහ	ത്രയാ / Name and Address
<u></u>	1	
	<del>_</del>	
	_	
පැයදුම් හරුණු ලබන සැපැයුම් ගුඩා		
වති සඳහන් නිකුමේ අංකාන :	HPMHPHPPPP	Manu
වති සඳහන් නිකුමේ අංකාන :	HPMHPHPPPP	Manu
වති සඳහන් නිකුමේ අංකාන :	HPMHPHPPPP	Manu
වති සඳහන් ගිනුම් අංසය : The account number of the l requested	Electricity bill of immediate Neig	Manu
වති කඳුකුත් නිසුම් අංකන : The account number of the l requested පොළුකුන්හිල්ල සහාදුම්තර ඇති ආස	Electricity bill of immediate Neig	whor of the premises where sup
වති සඳහන් ගිනුම් අංසය : The account number of the l requested	Electricity bill of immediate Neig	whor of the premises where sup
වති සඳහන් නිසුම් අංකය : The account number of the l requested පොඩසැගිල්ල සහැදුම්සර ඇති ආර Type of internal wiring	Electricity bill of immediate Noig කරය : එකළා / ගෙසලා : : Single phase / Three p	whor of the premises where sup
වති සඳහන් නිසුම් අංකය : The account number of the l requested පොඩසැනිල්ල සහැදුම්තර ඇති ආස Type of internal wiring අතුපුණුර සහැදුම් හිමකර ඇත්ද	Electricity bill of immediate Neig කරය : එකළො / හෙතළා : : Single phase / Three p : අහා / නැත :	hbor of the premises where sup
වති සඳහන් නිසුම් අංකය : The account number of the l requested පොඩසැගිල්ල සහැදුම්සර ඇති ආර Type of internal wiring	Electricity bill of immediate Neig කරය : එකළො / හෙතළා : : Single phase / Three p : අහා / නැත :	whor of the premises where sup
වති සඳහන් නිසුම් අංකය : The account number of the l requested පොඩසැනිල්ල සහැදුම්තර ඇති ආස Type of internal wiring අතුපුණුර සහැදුම් හිමකර ඇත්ද	Electricity bill of immediate Neig කරය : එකළො / හෙතළා : : Single phase / Three p : අහා / නැත :	whor of the premises where sup
වති සඳහන් නිසුම් අංකය : The account number of the l requested පොඩසැගිල්ල සහැදුම්පර ඇති ආග Type of internal wiring අතුකුණුර සහැදුම් හිමකර ඇත්ද Whether internal wiring is comp	Electricity bill of immediate Noig කරය : එකාලා / හෙතලා : : Single phase / Three p : අඟ / නැත : pleted : Yes / No :	whor of the premises where supplied that the premises where supplied the premises where supplied that the premises where supplied that the premises where supplied that the premises where supplied the premises where
වති සඳහන් නිසුම් අංකය : The account number of the l requested පොඩසැගිල්ල සහැදුම්පර ඇති ආග Type of internal wiring අතුකුණුර සහැදුම් හිමකර ඇත්ද Whether internal wiring is comp	Electricity bill of immediate Neig කරය : එකළො / හෙතළා : : Single phase / Three p : අහා / නැත :	whor of the premises where supplied that the premises where supplied the premises where supplied that the premises where supplied that the premises where supplied that the premises where supplied the premises where
වති සඳහන් නිසුම් අංකය : The account number of the l requested පොඩසැගිල්ල සහැදුම්පර ඇති ආග Type of internal wiring අතුකුණුර සහැදුම් හිමකර ඇත්ද Whether internal wiring is comp	Electricity bill of immediate Noig කරය : එකළා / ඉහළාලා : : Single phase / Three p : අඟ / ඉහළා : pleted : Yes / No :	hbor of the premises where sup phase:
වති සඳහන් ගිනුම් අංකය : The account number of the life requested පොඩසාවේල්ල සහැදුම්පාර ඇති ආය Type of internal wiring අතපන්තර තනැදුම් නිමකර ඇත්ද Whether internal wiring is comp	Electricity bill of immediate Noig කරය : එකලා / හෙතලා : : Single phase / Three p : ඇත / හෙත : pleted : Yes / No :	whor of the premises where supplied that the premises where supplied the premises where supplied that the premises where supplied that the premises where supplied that the premises where supplied the premises where
වති සඳහන් ගිනුම අංකය : The account number of the life requested පොඩසාගිල්ල සහැදුම්සර ඇති ආය Type of internal wiring Whether internal wiring is comp	Electricity bill of immediate Notig කරය : එකළා / හෙතලා : : Single phase / Three p : ඇත / හෙත : oleted : Yes / No : කිටුවීම පිළිබඳ විස්තර , Defails of In o of lamp points)	where supplies the premises the premises the premises the premise the prem
වති සඳහන් ගිනුම අංකය : The account number of the life requested පොඩසාගිල්ල සහැදුම්සර ඇති ආස Type of internal wiring අතපණකර සහැදුම් හිමකර ඇත්ද Whether internal wiring is comp	Electricity bill of immediate Noig කරය : එකලා / හෙතලා : : Single phase / Three ; : ඇත / නැත : pleted : Yes / No : කිටුවීම පිළිබඳ එක්කර , Details of In o of lamp points) o of Fans)	stallation S& St
වති සඳහන් ගිනුම අංකය : The account number of the life requested පොඩසැගිල්ල සහැදුම්සර ඇති ආය Type of internal wiring අතපන්තර සහැදුම් හිමකර ඇත්ද Whether internal wiring is comp  1. විදුලි බුබුළු සංඛ්‍යාව (N 2. විදුලි පොඩස් සිටමන් සංඛ් 4. විදුලි කෙවුන් සිටමන් සංඛ්	Electricity bill of immediate Noig කරය : එකළා / හෙතලා : : Single phase / Three ; : අඟ / හෙත : pleted : Yes / No : කිටුවීම පිළිබඳ විස්තර , Defails of In o of lamp points) o of Fans) සහ ඇති 5 (No of Socket outlets – කාව ඇති 5 (No of Socket outlets –	stallation S& Stallation S& Stallation SAmp)
වති සඳහන් ගිනුම් අංකය : The account number of the I requested  යොඩනැගිල්ල සහැදුම්කර ඇති ආස Type of internal wiring අතෘත්තර තගැලුම් නිම්කර ඇත්ද Whether internal wiring is comp  ර න විදුලි ඉඩළු සංඛ්‍යාව (N 2. විදුලි සොදුන් පිටමත් සංඛ් 4. විදුලි කෙළින් පිටමත් සංඛ් 4. විදුලි කෙළින් පිටමත් සංඛ් 5. මේවාර් වල ධාරීතාවය (C	Electricity bill of immediate Neignado : එකළා / හොතලා :	stallation SE & ST
වති සඳහන් ගිනුම් අංකය : The account number of the I requested  යොඩනැගිල්ල සහැදුම්කර ඇති ආස Type of internal wiring අතෘත්තර තගැලුම් නිම්කර ඇත්ද Whether internal wiring is comp  ර න විදුලි ඉඩළු සංඛ්‍යාව (N 2. විදුලි සොදුන් පිටමත් සංඛ් 4. විදුලි කෙළින් පිටමත් සංඛ් 4. විදුලි කෙළින් පිටමත් සංඛ් 5. මේවාර් වල ධාරීතාවය (C	Electricity bill of immediate Neignado : එකළා / හොතලා :	stallation SE & ST
වති සඳහන් ගිනුම් අංකය : The account number of the life requested පොඩසැගිල්ල සහැදුම්සර ඇති ආස Type of internal wiring අතපන්තර සහැදුම් හිමකර ඇත්ද Whether internal wiring is comp  1. විදුලි ඔබුළු සංඛ්‍යාව (N 2. විදුලි හෙවුන් පිටමන් සංඛ් 4. විදුලි හෙවුන් පිටමන් සංඛ් 5. මෙව්වර් වල ධාරීකාවය (C 2. අංක 2 බමවනය (	Electricity bill of immediate Neignado : එකළා / පහසලා :	stallation SP Stallation Tol
වති සඳහන් ගිනුම් අංකය : The account number of the Irrequested පොඩසැගිල්ල සහැදුම්පාර ඇති ආස Type of internal wiring අතපන්තර සහැදුම් නිම්කර ඇත්ද Whether internal wiring is comp  1. විදුලි ඔබුළු සංඛ්‍යාව (N 2. විදුලි කෙළුන් පිටමන් සංඛ් 4. විදුලි කෙළුන් පිටමන් සංඛ් 5. මෙවර වල ධාරිතාවය (C 2. අංක 2 බලවනය (C 4. අංක 4 බලවනය 6. ටිරුලි නික්දී ගන්න (Flet	Electricity bill of immediate Neignado : එකළා / හොතලා :	stallation SP Stallation Tol
වති සඳහන් ගිනුම් අංකය : The account number of the leadersted scalars ගිල්ල සහදුම්කර ඇති ආස Type of internal wiring graped හර සහදුම් කිමකර ඇත්ද Whether internal wiring is comp  වීදුලිය විස් වීදුලි ඉඩුළු සංඛ්යාව - (N) වීදුලි නෙවුන් සිටමත් සංඛ්යාව - (S) වීදුලි හෙවුන් සිටමන් සංඛ්යාව - (S)	Electricity bill of immediate Neignaloc : එකළා / පොතලා :	stallation SP Stallation Tol
වති සඳහන් ගිනුම් අංකය : The account number of the Irequested යොඩනැගිල්ල සහදුම්කර ඇති ආස Type of internal wiring අතරෙන්ර තහැරුම් කිමිකර ඇත්ද Whether internal wiring Is comp  1. විදුලි බුබුළු සංඛ්යාව (N) 2. විදුලි හෙවුන් සිටමත් සංඛ්ය 4. විදුලි හෙවුන් සිටමත් සංඛ්ය 5. ජේවර සිටල කවුන් සිටමත් සංඛ් 6. විදුලි හෙවුන් සිටමත් සංඛ් 6. අතේ 4 බිමුවනය (C) 7. වායු සමීතරණ ගන්නු (Flet	Electricity bill of immediate Neignado : එකළා / හොතලා :	stallation SP Stallation Tol
වති සඳහන් ගිනුම් අංකය : The account number of the leadersted scalars ගිල්ල සහදුම්කර ඇති ආස Type of internal wiring graped හර සහදුම් කිමකර ඇත්ද Whether internal wiring is comp  වීදුලිය විස් වීදුලි ඉඩුළු සංඛ්යාව - (N) වීදුලි නෙවුන් සිටමත් සංඛ්යාව - (S) වීදුලි හෙවුන් සිටමන් සංඛ්යාව - (S)	Electricity bill of immediate Neignado : එකලා / හොසලා :	stallation SP Stallation Tol

C7.

13.	විදුලිග වසේ දි	වුදලිග ඔහා මිල්දීම කැ	රත ස්වානයට වෙයට පෙර විදුලිය තිබුනේ ආෂි ගිණුම් ආකය	(ශ්ඛ) වෙන තිබුණිද? මැව් ¦ නැත
			Electricity supply had been same premises before? Yes	
14.	ෂක්වාස			බම් <b>කරනා ඉදි කි</b> ීමට බිදුවේද? ; මව් / සෑන
	14.1.	තියළුම ඇත්තේ	දේපලකට ඉහළින් යෝවීත සේවා ආර්ගව කරුවන්ගේ නාම ලේඛනා	ව ඉදිකිරීමට ආත්තම් එම දේසලු අපිතිකරුගේ / අපිතිකරුවණ්ගේ හා කොලිපිහෙයන් පහත සඳහන් කරන්න.
		State w If yes, g	thether proposed Electricity linging the details of Names and	ne to be erected trough a third pairty? . Yes/No Address below.
		Name an	මිකරුවන්ගේ පාර්යවකරුවන්ගේ අ nd Address of relevant parties	
	1.			
	2.			
	3.			
	٠.			
	4.			
	5.			
	٥.			
	14.2.	සැමගි මෙම අ පලකෙන ඉද්රීපත් කුවය ම	නම්, මේ ගමණ අමුණා ඇති ඉඩ (ගදුම්පත සමන අමුණා එව්මට ්ත සියලුම ඉඩම හිමිගත් මෙම ( 3 කල සුතුය.	) සහ ලිපිනය
		03.	ඉතුමේ පිහිටීම විළිබඳව තොර කොට්ඨාසය, ඉතුමේ ගැලැස්මේ (	තුරු (වරිපනම් අංකය, බුවිනය. මුම නිලධාරී වසම, පුළේශීය ළේකම් රාසා සිටපත)
<u>i5.</u>	වෙන සිටීම සාවය	ත් අයකුගේ ට සිදුඩුවගෙ ඒ ලසුටින්	· ඉහල/නිවස/දේපල හරනා විදුලි	ම් කැටියට යනුතු හා නිවැරදි බව පුසාග කරන අතර, යම් තේතුවකින් මහ ඉදි කරන ලද බව යනාව පුවිකොත් හා ඒ අනුව විදුලි මග වෙනස් ා මුදල ගෙරීමට එකක වන බවට මෙගින් අත්සත් කර පොරොන්දු වෙමි. ා විති විරෝධතාවය සහය බවට සතාව විවිහොත් විදලි මාර්යය වෙනස් ගහ මවම්.
	ලකාර කොර	ව මෙම ස් අව චිතන්ඨ -	වාහයේ සුපි කිරීම අත් ආච්චිව ( කළ හැකි බව ද මම දනිමි.	ළට අමතරව කිසිම උපක්රණයක් විදුලිබද මන්කලයේ ලිඛිත අවතරයකින් බරිත අතාකරන බවද, එසේ වුවනොත් මෙම ප්වානකට සපයා පැති විදුලි
	cost	involved i Mained ar	in shifting the line if found ere	o and correct according to my knowledge and agree to pay any oted across any third party properties where no land clearance if the power supply until such time that dispute is settled and uit with out the permission of the CEB.
		දනය/[	Date : 20/	අයදුම්කරුගේ අත්සන / Applicant Signature

atures ald	ong the route	map to t	ne place	wnere	Electricity	supply	15 110000	SHOWING	рорина	highes m

16.

# ඉඩම් හිමියාගේ ඉඩම් හිමියන්ගේ කැමැත්ත පුකාශය

එක් එක් හිමිකරුවෙකු/පාර්ගවකරුවකු සඳහා ගිවිසුම් පුකාශන වෙන් වෙන්ව ඉදිරිපත් කරන්න. (ඒ සඳහා අවශ්ය අමතර පෝරම මෙම පිටුව ජායා පිටපත් කර ලබා ගන්න.) ඉඩම් තිමිකරුගේ/පාර්ශවකරුගේ නම සහ ලිපිනය: ..... ..... ළාදේශීය වීදලි ඉංජිනේරු, ලංකා විදුලිබල මණ්ඩලය. <u>විදුම් රැහැන් ඇදීමට කැමැත්ත පුකාය කිරීම.</u> .............లేంస్తోంది....... (ලිපිනය) (විදුලි ඉල්බුම්කරුගේ සම්පූර්ණ නම) ...... මතතාගේ/මතත්මියගේ නිවසට/වෙළඳුසලට/ස්ථානයට/විදුලිය ලබා ගැනීම යදුතා මගේ විතලය /ඉඩම/දේපළ උඩින් විදුලි රැතෑන් ආදීම පිළිබඳව මාගේ කැමැත්ත මෙයින් පුකාශ කරමි. ඉඩම් හිමියාගේ උත්සන දිනය : ..... අයදුම්කරුගේ නම ගා ලිෆිනය : මා විසින් ඉතන දක්වන ලද තොරතුරු සතන හා නිවැරදි බවට සහතික කරමි. මා විසින් ඉතත සඳහන් කළ ඉඩම් භිමියාට/හිමියන්ට අමතරව චෙනත් පයිතිකරුවන් හෝ වෙනත් පාර්ගවකරුවන් නොමැති බවත් යම් කෙයකින් කැමැත්ත සඳහන් නොකළ වෙනත් ඉඩම් හිමියෙකු මෙම යෝජිත විදුලි මග/සේවාව ඉදිකිරීමට සම්බන්ධව විරෝධතාවය සුකාග කළහොත් තෝ වෙනත් හේතුවක් නිසා විදුලිමග වෙනස් කිරීමට සිදුවුවහොත්, ඒ සඳහා වන වියදම් ගෙවීමට මා පොරොන්දු වෙමි. විදුලි අයදුම්කරුගේ අත්සන දිනය : 20 / / ඉඩම් හිමියන් හා විදුලිය ඉළ්ලුම් කරුවන් සම්බන්ධයෙන් සපයා ඇති තොරතුරු හා අත්සන් නිවැරදි බවට ස්භතික කරමි. ශුාම නිලධාටී සහතික කිරීම ළාදේශීය ලේකම්ගේ අනුමැතිය ඉඩම් තිම්යාගේ විදුලිය ඉල්ලුම්කරුගේ අත්ගත සහතික කිරීම [නිල මුදුාව හඹා යහතික කරන්න.) දීනය :- 20....... (නීල මුදුාව තුඩා සහතික කරන්න.) දිනය :- 20...../....../.....


# ව<u>ිදුලිය ලබා ගැනීම සඳහා සනාට කිරීමේ සහතිකය</u> (ගුාම නිලධාරි විසින් හා පුාදේශීය ලේකම් විසින් සම්පුථණ කළ යුතුය)

01.	අයදුම්කරුගේ සම හා ලිපිනය	;	
02.	විදුලිය ඉල්ලා සිටින ස්වානයේ ලිපිනය	:	
			***************************************
03.	විදුලිය අයදුම්කර ඇති ස්වානයේ වර්පනම් අං	කය :	,
04.	අයදුම්කරුගේ ජාතික ගැඳුනුම්පත් අංකය	:	
05.	අයදුම්කරු එම ස්වානයේ පදිංචි කාලය	:	
06.	විදුලිය ඉල්ලා සිටින පළිංචි ස්ථානය පිළිබඳව	තනවුරු කිරීම	
	(මෙහි බින්නක්කර අගිතිය/මද/කුලි/රජයේ නිල		
	කරන්න.)		
	$0.6.1$ . කුලි $ a_{ m c} $ තිලනිවාසයක් වේ නම් එහි අර්	<b>ජිතිකා</b> රුලෙන භාල	) සහ ලපනය
			<b>,</b>
			y
07.	පදිංචිය යනාව කිරීම පිනිස අදාළ කරුණු ගද	නු ලැබූ ලේඛණ	X3 :
08.	ජන්ද තිමි නාමලේඛණයේ අංකය		:
ലവാല്	මකරු ඉහත සඳහන් ලිපිනයේ ස්ථ්ර පදිංචිකරු	ාවකු බවත් ඔසු	ාව/ඇයට විදුලිය සැපයිම වෙනුවෙන් ස්ටීර
	ය සභාව කිරීම සඳහා ඉදිරිපත් කරනු ලබන		
කරමි.		_	
ගුම -	නිළධාටීමග් අත්කත :	පු)දේගය ලෝ	තම්මග අත්යාංහි :
	36 <b>3</b> ,00 <b>2</b> 40 <b>2</b> 0, ,		
වසම	ජා) අංශය :		
	නා අංඛය :		:
වයම හිල (	නා අංඛය :	නිල මුදාව	*

#### විදුලි සැපයුම ලබාගැනීම සදහා උපදෙස්

- 01. විදුලිග ගැපයිමේදී ශ්ටීර පදිංචිග සභාව කර ගැනීම පිළිබඳව ඇතිවන ගැටලු මහ හරවා ගැනීම සඳහා යම් ස්ථානයක අයිතිකරුවෙකු හෝ ඔදුකරු වියින් විදුලිය සැපයුමක් ඉල්ලා සිටි විට එම පදිංචිය තහපුරු කර ගැනීම පිණිස පහන සඳහන් ලියවිලි අතුරින් එකක් හෝ වැඩි පුමාණයක් ලංකා විදුලිබල මණ්ඩලය වෙත ලබාදිය යුතු බව සලසන්න.
  - අදාල ස්වානයේ හිමිකම් ඔප්පුව හෝ නර ඔප්පුව.
  - 1.2. පළාත් පාලන ආයතනයකින් නිකුත් කල අනුකුලතා සහනිකයක්.
  - 1.3. එකි ස්ථානයේ නිතුහනුකුල පදීංචිකරු/අයිතිකරු බවට හෝ/එහි තක්සේරු අංකය අදාල කොට්ඨාශයේ පන්ද නාම ලේඛණයේ සඳහන් බවට අදාල පුදේශයේ ගාම සේවක විසින් නිකුත් කරන ලද පුාදේශීය ලේකම් විසින් සනාව කරන ලද ලිපියක්.
  - 1.4. රජග විසින් හිවස/ඉඬම පුදානය කර ඇති විට අදාල හිප්පුව නොගැවරීමේ ලියකියවිලි/යභභීක.
- ೧?.. අන්යතු අයගේ ඉහිම් උඩින් යෝජිත සේවාව ලබා ගැනීමට අගේනම් ඉඩමේ අයිතිකරුවන්ගේ මාට්ය අවසර පත මේ සමහ අමුණා ඇති ආකෘතී පතුය එක් විකි හිමිකරුවන් විසින් වෙන වෙනම සම්පුර්ණ කර අයදුම්පත සමහ ඉදිරිපත් කල යුතුය. (මෙම ආකෘතියෙහි වැඩිපුර පිටපත් අවශෘ නම් පායා පිටළතක් අරගෙන සම්පුර්ණ කර ඉදිරිපත් කරන්න.)
  - යම් නෙගකින් තෝ පසුව ඉදිරිපත් කරන විරෝධතාවයකින් ගිබගේ සේවා රුකෑන් මාර්ගය වෙනස් කිරීමට සිදුවුවහොත්, ඒ සඳහා වැයවන සම්පුර්ණ මුදාල ඔබ විසින් දැරීමට එකත විය යුතුය. අන්කතු ඉඩමක් උඩින් විදුලි රුතෑන් ඇඳීම පිළිබඳව සම්පූර්ණ වගකිම ඔබ විසින් භාරගත යුතුය. වනජ අත්සන් ලිපි තෝ අසතන තොරතුරු සැපයුවහොත් ඔබට සපයනු ලබන විදුලි සැපයුම විසන්ධි කිරීමට කටයුතු කරන අතර, වයින් සිදුමිය හැකි අලාතය පිළිබඳව ලංකා විදුලිබල මණ්ඩලය වග කීයනු නොලැබේ.
- 03. විදුලිය ලබා දිමට පෙර අතපන්තර තතැදුම් සම්මත ඉංචිෂන්රු නිති වලට අනුකුලව (IEE) නිම කල යුතය, කෙවුන් පිටමන් (Plug) සඳහා තතැඳුම් කර ඇත්නම්, ඒ සැම එකක්ම මිනිතතට සම්බන්ධ කර ඒවා මිනියැදුම තළ මගින් මිනිගත කළ සඳසාදය.
- 04. ගැල්වනයින් කළ මිතියැවුම් නළ විශ්කම්භය අනල් 02 ක් සහ දිග අඩි 06 ක් විය යුතුය. (Farth Pipe)
- 05. කෙවුන් පිටමන් (Plug) සඳහා තනයල් කර ඇත්නම් මිහි කාන්දු මිදුවක් (Trip Switch) සවි කර තිබිය යුතුය.
- 06. පොළව මට්ටමේ සිට අඩි 05 ක් පමණ ඉහලින් පහසුවෙන් (මනු කියවිය හැකි වන සේ) ඛාතිර බිත්තියක මනුව සවි කිරිමට අවශා ලි කට්ට කැබලි සවිකර බැර තත අඩි 02 ක් දීග පිටතට වන සේ තැබීමට කටයුතු කරන්න. අවශා උපදෙස් සඳහා 02 රූප සටහන බළන්න.

- 07. යෝවා රැකැන පොළව මට්ටමේ සිට අඩි 10 කට වඩා උසින් සිටිණ සේ සවි කිරීමට අවශන 2"x2"x1/4 පුමාණයේ කෝණ යකඩය (අංක ()1 රුපය ලෙසව) සවිකර තැබීමට කටයුතු කරන්න.
- 08. විදුලිබල මණ්ඩලයේ විදුලි අධිකාරි විසින් හතැදුම පිළිබඳ, පරිපෂණයක් පවත්වා ඔහු අනුමත කරන්නේ නම්, පමණක් විදුලිය සපයනු ලැබේ.
- 09. අදාල ස්වානයට සේවාව සැපයීමට අවශ්‍ය ඇත්තමේන්තු කිරීමට අවශ්‍ය අනු මිනුම් කිරීමව ලං.වි.ම. නිලධාරියෙකු පැමිණි පසු සහියේ දිනක උදය වරුවේ අදාල පාරිතෝගික සේවා මධ්‍යස්ථානයකට ගොස් නිඛගේ ඇත්තමේන්තුවට අදාල ගෙවීම් වමුවරය ලබාගත හැක. එය මහජන බැංකුව මගින් ගෙවා පිටපත ආපසු ඉදිරිපත් කළ යුතුය. නමුත් ඇත්තමේන්තුව යකස් කිරීමට හා අනුමැතිය ලබා ගැනීමට අවම වශයෙන් දින 07 ක් ගත වේ.
- 10. විදුලි රුහැන් ඇදීමට යෝවීත මාර්ගයේ ගස් අතු කපා පෙළිපෙගෙලි කිරීම ඔබ සතු කාර්ගයකි. ඒ සඳහා ඇස්තමේන්තු නොකරන බව කරුණාවෙන් සලකන්න.
- 11. මෙම අයදුම්පතට අදාල අයස්තමේන්තුව නිකුත් කළ දින සිට දින 30 ක කාලයක් සඳහා පමණක් පලංගු වන අතර, එම කාලය ඉකුත් වීමට පෙර මුදල් බැඳිමට ඔබ අපොහොසත් වුවහොත්. ඔබ විසින් මෙම අයදුම්පතට ගෙවන අයදුම්පත් ශාස්තුව අවලංගු වේ.
- 32. නොකලා විදුලි බලය ලබාගෙන වනපාට කටයුත්තක් හෝ කර්මාන්තයක් / වැඩ පොළක් පැරමිග කිරීමට හිබ බලාපොරොත්තු වන්නේ නම් මෙම අයදුම්පත ලංකා විදුලිබල මණ්ඩලය වෙත ඉදිරිපත් කළ පසු.
  හබට අවගන විදුලි බලය ලබාදීමේ හැකියාව පිළිබඳව පරික්ෂා කරනු ලබන බැවින්, එසේ පරික්ෂා කිරීමෙන් අනතුරුව ඔබට විදුලිය ලබාදීය හැකි බව දැනුම දීමෙන් පසුව පමනක් අදාල විදුලි උපකරණ යන්නෝපකරණ අනතුරුව කිරීම සවි කිරීම හෝ මිළදි ගැනීමට කටයුතු කළ යුතුය.
- 13. මෙම අයදුම්පත නිසි පටිදි සම්පුර්ණ කර අදාල අනෙකුත් ලියකියවීලි සමඟ ඔබගේ බල පුදේශයට අයත් විදුලි පාරිභෝගික සේවා මධ්‍යස්ථානයට ලබාදිය යුතු වේ. ඒ සමගම අයේතමේන්තු කිරීමේ ගාස්තුව සඳලා පාරිභෝගික සේවා මධ්‍යප්ථානයෙන් ගෙවීම් වච්චරයක් ලබාගෙන මහජන ගැංකුව මගින් රු. 250.00 ක මුදල් ගෙවා ලදුපත් පිටපත් ආපසු හාර දෙන්න.
- 14. මෙම අගදුම්පත විදුලිය ලබා ගන්නා අයදුම්කරු විසින්ම අත්සන් කිරීම අනිවාර්ය වේ.

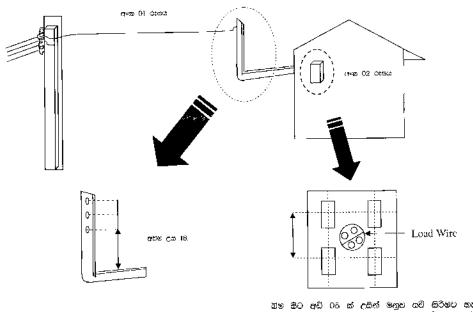

- නිවස තුලට ජලය කාන්දුවීම වැළැක්වීමට 2"x2x1/4" පුමාණයේ කෝණ යක්ඛයක් වනළයෙන් පිටතට සිටීන සේ රුපයේ දැක්වෙන පරිදි සවි කරන්න.
- 2) බී කරුව සවි කිරීමට අතල් 5/8" විශ්කම්භය සහිත ගිදුරක් විද තබන්න.
- 3) තොකලා සැපයුමක් සඳහා නම් කෝණ යකඩයේ සිදුරු තුනක් අවශය වන අතර, තවි අතර පරතරය අතල් 6" ක් වන සේ සිදුර විද තබන්න.
- 4) නොහෙතමෙන ස්ථානයක මනු පෙට්ට්ය බාතිර බිත්තියට සව කිරීම සඳහා ලි කට්ට කැඹලි (D.T. Plug) 4 ක් රුප සටහනේ දැක්වෙන ලෙස බිත්තියට සම් කරන්න.
- 5) මනු පෙට්ටිය සවි කිරීම. (තෙකලා සැපයුමක් නම්) පාරිතෝගික සේවා මධපස්වාන භාර වීදුලි අධිකාරි මනතාගේ උපදෙස් ලබා ගෙන ඒ අනුව කටයුතු කරන්න.
- 6) බිත්ති කපරාරු කර නොමැති නම් අවම වශයෙන් මනු පෙට්ටිය සව කරන කොටස පමණක් වත් නිසි පටිදි කපරාරු කර හැබීමට කටයුතු කරන්න.
- 7) සේවා තත සේවා කරුවේ පිටතින් පෙනෙන ආකාරයට මනුව දක්වා සවකල යුතු වේ. මනුව බිත්තිය තුළට ගිල්වා සවි කිරීමට හා බිත්තිය ඇතුළතින් සේවා හත යෙදීම යඳුගා බට යොදා තිබීම නොකළ යුතුය.

#### ඔබ ද.නගත යුතු කරුණු :

හතුගේ හේවා ගැපයුම හඳුනා ලං.වී.ම. වෙත මුදල් හෙවූ පහු එම කාර්යය නිම කරදිම සඳහා ලං.වී.ම. විසින් පත් කර ඇති කොන්තුාත්කරුවන්/ලං.වී.ම කාර්ය මණ්ඩලය වෙත භාරදෙනු ලබන අතර ඔබ විසින් ඔවුන්ට කිසිම තේතුවක් මත මුදල් දීම භාන්ඛයක් සැපයීම, කණු භාන්ධ පුවාශනය කරදිම. කුණු ඇද දීම, වළවල් කපාදීම හෝ වෙනත් කිසිම ආකාරයක කියාවක් කිරීමට අවගන නොවේ.

වුදුලි සේවාව නැපයිම සඳහා පැතිරාන සොන්තුගේකරුදෙන් හෝ ලං.වී.ම. ගිසිම සේවකරොය වේග මූදැල් /මත්දවන ආහාරපාන ලබාදීම ඔවුන් විසින් ඉල්ලා සිටිම නිති විරෝධි වේ. ඔබගේ සේවකරාය වේග මූදැල් ලම්හන්ධයෙන් ඔබ සැතිමකට පත් නොවන අකාරයේ කටයුතු ලං.වී.ම. සේවකයකු හෝ කොන්තුගේකරුවෙකු අතින් සිදුවී තීබේ නම්, ඒ සම්බන්ධයෙන් විදුලි ඉංජිනේරු වැලිගම (041-2250344) වෙත දුරකවනයෙන් හෝ තොන්තුගේකරුවකු පත්ත සඳහන් ලිපිනයට දැනුම් දෙන්න. කාර්යාලයට පැමිණෙන්නේ නම් සතියේ වැඩ කරන ඕනෑම දිනයක උදුය වරුවේ පැමිණ නමුවන්න.

**පාදේශි**ය ඉංචිභෝරු, පාදේශිය විදුලි ඉංචිභෝරු කාර්යාලය, ලංකා විදුලිබල මණ්ඩලය. මනවීදිය, වැලිගම.

# **Annex 4: Standard tariff Agreement**

ලංකා විදුලිබල මණ්ඩලය இலங்கை மின்சார சபை CEYLON ELECTRICITY BOARD

විදුලිබලය සැපයුම පිළිබඳ ගිවිසුම

மின்சாரம் வழங்கலுக்கான ஒப்பந்தம்

# AGREEMENT FOR SUPPLY OF ELECTRICITY

- \* නව සැපයුමක්
- \* යලි ඇමිනිම

- 🗱 புதிய இணைப்பு
- \* மீண்டும் இனைத்தல்
- பாவனையாளர் மாற்றும்

\* New Connection \* Reconnection \* Change of Consumer \* (අදාල නොවන වචන කපාහරින්න. රාැ. ආඛය හා අදාහ කිරීමේලිය. Strike off whichever is not applicable.) අයදම්කරුගේ සම්පූර්ණ නම பாவனையாளரின் முழுப்பெபர் திரு./திரும*தி.*சேல்லி : Applicant's Full Name: Mr./Mrs./Miss: පැහැදීලි අකුරින් / නක් බැල්නිනින් /Block Letters) අයදුම්කරුගේ /රුගේ රුකියාව/බැක්කෙර්ගුනෑ ෑ ක් දෙනැழිම Applicant's Occupation අයදුම්කරුගේ වනපාර/රුකියා ස්වානය வினியைப்பதாரரின் வியாபாரம் செய்யும்/தொழில்புரியும் இடம் Applicant's Place of Business/ Employment අයදුම්කරුගේ පෞද්ගලික ලිපිනය விண்ணப்பதாரரின் தனிப்பட்ட விவசம் Applicant's Private Address සැපයුම අවශන ස්වානයේ ලිපිනය மின் வீதியோகம் தேவைப்படும் இடத்தின் விவரசம் Address where supply is required ගොඩනැගිලි අයිතිකරුගේ නම தானிச் சொந்துக்காரரின் பெயர் Landlords's Name ගොඩනැගිලි අයිතිකථාගේ ලිපිනය ±ானிச் சோந்தக்காரரின் விவாசம் Landlord's Address ගොඩනැගිල්ල පිළිබඳ විස්තරය :-වාසස්වානයක් (තට්ටු නිවසක් තෝ නිවසක්) ද ரின்சாரம்.தேவைப்படும் இடத்தின் விபரம் :-වානිජ කර්මාන්ත ආයතනයක් ආගමික ස්වානයක් ද යන වග தங்குமிடம் (தொடர் விடு. மாடி விடு. அல்லது விடு) வர்த்தக ஸ்தாபவம் Description of Premises :-கைத்தொழில் நிறுவனம் மத சம்பந்தமானவை. Residential (Apartment, Flat or House) Commercial

Establishment/ Industries/Religious.

(පසුව කෙරෙන කිසියම් වෙනසක් පිළිබඳව ලංකා විදුලිබල මණ්ඩලයට දැනුම් දිය යුතුයි) (இவற்றில் மாறுதல்கள் எதுவும் ஏற்படின் இ.மி.ச.க் த அறிவிக்க வேண்டும்) (Any subusquent change should be notified to the C.E.B)

සැපසුම අවශා වන දිනය மின்சாரம் தேவைப்படும் திகதி Date when supply is required

# වැදගත් දැන්වීම් முக்கிய அறிவித்தல் IMPORTANT NOTICE

මෙම ආකෘති පතුය නිකුත් කිරීමෙන් ලංකා විදුලිබල මන්ඩලය විසින් විදුලිය කැපයුමක් ලබාදෙන බවට ඇතවුමක් නොකෙරෙන අයදුම්කරුවත් විසින් තම ගොඩනැගිල්ලෙහි හතැදීම නිර්ම සඳහා වියදුම් දැරීමට හිරණය කිරීම හෝ විදුලිබල සැපයුම භාවිතා කිරීම සඳහා කියියම් සූදානමක් කිරීමට හෝ පෙර විදුලිබල සැපපුම ලැබෙන්නේ දැයි ලංකා විදුලිබල මණ්ඩලයෙන් නියම වශයෙන් දැනගහ යුතුයි. සම්පූර්ණ කරන ලද මෙම ගිවියුම් පතුය සේවා සැපයුම් හා ඇප තැන්පත් මුදල් ගෙවීමේ එවුළුරවල හා ශාඛා දෙවන පිටපත් සමඟ ආදේශීය විදුලි ඉංජිනේරු කාර්යාලයට තාර දිය යුතුවේ.

இப்படிவம் விற்போ சிக்கப்படுவதால் சபையினால் மின்சாரம் உடனடியாக வழங்கப்படும் என்று அர்த்துடல்ல. தமது இருப்பிடத்திற்கு கம்பியிடுகல் வேலைகளின் திபிரத்தம் செலவுகளை மேற்கொள்ளத் தீரமானிக்க முன்னரோ அல்லது இம்மின் வழங்கலை உபபோகிப்பதற்கான ஏற்பாடுகளைச் செய்யும் முன்னரோ, மின்சாரம் வழங்கப்படுமா என்பதைச் சபையுடன் தொடர்புகொண்டு உறுதிசெய்து கொள்ளல் வேண்டும். மின்சாரம் பெறுவதற்கான சேவைக் கட்டணமும் பிணைவைப்புத் தொகைக்கான கொடுப்பனவுப் பற்றுச்சீட்டும் இரண்டாம் பிரதியுடன் மின்சாரம் பெறுவதற்கான ஒப்பந்தப்

The issue of this form does not indicate that the Board will make a supply of electricity available. Applicants shoulld ascertain from the Board that the supply will be made available before they decide to incur expenditure of on wiring their premises or making any preparation to use this supply.

The agreement form should be handed over to the Area Electrial Engineer's Office along with the Branch copy/ies of the Paying in Voucher/s for the Security Deposit and service main charges.

	11201	
<b>ා</b> ටනන	1.	ඉහත සඳහන් ආකෘති පතුයේ පුකාශිත තොරතුරු පදනම් කර අයපත් සකස් කරනු ලැබේ. යෙසේ වුවද අය සුම
		වලට අදාලව පාරිභෝගිකයා විසින් සපයන ලද කිසියම් තොරතුරක් සාවදු නැවි පසුව කෙරෙන පිරින්සම් වලදී පෙල්
		ගියනොත්, සැපසුම් ලබා දෙන ලද දිනයේ සිට අයපත් නියමින අය කුමය අනුව පුතිශෝධනය කරනු ලබන අතර අවසුවත් සැපඩ සැපසුම් සිදුවෙනු මුදේදයක්වීමට පැමිදුවෙනු සිටුව සහ සමය අනුව පුතිශෝධනය කරනු ලබන අතර
		PRIGNA PICA PRO MICADA DA MANAGARA MISANIGANA RADA AND

- යිමායහිත සමාගමක් නම් මෙම ආකෘති පතුය සමාගම වෙනුවෙන් අත්සන් කිරීමට නිසි බලය ලත් අධ්පසක වරයෙකු කළමණාකාර වරයෙකු හෝ ලේකම්වරයෙකු විසින් අත්සන් කළ යුතුය. හවුල් වනපාරයක් නම් හවුල් වනපාරය වෙනුවෙන් එහි හවුල්කරුවෙකු විසින් මෙම ආකෘති පතුයට අත්සන් කරනු ලැබුවිට එයින් හවුල් වනපාර සහ අවස්ථාවේ සහ කලින් කල සිටින හවුල්කරුවා හෝ හවුල්කරුවන් බැඳි සිටින්නේ ය.
- 3Din மேகே தெரிவிக்கப்பட்டுள்ள விபுரங்களுக்கு அமைப் மின் கட்டமை அறவிடப்படும். எனினும் இதனைத் தொடர்ந்து நடைபெறும் ப்ரீரே தளைகளின் பொழுது வின்பைப்பதாரர் தெரிவித்துள்ள வியரங்கள் சபையின் இறப்பவவுகளைப் பாதிப்பதாக இருக்குமாடுன். ம் ன் கட்டணங்கள் மிள்சாரம் ஸ்டிங்கப்பட்ட நாளிலி தந்து பொருத்தமான இறப்புனவுகளுக்கு ஏற்ப மீண்டும் கணக்கிடர் வடும் இதன்படி பாவனைபாளர் இதுவரை காலமும் தறைவாக செலுத்திவந்த தொகையைச் சபைக்குச் செலுத்தவேண்டும்.
  - வரை பறுக்கப்பட்ட பொறுப்பு நிறுவனர் சார்பில் கைபொப்பமிட உரிய அதிகாரம் பெற்ற பணிப்பாளர். முகாமையாளர் அல்லது செயலாளர் கால் இப்படி வம் கையோப்பமியல் வேண்டும். கூட்டுறிறுவனமாயின் பங்காளியொருவர், திறுவனத்தின் சார்ப்போட் மற்றப் பங்காளிகள் சார்பு கவும் கைபெரப்பரிட்டிரம். இப்படியாக கைபொப்பமிடப்படுமிடத்து கைபொப்பமிடுபவர் கூட்டு நிறுவனத்திற்கும். பங்காளிக்கும் அல்ல அபங்காளியோருவதக்கோ தற்பொழுது அல்லப்பொழுது பொறுப்பாக இருப்பார்.
- Note Bills will be rendered based on the above declaration. If however, any information supplied by the consumer affecting the application of tariffs is found to be incorrect at subsequent inspections, bills will be revised on the appropriate tariff from the date to connection of supply and the consumer will be liable to pay all such under charges.
  - If a Limited Liability Company, this form should be signed by a Director, Manager or Secretary, duly authorised to sign on behalf of the Company. If a partnership, the form should be signed by a partner for and on behalf of the partnership and when so signed shall bind the partnership and the partners or partner for

විදුලි පිහිටැවුම පිළිබඳ විස්තර මුහුනුණ්යන්න් බැඳෑර Schedule of Installation	മംമയാള எண்ணக்கை No.	වොට්ස් පුමානා உබොඩුඩොණු Wattage	அலுவலக உயியாகத்தி FOR OFFICE USE	ந்த மாத்திரம்	ā
පහන් / නිහැස්කුයන් / Lights පංකා / නිහැසියන් / Fans වායු සම්කරන යන්තු නිහැසියන් Air Conditioners ගුවන් විදුලි යන්තු හෙරින් විදුලි යන්තු හෙරින් යන්තු ලෙස නෙරෙන් පන්තු ලෙස නෙරෙන් පන්තු වෙන් / නැතිරාදයන්/ Conkers ඉස්තිරීක්කා/නැති විදුරු යන්ත්/ Irons			අප තැන්පත් මුදල  U manamanalituli uනාජ්‍රවේණ නැති නැත්ව. Security Deposit  පෙවන ලද දිනය පෙනුණන්ග්රීය නියන් Paid on නියෝග පත් අංකය ක්‍රාන්ත්රීය නියන් විප්‍රම සංක්‍රිය නියන් අපතුම සංක්‍රිය නියන් Tariff Code විදුලි පිහිටැවුම පිළිබඳ විස්තර ක්‍රයා නැති නැත්ව (ලිනැ ලුණ) නිතුකුණන්නම්ම නියාග් (ලිනැ ලුණ) Scheduled of Installation (Contd)	සංඛ්තාව ණෝනේඨනය No.	වෙට්ර පැහොරුගුල Wattage
තේතල / කෙනුන්ගෙන් / Kettles මතකරන යන්තු ඉණියා නුකර වෙරු ඉහස් / Refrigerators ටදි තේදන යන්තු හොම පෝහැඳ කි.ගුන්නි 7 නියක් / Vashing Machines තුර පොමිත / නුක්කා Tú ගඳ යන් / vater Pumps	•		දිගරත් කුරු ඉක්ක් අපාර්තුර කලුණිනේ  Water Heaters මෝවර් බැහැරුගැනුණේ (බැහැරුපත්පත්)  Motors පස්සුම් යන්තු පාර්තුක්වේ යන්තු Welding plants		

Maximum Power Required

වකලා ඇම්. 15/30/ගෙකලා ඇම්. 15/30/60 முதன்கை 15 அம்பி பிருந்தி இருந்து விருந்து பிருந்த 15 அம்பிக் அம்பி Single phase 15A/30A/Three phase 15A/30A/60A

ඉතන සඳහන් ගොඩනැගිල්ලෙහි භාවිතය උදෙසා මණ්ඩලයේ නියමින අය සුමයට වීදුලිබලය සැපයුමක් සදහා අයදුම්කරන අභර ාැපයුමේ කොන්දේසිඵලව එකත යවම්/ වෙමු.

ான் / நார் மேலே குறிப்பிடப்பட்டுள்ள இடத்தில் மின்சாரத்தைப் பாவிப்பதுந்காக மின்சார வழங்களுக்கான விண்ணப்பிக்கின்றேன் / ிண்ணப்பிச்சுக்கிறாம். பொருத்தா டன இறப்பளவுக்கு ஏற்ப மின்வழங்கலைப் பெறும் நான் / நாம், மின்வழங்களுக்கான நிபந்தனைகளுக்கு ட்பத்தின்றேன் / உட்பத்தின்றோம்.

We apply for a supply of electricity for use at the premises mentioned above at the appropriate Board's Tariff, and agree be bound by the conditions of supply.

්මන් ලිපිනය ා	
GUI-ANDU 311-11- }	අයදම්කරුගේ අත්සන් නික්කෝඩුන 77 ශ් කඩම්වල්
esent Address J	Signature of Applicant
ය/ නිය_€/ Date.	515XC/6331-3130/N.I.C.No.

# සැපයුම පිළිබඳ කොන්දේසි மின்வழங்கலுக்கான நிபந்தனைகள் CONDITIONS OF SUPPLY

විදුලිබල පනතේ විදුලිබල මණ්ඩල පනතේ විධිවිධානයන්ව සහ කලින් කලව වල තුව පවන්නා රෙතුරායි සහ නියෝගවලට අනුකුලව විදුලිබලය සපයනු ඇත.

ඉහත සදහන් පනත්වල රෙගුලාසි සහ නියෝගවල අන්තර්ගත කොන්දේසි වලින් සමහරක් පැහැදිලි කිරීමට පහත සදහන් සවහන් වලින් අදහස් කෙරේ. එහෙත් ඒවා සම්පූර්ණමය නොවන අතර පාරිභෝගිකයින්ගේ මග පෙන්වීම සදහා පමණක් වේ.

அவ்வப்பொழுது நடைமுறையிலிருக்கும் மின்சாரச் சட்ட நிபந்தனைகள், மின்சாரச் சபைச் சட்டம் பிரமாணங்கள், கட்டளைகள் ஆசியவற்றிற்க்கு ஏற்ப மின்சாரம் வழங்கப்படும்.

பின்வரும் குறிப்புகள் மேலே குறிப்பிடப்பட்டுள்ள சட்டங்கள், பிரமாணங்கள், கட்டளைகள் ஆகியனவற்றில் தெரிவிக்கப்பட்டுள்ள நிபந்தனைகளில் சிலவற்றை விபரிக்கின்றன. ஆனால் இவை பூரணமானவை அல்ல. பாவனையாளருக்கு வழிகாட்டவே இவை தரப்பட்டுள்ளன.

Electricity will be supplied in accordance with the provisions of the Electricity Act, Electricity Board Act, Regulations and Orders being in force from time to time.

The following notes are intended to explain some of the conditions contained in he above mentioned Act, Regulations and Orders but they are not exhaustive and are intended only for the guidance of consumers.

### 1. CODOS

පාරිභෝගිකයාගේ ගොවතැගිල්ල ඇතුළත පැපසුම ලබාදෙන ස්ථානය නෙක්වූ උපකරණ, එනම් රැහැන් ආධාරකයන් / බහන් / පුළුපු / පැරිසිදු / මනු උපකරණ යනාදිය මණ්ඩලය සතු දේපල වශයෙන් පවතින අතර, මණ්ඩලයේ සේවකයින් හැර, වෙනන් කිසිම අයෙකු විසින් කුමන හේතුවක් නිසා හෝ එම උපකරණ එහා මෙහා කිරීම හෝ ඒවාව අතගැසීම හෝ නොකළ යුතුයි.

#### 1. உபகரணங்கள்

பாவனையாளரின் இருப்பிட வளைவுக்குள் இருக்கும் உபகரணத்திலிருந்து மின்சாரம் வழங்கப்படும் இடம் வரையிலான அதாவது, யின் கம்பி தாங்கிகள்/வடங்கள்/உருக்கிகள் தடுப்புப் பொறியமைப்பு/மானியிடல்/உபகரணம் வரை சபையின் சொத்தாகும். எந்தக் காரணம் கொண்டும் சபையின் ஊழியர்கள் அல்லாத எவரும் அதனை இடமாற்றம் செய்யவோ அல்லது கையாளவோ கூடாது.

#### 1. Apparatus:

The equipment within the consumer's premises upto the point of supply i.e. line supports / cables / fuses / circuit breakers / metering equipment etc. remain the property of the Board and on no account should they be moved or handled by anyone other than the Board's employees.

- (අ) පාරිභෝගිකයා මනු උපකරණ වලව අකගැසීමක් නොකළ යුතු අතර, මණ්ඩලයේ නිලධාරීයෙකු හෝ පේවකයෙකු නොවන කිසිම අයෙකුව එම මනු උපකරණ වලව කුමන අන්දමකින් හෝ අනගැසීමට ඉඩ නොදිය යුතුයි.
- பாவனையாளர் மானியிடல் உபகரணத்தைக் கையாளக்கூடாது. அத்துடன் சபையின் அலுவலகர் அல்லது ஊழியர் அல்லாத எவரும் அதனை கையாளவும் அனுமதிக்கக் கூடாது.
- (a) The consumer shall not interfere or permit any person not being an officer or servant of the Board to interfere in any way with the metering equipment.
- (අා) ඉහත සදහන් උපකරණ තැකිවුවහොක් හෝ ගින්නෙන් හෝ වෙනක් ආකාරයකින් විනාශ වුවහොක් නැතහොක් ඒවාට අලාභ හානි සිදුවුවහොත්, පාරිභෝගිකයා ඒ බව මණ්ඩලයට දනුම් දිය යුතු අතර, එම අලාභභානිය අකුණු වැදීම, ගංවතුර හෝ භාණ්ඩ වල දෝෂ සහිත නිෂ්පාදනය යන කරුණු හේතුවෙන් සිදුවී ඇති අවස්ථාවලදී හැර භානිවු භාණ්ඩ අදුක්වැඩියා කිරීමේ හෝ ප්‍රකිසම්පාදනය කිරීමේ වියදම පාරිභෝගිකයා විසින් මණ්ඩලයට ගෙවිය යුතුයි. නැතහොක් අලාභභානියෙන් සිදුවු පාඩුව වෙනත් අයුරකින් පිරිමැසීමට කටයුතු කළ යුතුයි.
- (ஆ) மின்னல், வெள்ளம் அல்லது உற்பத்தியில் குறைபாடு தவிர்ந்த ஏனைய கட்டங்களில் மேலே குறிப்பிட்ட பொருட்கள் காணாமல் போனால், அல்லது தீயினாலோ அல்லது வேறு ஏதாவது விதத்தினாலோ அழிக்கப்பட்டால் அல்லது பழுதடைந்தால் பாவனையாளர் சபைக்கு உடனடியாக இதனை அறிவித்து, அதனைப் பழுது பார்ப்தற்கு அல்லது மாற்றுவதற்கான செலவுப் பணத்தை செலுத்த வேண்டும். அல்லது இப்பழுதுகளைத் தாமே திருத்திக் கொள்ள வேண்டும்.
- (b) If the above items shall be lost, destroyed or damaged whether by fire or otherwise, the consumer shall inform the Board and shall pay to the Board, the cost of repairing or replacing the same and otherwise make good the damage except in instances where the damage is due to lightning, floods, or defective manufacture.
- (අ) පම්කිසි අවස්ථාවකදී මනුවක පරිභෝජනය නිවැරදිව සවහන් නොවේ නම් හෝ පටහන් හැනීම සඳහා මණ්ඩලයේ නියෝජිතයාට මනුව වෙන යැමට නොහැකිවේ නම්, අදල කාලය තුළ විදුලිබල පරිභෝජනය ඊට කලින් හෝ පසු කාලයේ සවහන් වී ඇති පුමාණය අනුසාරයෙන් හෝ නිෂ්පාදනය මත හෝ නිසි අසුරින් කියා කරන මනුවල කියැවුම් යොද ගැනීම වැනි වෙනත් සුදුසු ආකාරයකින් හෝ නක්සේරු කරනු ඇත.
- இ) எந்தெவாகு சந்தாப்பத்திலாவது மானி சரியாக பதிவுகளை மேற்கொள்ளாவிடில் அல்லது சபையின் பிரதிநிதியால் மானி பதிலுகளை மேற்கொள்ள மானி நிறுவப்பட்டுள்ள இடத்தை நெகுங்க முடியாவீடில் அக்காலப் பகுதிக்கான மின் பாவனை மதிப்பீடு செய்யப்படும். இம்மதிப்பீடு கடந்தகாலப் பதிவுகளையோ அல்லது அதற்கடுத்த பதிவுகளையோ அல்லது தற்சமயம் உள்ள மானி பதிவு ஆகியனவற்றிற்க்கு ஏற்பலோ மேற்கொள்ளப்படும்.
- (c) If at any time a Meter fails to register correctly or the Board's representative cannot gain access for recording the registration, the amount of electricity consumed during the period concerned will be estimated by reference to previous or subsequent registrations or by other suitable means such as production, readings of meters that are in working order etc.

#### 2. පාරිභෝගිකයාගේ පිහිවැවුම :

මණ්ඩලය සතු පුධාන පුලුසුවේ හෝ මනුවේ පිට පාරිභෝගිකයාගේ පැත්තේ ඇති කිසියම් තත් බහන් හෝ උපකරණ නඩත්තු කිරීමේ වගකීම මණ්ඩලය විසින් භාරගනු නොලැබේ.

#### 2. பாவனையாளரின் நிறுவுதல்கள் 🔹

சபையின் பிரதான உருசி அல்லது மானியில், பாலனையாளரின் பொறுப்பிலுள்ள மின்சும்பி, லடம் அல்லது உபசுரணம் ஆசியவற்றின் பராமரிப்புக்கு சபை பொறுப்பாளியல்ல.

#### 2. Consumer's Installation:

The Board is not reponsible for the maintenance of any wire, cable or apparatus on the consumer's side of the Board's main fuse or meters.

#### 3. සේවා රැහැත් මාර්ග සහ කනු :

සැපසුම ලබාදීම පිණිස අවශා යම් කිසි රාතුන් මාර්ග හෝ උපකරණ සදහා යන වියදම් වෙනුවෙන් මුදල් යෙදවීම මණ්ඩලය පාරිභෝගිකයාට තියම් කරනු ඇත. එහෙන් එම රාතුන් මාර්ග යන උපකරණ මණ්ඩලය සතු දේපල වශයෙන් පවතින අතර, වෙනත් පාරිභෝගිකයන්ට සැපසුම් ලබාදීම සදහා එම රාතුන් මාර්ග යන උපකරණ යොද ගැනීමේ අයිතිය මණ්ඩලය සතුවේ. මනුව හෝ කණුව පිහිටුවිය යුතු ස්ථානය යන ඒවායේ බහන් ඇතුලත් කළ යුත්තේ කොතැන්හිද යන්න පිළිබඳව මණ්ඩලය ගනු ලබන තීරණය අවසාන තීරණය වේ. තම හොඩනැගිල්ලට සේවා රාතුන් මාර්ග දමීම සහ මණ්ඩලයේ උපකරණ ස්ථාපනය කිරීම සදහා පාරිභෝගිකයා මණ්ඩලයට පහසුකම් සැලසිය යුතුයි.

#### 3. சேவைக் கம்பிகளும் கம்பங்களும்

மின் விநியோகம் பெறுவதற்கான மின்கம்பி, அல்லது உபகரணம் சம்பந்தமான செலலுகளை மின் பாவனையாளரே பொறுப்பேற்க வேண்டும். ஆனால் இவை சபையின் சொத்தாக இருப்பதோடு, மற்றப்பாவனையாளர்களுக்கு மின்சாரம் வழங்க இவைகளை உபயோசிக்கும் உரிமையை இது சபைக்கு வழங்குகின்றது. மானியை எங்கே வைப்பது, கம்பங்களை எங்கே நாட்டுவது. வடங்களை எங்கே பொருத்துவது போன்றவை விஷயங்களில் சபையின் முடிவே இறுதியானது. இருப்பீடத்திற்கு சேவைக் கம்பிகளைப் பொருத்துவது. சபையின் உபகரணங்களை நிறுவுவது போன்ற விடயங்களில் பாவனையாளர் சகல வசதிகளையும் செய்து கொடுக்க வேண்டும்.

#### 3. Service Lines and Posts :

The Board will require the consumer to contribute towards the cost of any line or equipment required to provide the supply.

But these will remain the property of the Board and the Board reserves the right to use them for supplying other consumers.

The Board's decision as to the position of the meter or the post and where their cables enter will be final. The consumer shall provide the facilities to the Board for the laying of service lines to the premises and for the installation of the Board's apparatus.

#### 4. පිහිටැවම පිරික්සීම :

පැපයුම පථිවාත්ට කිරීමට පෙර වියලුවීදුලි පිහිටැවුම පෝදිසි කර පරිකෘ කරනු ඇත. පාරිභෝගිකභාගේ විදුලි පිහිටැවුම යහපත් අපුරිත් හා තත්ත්වයෙන් තවත්ත බවට සහ එයින් අනෙකුත් පාරිභෝගිකයින්ගේ සැපයුම් වලට කිසිදු අයුරකින් බාද සිදුවීමට ඉඩ තොමැති බවට මණ්ඩලය සැඹීමට පත්වන කුරු සැපයුම සම්බන්ධ නොකරනු ඇත. සිය විදුලි පිහිටැවුමේ යම්කිසි අන්දමක දිගු කිරීමක් හෝ වෙනස් කිරීමක් සිදු කිරීමට පාරිභෝගිකයා යෝජනා කරන්නේ නම් එම දිගු කිරීම හෝ වෙනස් කිරීම පිළිබඳව යෝදිසි කිරීමක් හෝ පරිකෘත කර බැලීමක් කිරීමට මණ්ඩලයට හැකිවන පරිදි පාරිභෝගිකයා ඒ බව මණ්ඩලයට දන්විය යුකුයි.

විදුලි පිහිටැවුමක් හෝ එහි යමිකිසි දිගු කිරීමක් හෝ වෙනස් කිරීමක් පුළුම වරට සොදිසි කර බැලීම සහ පිරීක්සීම සඳහා පාරිභෝගිකයාගෙන් ගාස්තුවක් අය නොකෙරේ, යම්කිසි සෝදිසි කිරීමක් හෝ පිරීක්සීමක පුනිඵල අපතුවුදයක වුවහොත්, තවදුරටත් සෝදිසි කිරීමක් හෝ පිරීක්සීමක් අවශා වන අතර, ඒ සඳහා (කලින් ගෙවිස යුතු) ගාස්තුවක් අය කරනු ඇත.

අවශානාවයන් සපුරාලන අයුරින් විදුලි පිහිවැවුම සිදුකර ඇති බවට වරලක් විදුලි ඉංජිනේරු වරයෙකු විසින් නිකුත් කරන ලද සහනිකයක් පිළිගැනීමට මණ්ඩලයට හැකිවේ.

විදුලි පිහිටැටුම් අනුමන කිරීම එම විදුලි පිහිටැටුම පාරිභෝගිකයාගේ කායයියන් සඳහා සුදුසු බවට සහතිකයක් තොවන අතර, පාරිභෝගිකයාගේ විදුලි පිහිටැටුමේ ඇති කිසියම් දෝෂයක් හේතුවෙන් ඇතිවන හෝ පැත නහින යම්කිසි පාඩුවක් හෝ අලාභහානියක් ශාන මණ්ඩලය වග නිම හාර නොගනී.

#### 4. நிறுவுதல்களைப் பரீட்சித்தல்

மீன் விதியோகம் வழங்கப்படு முன்னர் எல்லா நிறுவுதல்களும் பரிசோதனைக்கு உட்படுத்தப்பட்டு. பூரணமாக பரீட்சிக்கப்படும், பாவனையாளரின் நிறுவுதல்கள் தல்ல நிலையில் இருக்கின்றதா என்பதையும், அது ஏனைய பாவனையாளர்களின் விதியோகங்களோடு குறுக்கிடாது என்பதும் உறுதி செய்யப்படும்வரை விதியோகம் வழங்க்கபடாது நிறுவுதல்களின் உத்தேசித்த விஸ்தரிப்பு அல்லது மாற்றம் பற்றிச் சபைக்கு அறிவிக்க வேண்டும். ஆகவே சபை விஸ்தரிப்பு அல்லது மாற்றம் பற்றிப் பரிசோனதன அல்லது பரீட்சையொன்றை மேற்கொள்ளக் கூடியதாயிருக்கும். நிறுவுதல் பற்றிய முதலாவது பரிசோதனையும், பரீட்சையும் பாவனையாளரிடம் பணம் எதுவும் அறவிடாமல் மேற்கொள்ளப்படும். பரிசோதனை அல்லது பரீட்சை முடிவு திருப்திகரமாக அமையாவிட்டால், மற்றுமொரு பரிசோதனையும், பரீட்சையும் மேற்கொள்ளப்படும். இதற்குக் கட்டணெமான்று இத்தொகை முன்பணமாக (செலுத்தப்படல் வேண்டும்) அறவிடப்படும்.

நிறூலு தஸ்கள் தேவையான தகைமைகளுக்கு ஏற்ப அமைந்துள்ளது என பட்டய மின்சாரப் பொறியியலாளர் ஒருவர் சான்றிதழ் ஒன்று வழங்சினால் சபை அதனை ஏற்றுக்கொள்ளும்.

நிறுவு தலொன்றை அங்கீகரிப்பதில் இந்நிறுவு தல்கள் பாவனையாளரின் தேவைகளுக்கு ஏற்றது என சபை உத்தரவாதம் அளிப்பதாக கருத்தில் கொள்ளலாகாது. பாவனையாளரின் நிறுவுதல்களில் உள்ள கோளாறுகள் காரணமாக ஏற்படும் நட்டங்களுக்குகோ அல்லது சேதங்களுக்கோ சபை பொறுப்பாகாது.

#### 4. Testing of Installation:

The first inspection and test of an installation or any extension or alteration thereof is made without charge to the consumer. If the results of any inspection or test are unsatisfactory, a further inspection and test will be necessary for which a charge (to be paid in advance) will be made. The Board may accept a certificate issued by a Chartered Electrical Engineer who certifies the installation satisfies the requirements.

All installations shall be inspected and tested before the supply is connected. No supply will be connected until the Board has satisfied itself that the consumer's installation is in good order and condition and not likely to interfere with supplies to other consumers. The consumers should inform the Board of any proposed extension or alteration of his installation so that the Board may make an inspection or test of the extension or alteration.

Approval of an installation does not imply any warranty that the installation is suitable for the consumer's purpose and the Board accepts no responsibility for any loss or damage caused by or arising out of any defect in the consumer's installation.

#### පාට්භෝගියාගේ ගොඩැගිල්ලට පිවිසීම :

යුතු පෑම වේලාවකම සැපසුම හා සම්බන්ධ කාර්යයන් සඳහා මණ්ඩලයේ බලසලත් නිලධාරීන්ව ගොඩනැගිල්ලව ඇතුළුවීමට හිමිකම් ඇත.

# பாவனையாளரினது இடத்திற்குள் நுழைஷ்

அங்கீகாரம் பெற்ற சபை ஊழியர் விறியோகம் தொடர்பான அலுவல்களுக்குப் பொருத்தமான நேரங்களில் பாலனையாளர் இடத்திற்குள் நுழைய உரித்துடையவராவர்.

#### Access to Consumer's Premises:

Authorised officers of the Board are entitled at all reasonable times to enter the premises for purposes connected with the supply.

#### වදුලිබලය පරිභෝජනය වෙනුවෙන් සැන්පත් මුදල් :

විදුලිබලය සැපයිමේ භාජකුව ආවරණය කිරීමු\*පිණිස නැත්පත් මුදලක් ගෙවන ලෙස මණ්ඩලය, විසින් පාරිභෝගිකයින්ට නියම කරනු ඇත. යමිකිසි අතිරේක නැත්පත් මුදලක් ලබාගැනීම අවශා යැයි සලකනු ලබන විට, එසේ අතිරේක නැත්පත් මුදලක් කැදවීමේ අයිතියද මත්වලය සතුව පවති, එබදු නැත්පත් මුදලක් දෙනු නොලැබුවහොත් සැපයුම් නතර කිරීමට හෝ අත්හිටුවීමට මණ්ඩලයට හැකිවේ. එබදු නැත්පත් මුදලක් සසුරා නිලිණද, ඉල්ලා සිටි වීව සැපයුම සඳහා ගෙවීම් කළ යුතුය.

#### மின் பாவனைக்கான வைப்புப் பணம்

மின்சார விறியோகச் செலவுகளின் நிமித்தம் வைப்புப் பணமாக தொகையொன்றைச் செலுத்தும்படி சபை மின் பாவளையாளாரைத் கொரும் சபையின் கட்டளைப்படி தேவையான பொழுது மேலதிக வைப்புப் பணத்தைக் கொரும் உத்தரவு சபைக்கு உண்டு. இப்படியான வைப்புப் பணம் செலுத்தப்படவில்லையாயின், சபை விறியோகத்தை இடைநிறுத்தம் செய்யவோ அல்லது நிறுத்தவோ முடியும். வைப்புப் பணம் செலுத்தப்பட்டிருந்தும் விநியோகத்திற்காக மேலதிகக் கட்டணம் கோரப்படும் பொழுது செலுத்தப்படல் வேண்டும்.

#### Deposit against Electricity Consumption:

The Board will require the consumers to furnish a deposit to cover the cost of electricity supplied. The Board also reserves the right to call for any additional deposits as and when deemed necessary by the Board. If such deposit is not given, the Board may withhold or suspend the supply. Notwithstanding any such deposit, payments for supply are due on demand.

#### අතිකුත් පාරිභෝගිකයින්ගේ සැපයුම්වලට මාධා ඇතිවීම :

වෙන්න් කිසියම් පාරිතෝහිකයෙකුව කායර්ක්ෂම ලෙස විදුලිබලය පැපසීමට බාධාවන අපුරු අනිසි හෝ අයෝගෘ අන්දමින් යම්කිසි පාරිතෝහිකයකු විසින් විදුලිබලය භාවිතා කෙරේ නම් හෝ කවයුතු කෙරේ නම්, තැනහොත් වෙනත් පාරිතෝහිකයින්ව පැපයෙන විදුලිබලය භාවිතයට භාතිකර අන්දමින් බලපෑමට ඉඩ ඇති හෝ අනිකුත් පාරිභෝගිකයින්ව අනතුරක් විය හැකි පුමාණයේ විදුලිබලය කාන්දුවීමක් යම් පාරිභෝගිකයෙකුගේ නොවනැගීල්ලෙහි පවතින බව විශ්වාය කිරීමට මණ්ඩලයට කිසියම් අවස්තාවක හේතු කිබේ නම් පුශ්තත ගොඩනැගිල්ලේ විදුලිබලය පැපයුම වහාම සිඳලීමට මණ්ඩලයට හැකිවේ. එවැනි අවස්ථාවකදී අවහිරවීමේ හෝ විදුලිබලය කාන්දුවීමේ හේතුව ඉවත් කරන තුරු නැවන විදුලිබලය සපයනු නොලැබේ. එවැනි කවර හෝ අවස්ථාවකදී සැපසුම නැවත ලබාදීමට නම්, විදුලි පිහිටැවුම පිරික්සුම සහ යළි ඇමිණුම සඳහා ගාස්තුවක් කලින් ගෙවිය යුතුය.

# ஏனைய பாவனையாளரது விநியோகத்தில் இடையுறு ஏற்படுத்தல்

பாவனையாளரொருவர் முறையற்ற. தவறான வழியில் மற்றொரு பாவனையாளரது ஒழுங்கான விறியோகத்திற்கு குந்தசம் ஏற்படுத்தும் வகையில் மின்சாரத்தைப் பயன்படுத்தினால் அல்லது பாவனையாளரின் இருப்பிடத்தில் இருக்கும் ஒழுக்கு பிறபாவனையாளரின் விறியோகத்திற்கு பாதசம் விளைவிக்குமெனச் சபை நம்பினால் அல்லது அது ஆபத்தை விளைவிக்குமெனக் கருதினால். அவிடத்திற்கு வழங்கப்படும் மின் விறியோகத்தை உடனடியாசத் துண்டித்து ஒழுக்கு நிவர்த்தியாக்கப்படும் வரை விறியோகத்தை வழங்காமலிருக்க சபை உரிய நடவடிக்கைகளை எடுக்கும். இப்படியான சந்தர்ப்பங்களில் ஒழுக்கு நிவர்த்தி செய்யப்பட்டதும், மீண்டும் மின் விறியோகத்தை வழங்கப் பரீட்சையொன்று மேற்கொள்ளப்படும். இதற்கான சுட்டணத் தொகை முன்பணமாக அறவிடப்படும்.

#### Interference with supply to other consumers:

In the case of electrical energy being used or dealt with by any consumer in such a manner as unduly or improperly to interfere with the efficient supply of energy to any other consumer, or if at any time the Board has reason to believe that a leakage exists in the premises of a consumer likely to effect injuriously the use of energy supplied to other consumers or of such an extent as to be a source of danger, the Board may forthwith disconnect the supply of energy to the premises in question and will not reconnect it until the cause of interference or leakage has been removed. In any such case, if the installation is to be reconnected thereafter a fee for testing and reconnecting will be payable in advance.

# තාවකාලිකව ව්දුලිබලය අත්ගිටුවීම :

මණ්ඩලයේ විදුලිබලය බෙද හැරීමේ පද්ධතියේ නිසි නුියාකාරීක්වයට සම්බන්ධ පරීක්ෂා කිරීමක් හෝ වෙනන් කිනම් අන්දමක කායගීයන් සඳහා විදුලිබලය සැපයුම තාවකාලිකව නතර කිරීමට මණ්ඩලයට හැකිවේ.

පාරිභෝගිකයින්ව සායඛීක්ෂම හා අඛණ්ඩ විදුලිබලය සැපසුමක් ලබාදීම සඳහා මණ්ඩලය සැම පුයන්නයක්ම දරණු ඇත. එහෙත් කිසිම ආකාරයක ආණ්ඩිම්මකට මණ්ඩලය වගකීම හාර නොගන්නා අතර, සැපසුම මුළුමනින්ම හෝ අර්ධ වශයෙන් හෝ ඇණ්ඩිම්ම ගැන හෝ නැතහොත් සැපසුමේ වෙනස්වීමක් හේතුවෙන් නියම වශයෙන් හෝ අනිසම් වශයෙන් සිදුවන කිසියම් පාඩුවක් හෝ අලාගනානියක් ගැන මන්ඩලය පාරිභෝගිකයාව වගකීමක් හාර නොගනී.

# தற்காலிகத் தடை

பரீட்சைத் தேவைகளுக்காகலும், சபையீன் விதியோகத் திட்டத்தை சிறப்பாக மேற்கொள்வதற்காகலும், அல்லது வேறு ஏதாவது காரணங்களுக்காகலும் சபை விநியோகத் துண்டிப்பை மேற்கொள்ளலாம்.

சபை தன்னால் இயலக்கூடிய அளவுக்குச் சிறப்பான தொடர்ச்சியான மின்சார விறியோகத்தை பாவனையாளருக்கு வழங்க சகல முயற்சிகளையும் மேற்கொள்ளும். ஆனால் விறியோகத்தில் ஏற்படக்கூடிய தடைகளுக்கு சபை பொறுப்பாகாது. அதே போல முழுமையாகவோ அல்லது ஒரளவிலோ ஏற்படக்கூடிய மின் விறியோகத் தடைகளினால் பாவனையாளருக்கு தேரிடையாகவோ அல்லது மறைமுகமாகவோ ஏற்படும் இழப்பீற்கு அல்லது பாதிப்பீற்குச் சபை பொறுப்பாகாது.

### Temporary Interruption:

The Board may temporarily discontinue the supply for purposes of testing or for any other purpose whatsoever connected with the proper working of the Board's Electricity Distribution System.

The Boart will take every means and precaution to ensure an efficient and continuous supply of energy to consumers but the Board will not be responsible for any interruptions nor shall the Board be held liable to the consumer for any loss or damage occasioned directly or indirectly by the total or partial interruption of supply or variation in the supply.

9. එක් අයකිරීමේ කුමයක් යටතේ සපයනු ලබන බලශක්තිය භාවිතය :

එක් අයතිරීමේ නුමයක් යටතේ නමාව ලබාදී ඇති විදුලි බලය වැඩි අය කිරීමේ නුමයක් නියාත්මකව පවත්තා කවර හෝ කා\$යක් සඳහා පාරිභෝගිකයා විසින් භාවිතා නොකල යුතුයි.

ක්සියම් පාරිභෝගිකයෙකු තම විදුලිබලය භාවිතය වැඩි අය නුමයකට යටත්වන පරිද්දෙන් වෙනස් කළේ තම් මණ්ඩලය විසින් තීරණය කරනු ලබන පරිදි එබදු වැඩි අය නුමයට යටත්විය යුතු දිනයේ සිට වැඩි අය නුමය යටතේ විදුලි ගාස්තු ගෙවීමට එම පාරිභෝගිකයා බැදී සිටිනු ඇත.

9. ஒரு குறிப்பிட்ட கட்டணத்தின் கீழ் வழங்கப்படும் மின்சாரப் பாவனை

ஒரு குறிப்பிட்ட கட்டணத்தின் கீழ் தமக்கு விநியோசிக்கப்பட்ட மின்வலுவை பாவனையாளர் அமுலிலிருக்கும் கூடிய கட்டணத்திற்குரிய விதத்தில் பூருவிக்கலாகாது.

பாவனையாளரொருவர் தனது பாவிப்பு முறையை கூடிய கட்டண விசிதத்தில் அறவிடப்படக்கூடிய முறைக்கு மாற்றுவாரேயானால் நிர்ணயிக்கப்பட்டபடி பின்னைய இறுப்பனவைப் பாவிக்க ஆரம்பித்த நாளிலிருந்து. பின்னர் இறுப்பனவிற்கான கட்டணத்தைச் செலுத்த வேண்டியவராவார்.

9. Use of Energy Supplied under one method of Charging :

The consumer shall not use the energy supplied to him under one method of charging for any other purpose for which a higher method of charging is in force.

If a consumer alters his energy usage in such a way as to become liable for a higher tariff, he will be required to pay on the latter tariff from the date he becomes liable to pay such tariff as determined by the Board.

#### 10. ගිණුම ගෙවීම :

සපයනු ලබන විදුලිබලය පදහා ගාස්තු පිළිබඳ අයපතක් පාරිකෝගිකයාගේ ලිපිනයට නැපැලෙන් යැවූ විට සාමානෳ අන්දමට නැපැලෙන් එය යවනු ලැබුවිට ලැබෙන්නට ඇති දිනට පසු දින එම ලිපිනයට ලැබුනායේ සලකනු ඇත.

ගිණුම් ඉදිරිපත් කළ විට ගෙවීම කළයුතුවේ. ගිණුම් ඉදිරිපත් කරනු ලැබ දින හතක් ඇතුලතදි ගෙවීම් තොකළහොත් පාරිභෝගිකයාව දින හතකට කලින් දනුම්දෙනු ලැබීමෙන් පසුව, වැඩිදුර කිසිම දනුම්දීමකින් හොරව හා හිග මුදල් පියල්ලක්ම අයකර ගැනීමට මණ්ඩලයට ඇති අයිතියට කිසිදු භාතියක් නොවන පරිද්දෙන් සැපයුම පිදලීමට මණ්ඩලයට හැක. පාරිභෝගිකයෙකුගේ ගිණුම වෙනුවෙන් ඇපයක් වශයෙන් පාරිභෝගිකයාගෙන් කැත්පත් මුදලක් මණ්ඩලය යතුව කිබීම එම පාරිභෝගිකයාගේ සැපයුම සිදලීමට මණ්ඩලයට ඇති මෙම අයිතිය කෙරෙහි බල නොපානු ඇත.

හිණුම්වල යම් සාවදාතාවයක් ඇතිවුවහොත් ඒ පිළිබඳ පැමිණිලි හිණුම් නිකුත් කරනු ලැබු දින සිට සතියක් ඇතුලතදී මණ්ඩලිය කාර්යාලයට ඉදිරිපත් කළ යුතුය. ගිණුමේ ඇතුලත් ගනනක නිරවදාතාවය පිළිබඳව කිසියම් මගහේදයක් වී නම් පාරිභෝගිකයා විසින් (ඔහු වෙත) හිණුම භාරදෙනු ලැබු දින සිට හතක් ඇතුලතදී හිණුමෙහි මතහේදයක් නොමැති කොටයේ මුදලට සමාන මුදලක් හා එවැනි මතහේදයට භාජනයට් පවත්නා කොටයේ මුදලත් තියයට 75 ක මුදලක් ද සමග මණ්ඩලයට ගෙවිය යුතුවේ. එම මතහේදයට තුඩුදුන් කොටය පිළිබඳ මුදල නිශ්වය කරනු ලැබීමෙන් පසු වැඩිසුර මුදලක් අයකරනු ලැබී නිබුණහොත්, මණ්ඩලය විසින් ඒ මුදල පාරිභෝගිකයාට වභාම ආපසු ගෙවන අතර, අවුවෙන් මුදලක් යෙකරනු ලැබී නිබුණහොත් පාරිභෝගිකයා විසින් එම අඩුවෙන් අයකරණ ලද මුදල මණ්ඩලයට වභාම ගෙවිය යුතුය.

# 10. கணக்குக்குப் பணம் செலுத்தல்

விநியோசிக்கப்பட்ட மின்சாரத்திற்குரிய கட்டணப்பட்டியல் பாவனையாளரது முகவரிக்குத் தபாலில் அனுப்பப்படும் பொழுது சாதாரணமாக அது தபால் முறைப்படி அடுத்த நாள் அந்த முகவரிக்குக் கிடைத்ததாகக் கருத்தில் கொள்ளப்படும்.

கணக்குப் பட்டியலுக்கு ஏற்ப பணம் செலுத்தப்பட வேண்டும். அத்தகைக்ய கணக்குச் சமர்ப்பிக்கப்பட்ட ஏழு நாட்களுக்குள் உரிய கட்டணம் செலுத்தப்படாவிட்டால், பாவனையாளருக்குச் சபை ஏழு நாள் முன்னறிவித்தல் கொடுத்து அதன்பின் எவ்வித அறிவித்தலுமின்றியும், பாக்கிகளை மீட்டுக்கொள்ளும் உரிமைக்குப் பங்கமின்றியும் விறியோகத்தைத் துண்டிக்கலாம். சபையிடம் பாவனையாளரின் பிணைப்பணமான வைப்புத் தொகை இருப்பதால், பாவனையாளரது மின்னிணைப்பைத் துண்டிப்பதற்குரிய உரிமையை இது பாதிக்காது.

கணக்குப் பட்டியல்கள் அனுப்பப்பட்ட ஒருவார காலத்திற்குள் கணக்குகளின் சரி பிழை பற்றிய குறை சபைமின் அலுவலகத்தில் கிடைக்கப்பெறுமாறு அனுப்பப்படல் வேண்டும். கணக்கில் ஏதேனும் ஒரு பகுதியைப் பற்றிய செம்மைமில் கருத்து வேறுபாடு ஏற்படின், கணக்கு அனுப்பப்பட்ட திகதியிலிருந்து ஏழு நாட்களுக்குள் பாவனையாளர் சரியெனக் கருதப்படும் பகுதித் தொகையோடு, பிழையெனக் கருதப்படுகின்ற பகுதியின் 75 சதவிகிதத் தொகையையும் செலுத்த வேண்டும். கருத்து வேறுபாட்டுக்குரிய தொகையின் சரி, பிழை சீராக்கப்பட்ட பின், பாவனையாளர் பாக்கிப் பணம் செலுத்த வேண்டுமாயின் அவர் அவ்வாறு அத்தொகையைச் செலுத்த வேண்டும் அல்லது சபை பாவனையாளருக்குச் செலுத்த வேண்டுமாயின், சபை அத்தொகையைப் பாவனையாளருக்கு மீண்டும் செலுத்தும்.

#### 10. Payment of Account :

A bill of charges for energy supplied shall, when sent by post to the address of the consumer, be deemed to have been received at that address on the day succeeding that on which it would have been received in the ordinary course by post.

Payments are due on presentation of accounts. If such accounts are not paid within seven days of rendering, the Board may after giving seven days notice to consumer, disconnect such consumer without further notice, and without prejudice to its rights to recover all arrears. This right to disconnect consumer shall not be affected by the Board holding a deposit from the consumer as security against such consumer's account.

Complaints regarding accuracy of account must be made to the office of the Board within week from the date of issue. If the accuracy of any item in the amount is disputed, the consumer shall, within seven days from the date on which the account was delivered, pay to the Board a sum on account, equal to the undisputed portion of the account together with 75% of the amount of any such disputed item. The Board shall repay, or the consumer shall pay any sum found to be due from either of them in respect of any item which has been disputed forthwith after such sum has been determined.

#### 11. සැපයුම සිදලීම :

සැපසුම සඳහා ගෙවිය යුතු මුදල. අයපත් මගින් ඉල්ලා යවනු ලැබු විට සම්පූර්ණයෙන්ම නොගෙවුව හොත් හෝ මෙහි සදහන් සැපසුම පිළිබද කොන්දේසි වලින් කිසිවක් හෝ උල්ලංඝනය කරනු ලැබුව හොත් පෙර සඳහන් සැපසුම සිදලීමට මණ්ඩලයට අයිතිය නිබේ. පාරිභෝගිකයා, නිවාස හිමියා හෝ වෙනත් අයෙකු වුවද මෙය අදල වේ. සැපසුම සිදලීමට කවයුතු යෙදීමේ සහ සැපසුම නැවිත ලබා දෙනු ලබන්නේ නම් එසේ කිරීමට කටයුතු යෙදීම සඳහා වැය වන සියලුම වියදම් පාරිභෝගිකයා විසින් දරිය යුතුය.

සේවා ඇමුණුම් සදහා විසදම් (හෝ එහි කොටසක්) පියවා ගැනීම පිණිස මහජන බැංකුවෙන් ණය මුදලක් ලබා ගෙන ඇති යම් කිසි නිවාස හිමියකු හෝ සම හිමියකු ඒ වෙනුවෙන් මහජන බැංකුවට ලැබිය යුතු වාරික මුදල් නොගෙවීම වෙනුවෙන් ද සැපයීම සිදලීමට මණ්ඩලයට හැකි වේ. මෙය පාරිභෝගිකයා හෝ නිවාස හිමියා, වෙනත් අයෙකු වුවද අදල් වේ. එසේ ගෙවීම නොකිරීම සම්බන්ධයෙන් ' සිදලීම් කිරීමට බැංකුව විසින් මණ්ඩලයට දනුම්දීම සැහෙන හේතුවක් වෙනවා ඇත. මෙවැනි අවස්ථාවන්හිදී නැවන සැපයුම් ලබාදීම කරනු ලබන්නේ යල් දනුම්දීමකින් පසුව හා එම පාරිභෝගිකයා විසින් නැවන සැපයීම ලබාදීමේ භාජතු ගෙවීමෙන් පසුව පමණි.

#### 11. விறியோகத் துண்டிப்பு

மின் விறியோகத்திற்கான தொகையைச் செலுத்துமாறு கேட்கும் பட்சத்தில் அதனை முழுமையாக செலுத்தத் தலறினால் அவ்விடத்திற்கான மின் விறியோகத்தை துண்டிக்கும் உரிமை சபைக்குண்டு குறிப்பிட்ட இடத்தில் உரிமையாளர் வசிக்கின்றாரோ அல்லது வேறு மின் பாவனையாளர் வசிக்கின்றாரோ என்ற வேறுபாடின்றி அவ்விடத்திற்கு மின்சாரம் வழங்கப்பட்ட நிபந்தனைகள் எதுவேனும் மீறப்பட்டிருப்பின் அப்படியான மின் விறியோகத்தை துண்டிக்கும் அதிகாரமும் சபைக்குண்டு. இவ்வாறு மின்சாரம் துண்டிக்கப்பட்டமை, மீண்டும் வழங்கப்பட்டமை ஆசியனவற்றுக்கான அனைத்து செலவுகளையும் மின்பாவனையாளரே ஏற்றுக்கொள்ள வேண்டும். தனது இருப்பிடத்திற்கு மின் விறியோகம் பெறுவதற்காக மக்கள் வங்கிமிடமிருந்து கடனாகப் பெறப்பட்ட முழுத்தொகையை அல்லது ஒரு பகுதியை உரிய காலத்தில் தவணைப் பணமாக வங்கிக்கு செலுத்த உரிமையாளரே வல்லது சபை உரிமையாளரோ தவறுமிடத்து. அவ்விடத்தில் அச்சமயத்தில் இடத்தின் சொந்தக்காரர் வசிக்கின்றாரோ அல்லது வேறு எந்த மின் பாவனையாளர் வசிக்கின்றாரோ என்ற வேறு பாடின்றி மின் விறியோகத்தை துண்டிக்கும் உரிமை சபைக்குன்றி. வங்கி இதுபற்றிச் சபைக்கு ஆறிவிக்குமிடத்தில் இவ்வறிவிப்பொன்றே அவ்விடத்திற்கான மின் விறியோகத்தை தண்டிக்கும் விறியோகத்தை தண்டிக்கும் போதுமானது. இப்படியான சந்தாப்பங்களில் மீண்டும் மின் வழங்குவதற்கான போதிய அறிவித்தல் கிடைக்கப்பெற்ற பின்னரே மின் விறியோகம் மீண்டும் வழங்கப்படும். அதுவும் இதற்கான செலவுகள் அனைத்தையும் தானே பொறுப்பேற்பதாக மின் பரவனையாளர் உத்தரவாதமளிக்க வேண்டும்.

### 11. Disconnection of supply

"The Board is entitled to disconnect the supply for non-payment in full on demand of the sum payable for the supply, and also for breach of any of the Conditions of supply to the premises herein mentioned, whether such premises is occupied by the owner or any other consumer All costs incolved in the processing for disconnection and reconnection will be borne by the Consumer.

The Board may also disconnect the supply for non-payment of any instalment due to the People's Bank by the owner / coowner who has obtained a loan from the People's Bank, for the purpose of meeting the cost of (a portion of the cost of) sevice connection to the premises, not-with-standing such premises is occupied by himself or by any other consumer. An intimation by the Bank to the Board of such non-payment shall be a sufficient reason for the Board to effect such disconnection. In such cases a reconnection shall be effected only on subsequent receipt of notice and provided the cost of re-connection is paid by such consumer to the Board."

# 12. වදලිය පිහිටැවුම දීර්ක කිරීම.

සැපසුම ලබා ගැනීමෙන් පසු කිසියම් අවස්ථාවක වැඩි බල පුමාණයක පහත්, පංකා මෝචර් හෝ වෙනත් කිසියම් උපකරණ භාවිතා කිරීමට තැනහොත් අමතර පහත් හෝ බලය පරිභෝජනය වන වෙනත් කිසියම් උපකරණ නාවකාලිකව හෝ නිතා වශයෙන් සටි කිරීමට තැනහොත් තමාගේ යොවතැගිල්ලෙහි නසැදීම් වෙනස් කිරීමට හෝ දීර්ඝ කිරීමට හෝ පාරිභෝගිකයා අදහස් කරන්නේ නම්, එබදු වෙනස් කිරීම හෝ දීර්ඝ කිරීමේ වැඩ ආරම්භ කිරීමට යටත් පිරියෙයින් දින නතකවවක් පෙර ඒ බව මණ්ඩලය වෙන ලිබිනට දනුම් දිය යුතුයි. එබදු දීර්ශ කිරීමක් හෝ වෙනස් කිරීමක් පිලිබඳ දැනුම්දීමක් කිරීමට පාරිභෝගිකයා අසමත්වීම වැඩිදුර දැනුම්දීමකින් තොරව ඔහුගේ ගොඩතැගිල්ලේ වීදලිය සැපසුම කපා හැරීමට හේකුවේ.

වෙනත් කිසියම් අතිරෙක හෝ වැඩි බලය ඇති උපකරණ හෝ විදුලි පිහිටැවුමේ වෙනස් කිරීමක් හෝ දීර්ඝ කිරීමක් පිහිවැවුමට පම්බන්ධ කිරීමට පෙර මණ්ඩලය විසින් එය යොදිසි කර පරිකෘං කරනවා ඇත.

# 13. நிறுவுதல் விஸ்தரிப்பு

பாவணையாளர் விதியோகத்தைப் பெற்ற பின்னர் எப்பொழுதாவது விளக்குகள். விசிறிகள் அல்லது பெரிய அளவிலான மொட்டார்கள் (லிசைப் பொறிகள்) அல்லது தற்காலிக அல்லது நிரந்தரமாகவோ உயர் சக்தி கொண்ட ஏதேனும் உபகரணம் அல்லது மேலதிக விளக்குகள் அல்லது மின்சாரத்தைப் பெருமளலில் உபயோசிக்கும் உபகரணங்களை நிறுவ விரும்பினால் அல்லது எந்தலிதத்திலாவது தமது இருப்பிடத்திற்கான சும்பியிடுதல்களை மாற்ற அல்லது அவைகளை விஸ்தரிக்க விரும்பினால் வேலையை ஆரம்பிப்பதற்கு குறைந்தது ஏமு நாட்களுக்கு முன் நிறுவுதலின் விஸ்தரிப்பு அல்லது மாற்றல் பற்றி அவர் சபைக்கு எழுத்து மூலம் அறிவிக்க வேண்டும் நிறுவுதல் விஸ்தரிப்பு அல்லது மாற்றல் பற்றி அவர் சபைக்கு எழுத்து மூலம் அறிவிக்க வேண்டும் நிறுவுதல் விஸ்தரிப்பு அல்லது மாற்றல் பற்றிச் சபைக்கு அறிவிக்கத் தவறினால் எவ்வித முன்னறிவித்தலன்றி மொத்த நிறுவுதலும் சைபயின் பிரதான இணைப்பிலிருந்து துண்முக்கப்படும்.

பிரதான இணைப்பை தற்போதைய இணைப்புடன் இணைக்குமுன்னர் மேலதிக அல்லது உயர் சக்தி கொண்ட உபகரண உபயோகம் அல்லது தற்போதைய நிறுவுதல்களில் ஏதாவது விஸ்தரிப்பு அல்லது மாற்றம் போன்றவை பரீட்சித்துப் பார்க்கப்படும்.

## 12. Extension of Installation

Should the consumer at any time after supply has been given wish to use lamps, fans or motors or any other equipment of higher rating or instal additional lamps or ohter power consuming apparatus either temporarily, or permenently or in any way alter or extend the wiring on his premise, he should notify he Board in writing giving such notice at least seven days before commencing the work on such extension or alteration of installation.

Failure on the consumer's part to give such notice of connection of extension or alteration renders the installation liable to disconnection from the Board's mains without further notice.

Any other additional or higher rated equipment or any extension or alterations of the installation shall be inspected and tested by the Board before being connected to the existing installation.

# 13. රෙගුලාසි උල්ලංගනය කිරීම :

ඉණ්ඩලය විසින් ගමාට සපයා දී ඇති විදුලිබලය පාරිතෝගිකයා විසින් අනිසි අන්දමින් භාවිතා කිරීම තෝ මණ්ඩලයේ සැමැත්ත නොමැතිව එම විදුලියෙන් යම්කිසි සොවසක් වෙනත් අයෙකුට සැපයිම දඬුවම් පැනවිය හැකි වරදකි. මණ්ඩලයේ සේවා රැහැන් වලට තෝ උපසරණ වලට හිතාමතාම තෝ නොසැලකිල්ලෙන් තෝ අතමීබෙන් හෝ අලාතතානි සිදු කරන තැනැත්තෙකුට ඒ සඳහා අලාතය ගෙවීමට සිදුවන අතර, ඊට අමතරව දඬුවමකුටද යටත්වීමට සිදුවිය හැකිය. එය විදුලි සැපයුම සිඳුමටද හේතුවිය.

#### 13. நிபந்தனைகளை மீறுதல் :

தமக்கு வழங்கப்படும் மின்சாரத்தைத் தவறான முறையில் பாவித்தால் அல்லது தமக்கு வழங்கப்படும் மின்சாரத்தின் பகுதியைச் சபையின் அங்கிகாரமின்றி இன்னொருவருக்கு வழங்கினால் அது அபராதம் விதிக்கப்படக்கூடிய குற்றமாகும்.

ஒருவர் வேண்டுமென்றோ அல்லது தவறுதூலாகளோ சபையின் சேவை மின் லம்பிகளை அல்லது உபகரணத்தைச் சேதப்படுத்தினால் அவர் இச்சேதத்திற்கான தொகைபைச் செலுத்துவதோடு அபராதமும் செலுத்த வேண்டும். அத்துடன் சிறுவதலிள் மின் இவைப்பும் துண்டிக்கப்படலாம்.

#### 13. Breach of Regulations:

It is an offence punishable by the imposition of penalty for any consumer to use the electricity supplied to him improperly or without the consent of the Board to supply any other person with any part of the electricity supplied to him by the Board.

A person who wilfully, negligently or accidentally damages any of the Board's service lines or equipment will be liable for the damage and may also be subject to a penalty. In addition, the installation may be liable for disconnection

### 14. සැපසුම අවසන් කිරීම සඳහා දැකුම්දිම :

තම සැපයුම අවසන් කථවා ගැනීමට පාරිතෝගිකයෙකුට අවශෂ වූ විට, ඒ බව යටත් පිරිසෙයින් සතියකටවත් කලින් ලිබීතව දැනුම්දිය යුතුය. එසේ කිරීමට පාරිතේගිකයා අසමත් වුවතොත්, සැපයුම සිඳුලූ දිනය තෙක් සපයන ලද විදුලිබලය සඳහා ගෙවීම් කිරීමට පාරිතෝගිකයාව සිදුවනු ඇත.

#### 14. மின் இணைப்பு நிறுத்த அறிவித்தல் :

மின் இணைப்பு நிறுத்தப்பட வேண்டுமாயின், அதுபற்றிய அறிவித்தல் ஒருவாரத்திற்கு முன்னர் பாவனையாளரினால் சபைக்கு எழுத்து முலர் சமர்பிக்கப்படல் வேண்டும். அப்படிச் செய்யப்படாதவிடத்து பாவனையாளர் மின்சார இணைப்புத் துண்டிக்கப்படும் நாள்வரை மின்சாரம் இணைப்பு வழங்கப்பட்டதற்சான பாவனையாளர் பணம் செலுத்தவேண்டியிருக்கும்.

### 14. Notice to terminate Supply:

When a consumer wishes to have the supply terminated he should give at least one week's notice in writing. Failure to do so will render the consumer liable for payments for electricity supplied up to the date of the disconnection of supply.

#### 15. කොත්දේසි අයකුම සහ ගාස්තු :

දුයිද්ධ දැන්වීමක් මතින් තෝ පාටිතෝගිකයාව ලිබිත දැනුම්දිමෙන් පසු සැපයුම පිළිබඳ ඉහත සඳහන් කොන්දේසි වලින් සමහරක් හෝ අය සුමය නැතතොත් අය සුමය යවතේ වූ ගාස්තු කලින් කලව සංශෝධනය කිරීමට හෝ දෙනස් කිරීමට මන්ඩලයට හැකිවේ. එබඳු සංශෝධන හෝ වෙනස් කිරීම් එසි දැනුම්දිමේ සඳහන් නියමිත දිනයේ සිට මුයාත්මක වනු ඇත.

#### 15. நிபந்தனைகள், இறுப்பனவு கட்டணங்கள் ஆகியனவற்றில் மாற்றம் :

சபை பாவளையாளருக்கு எழுத்து மூலமாக அறிவித்தல் கொடுத்தோ அல்லது பொது அறிவித்தல் மூலமாகவோ காலத்திற்குக் காலம் மேற்குறிப்பிட்ட விதியோக நிபந்தளைகள், இறுப்பனவுக் கட்டணங்கள் ஆகியனவற்றில் மாற்றங்களைச் செய்யும். இப்படியான திருத்தங்கள் அல்லது மாற்றங்கள் குறிப்பிட்ட அறிவித்தலில் தெரிவிக்கப்பட்ட திகதியிலிருந்து அமுழுக்கு வரும்.

# 15. Revision of conditions, Tariffs and Charges:

The Board may from time to time, on giving notice to the consumer in writing or by public notice, amend or vary any of the above conditions of supply or tariff or Charges thereunder and such amendments or variations shall take effect from the date specified in the said notice.

### 16. මල සාධකය

සැපයුම භාවිතා කෙරෙන බල සාධකය හැකි පමණ ඒකත්වයට සම්පව හැබිය යුතු අතර, එය 0.9 ව වඩා අඩුවීමට ඉඩ නොහැබිය යුතුය, අ.බ. 3 ව හෝ දවො. 2.2 ව වඩා වැඩි මොවර් සහ අඩි සහරක හෝ ඊට වැඩි පියරැසි සවිකුරු සඳහා වෙන වෙනම බල සාධක නිවැරදි කිරීමේ පොහොනා සැපයිය යුතුයි. මුලු වීදුල් පිතිවැවුම සඳහාම මධ්පගත සුවංගුියාකාරී බල සාධක නිවැරදි කිරීමේ උපකරණ සවි කර තිබේ නම් එසේ කිරීම අවගප නොවේ.

# 16. பளுக்காரணி :

மின்சார வழங்கவுக்காக உபயோ கிக்கப்படும் பளுக்காரணி இயலுமானவரை "ஒன்றிலேயே" வைக்கப்பட வேண்டும். அவை ." குதிரை இயக்க சக்தி அல்லது 2.2 கே.வி ஆகிபனவற்றிக்குக் கூடிய கட்டங்களில் 0.9 மீட்டருக்குக் குறைவாக இருக்க வேண்டும். 4 அடியும் அதற்குக் சுடுதலுமான "புளோர சண்ட் "நிறுவுதல்களை பொறுத்தமட்டில் அவைகளுக்குத் தனிப்பட்ட பளுக்காரணி திருத்த திறனமபூட்டிகளைப் பொருத்த வேண்டும். முழு திறுவுதலுக்குப் போதுமான தன்னியக்க பளுக்காரணி திருத்திகள் பொருத்தப்பட்டிருக்குமாயின் இனவுதேவையில்லை.

#### 16. Power Factor:

The Power factor at which the supply is should be kept as near unity as possible and should not be allowed to be lower than 0.9. Metre above 3 H.P. or 2.2 K.W. and fluorescent fitting 4 ft, above should be provided with individual power factor correction capacitors unless centralised automatic power factor correction for the whole installation has been installed.

#### 17. බැර භූලනය කිරීම :

තෙකලා සැපයුම් ලබාදි ඇති අවස්ථාවන්තිදි බැර, කලා භූන අතරේ හැකි පමණ සමානව බේදිය යුතුය.

# 17. பஞலைச் சமப்படுத்தல் :

மூன்று வழி மின் விறியோகம் வழங்கப்பட்டுள்ள இடத்தில். பளு மூன்று வழிகளுக்குமிடையே சரிசமமாகப் பிரிக்கப்படல் வேண்டும்.

#### Balancing of Load:

When 3 phase supplies are provided, the load should be balanced as nearly as practicable among the phases.

# **Annex 5: Standard Electricity Bill**

WPS 2 Bob come Come come come come come come come come c	December Account NO.  Green of the Committee of the Commi			කරුණාකර වෙන් නොකරන්න.	தயவு செய்து கிழிக்காதிகள் Please do not detach	eatte Gradinana Phymen by Bethal	Learning Cash		moceanned eeස්ලයින් මෙනි සිළුවක් sideriaan analgodan Cheque	இன்ற கூறுக்கு இருக்கு நடிக்க இருக்கு நடிக்க இருக்கு இன்ற கூறுக்கு இன்ற முன் கணக்கு இலக்கத்தினை காப் பெண்டிய வருக்கு முன்ற முன் கணக்கு இலக்கத்தினை காப் பெண்டிய வரைவரின் பென்ற முன் மக்கம் குறிப்பிறுக்கள்.	write here reverse of the Cheque as well.	etidad quasa / surlamana (Sec. / Cheque No.				A/C No:	and the County of Line	Amount paid (Rs)		quandle Anternativ Cushier
WPS 2	Commod D cyco.  Resemble D cyc				පාවච්චව කළ මුළු ඒකක කණක / යාබ්දුරු ලාලුයුගෙයුණේ! (ලුයා, / Total No. of Units consumed (kWh)	<b>ுற்றே ag diana actas anda (</b> ch.1/ பாள்த்த அலர்களுக்காள கட்டணம் (ch.n.)/ Charge for Units. consumed (Rs.)	ප්වාසර හන්තු (රු.)/ நිනෙටොහෝ මේනිධාගෙනු (ලු.m.) Fixed Charge (Rs.)	ஓத்தேல் கைத்தி கைத்து (க.) / சரிபோடுள் சிராக்கல் கட்டணம் . Fuel Adjustment Charge (Rs.)	පාවච්ච කළ පිදුලික කඳහා අත කිරීම (රු.1/ Landighs ග්න්පොමුණ්ඩුනගක නුගන්(® (ලා.සා.)/ Charge for electricity consumed (Rs.)	කරපයුම් පිරිචියා (රහා/ රහාල්දුම eagrésies) Geroral (ලායා/Total Cost of Supply (Rs.)	Oxde exembo.c000@(0c.) / agramins transfulb / asplat (ep.n.)/ Governmental Subsidies/Rebutes (Rs.)	ඔබමේ ගාස්තු ගණනයකර ඇති ආකාරය	www.ceb.lk சென்ன இல்னை கூள் உங்கள் கொடுப்பனவு கணக்கிடப்பட்டுள்ள விகம் பர்ளி www.ceb.lk புலம்	அறிந்துகொள்ளுங்கள்	Visit www.ceb.lk for more information on calculation of your electricity charges	මෙහි දන සිට දන 30ක් ඇතුළත ගෙවම නොකළහොත් විදුලිය විසන්ධි කෙවේ.	இத்தினத்தி லீருந்து 30 நா.' கதைக்குள்ளாக செலுந்தபா வில்லைபெனிவி மின் துண்டிப்புச்செப்பப்படும்.	If not paid within 30 days hereof the electricity supply will be disconnected.	වලුලිය නිඇවරටමි: 011:2146464 හෝ 1987 අම්පත්ත	மின்சாரத்தடை011-2146464 அல்ல்து 1987 Interruptions to Electricity Supply: assemmin தமிக Call 011-2146464 or 1987
Confedent microsity of the control o	இல்கள் அதன்க கள අය இற்ற சலை கඳහන් பட்டி வளவ் ව ඇත. உற்கள் கடந்த மந்த அழங்டு கிழ் கூர்ட்ப்கட்டுள்ள வீதமாகத் தயரிக்கப்பட்டுள்ளது. Your charges for the last month were made up as shown below.	අත කුම කෝටික යනුවේ. ලි ගුන්ගුනාග Tanif Block	cnibbb me Base antes / unsight stressand / Units consumed					ALL SALES BASES BA	லைறை me பாவித்த ப Charge for	98 €2000 (46,411,)(704	வாசிப்பு/ Meter Reading வரிப்பு (கு	9886	www		Visit		#48			மில்த pocodooce, unall anafilunani Meter Reader
ලංකා පැළබනල මන්තලයා ජාතුණ පිළඹ ගිණුම් පුතාශනයා Month නිනේක්ණය ගිණිපා අනයා රියින් නොස්තුරු සැබුවා අත ලකුම්ක Ceylon Electricity Stard	ততিমুক্ত ব্যক্ত elamins இक. Premises ID Rev Rev Ar Ms			organ gamesta rapes general grade age general actions a separation of a separ	ලකුසිය පුසාහනය දක්වා වූ මුව මූදය රූ./පසුනිය පේෂය + පසුනිය නිල යෙ. බුදු යාදේශා ගෙනැග්නාගේ පුදාදිසිදුණයා. පුණා. පුණ්ණකයා පිළිතුනයෝ සැඑළ හේ.පාණ නියාTotal amount up to the last statement (Previous	alance+Last bill) (Rs)	aBE® /tocaektan/ DEO® Oz./ GantBillusequesil/ お伝表知 / 生信句 GLF.	Fayments/Adjustments/Rebates (Ks)		මෙම දියට පේමය රා./ මුණුම්හැම්මුම්ම ම්මූහනය ලාය: Outstanding amount (Rs) at	දිනය මනු කියදවුම/ ගැන් නෑජ	явья Date				രായില്ല് മുത മുത്ത തന്തെ പന്തിച്ചുക കുടുള്ളുകൾ /No. of units consumed	මෙම මයා අය බර්ම රු   රු   යා ක්රීම් නිස්තාව දැන්වීම ලැබ් සිරිසාම ක්රීම්යමම Charge for electricity consumed Rs.	Charge for this exceeding DOCO Ca. / \$65\$pb / aglagun. Adjustments/Rebates (Rs)	මෙවිය යුතු මුළු මුදල රටය./ මැතුවල්ලාය එයනේතුයා ගුදල්ල්ල්ලනයෙන (ලා.)* Total amount due (Rs)	වදුලිබලයෙන් සහිරමත් දවයක් නොගොතා හොඩුරෝගුන රැබෙහොට Enrich Life through Power

Supply Services Code Annex 5- ii

# Methodology for Estimation of Energy Supplied

# **TABLE OF CONTENTS**

TΑ	BLE OF CC	ONTENTS	1
1.	INTROD	JCTION	2
2.	APPLICA	BILITY	3
3.	OBJECTI	VES	3
4.	SCOPE		3
5.	DEFINITI	ONS	3
6.	GENERA	L INTERPRETATION	5
7.	APPLICA	TION OF THE METHODOLOGY	5
	7.1. Electr	icity supply with the absence of a Meter	5
	7.1.1.	Estimation of Energy consumption	5
	7.1.2.	Correction of estimated Energy consumption	5
	7.1.3.	Adjustment of charges	6
	7.2.A Met	er is proved to registering incorrectly	6
	7.2.1.	Calculation of the Error	
	7.2.2.	Consumer's acknowledgement	6
	7.2.3.	Estimation of Energy consumption	7
	7.2.4.	Under-Registering Energy consumption	7
	7.2.5.	Over-Registering Energy consumption	7
	7.2.6.	Estimation of Maximum Demand	8
	7.2.7.	Replacement of Meter	8
	7.3.The m	alfunctioning of any Meter (Meter stopped registering)	8
	7.3.1.	Correction of Energy consumption where the period of malfunctioning can be ascertained	ed8
	7.3.2.	Correction of Energy consumption where the period cannot be ascertained	8
	7.3.3.	Estimation of Energy consumption where past Energy consumption data is available	8
	7.3.4.	Estimation of Energy consumption where past Energy consumption data is not available	9
	7.3.5.	Adjustment of charges	9
	7.3.6.	Replacement of Meter	9
	suppli	erson altering the register of any Meter used for measuring the quantity of electricity ed to any premises or preventing any Meter from duly registering the quantity of icity supplied through the Meter	9
	7.4.1.	Correction of Energy consumption where the period can be ascertained	9
	7.4.2.	Determination of period for estimating in case of period cannot be ascertained	9
	7.4.3.	Estimation of Energy consumption	9
	7.4.4.	Adjustment of charges	.10
	7.4.5.	Disposing of Meters	.10
8.	ESTIMAT	TION OF ENERGY CONSUMPTION IN THE ABSENCE OF AN AGREEMENT	.10
ΑP	PENDICES		.11

# 1. INTRODUCTION

In terms of item 3 of Condition 35 of the Electricity Distribution & Supply Licence read together with Subsection 3 of Sections 49 and 50 of the Sri Lanka Electricity Act, No 20 of 2009, this Methodology for Estimation of Energy is approved by the Commission on the basis of the following. This document may be cited as the Methodology for Estimation of Energy and shall come into effect on the date on which this document is issued.

- a) In terms of item 5(1) of Schedule (III) of the Electricity Act, No. 20 of 2009, where a consumer of electricity is to be charged for his or her supply wholly or partly by reference to the quantity of electricity supplied, the Distribution Licensee may in the normal course of business, estimate the amount of electricity consumed by the consumer and recover charges accordingly, so long as the estimated consumption is confirmed by a Meter reading within a reasonable period of time.
- b) In terms of item 5(2) of Schedule (III) of the Electricity Act, No. 20 of 2009, a Distribution License shall be entitled to estimate consumption and recover charges accordingly, in the event of:
  - (i) A Meter (by which the quantity of electricity supplied to any consumer is ascertained) being proved to register consumption incorrectly;
  - (ii) The malfunction of any Meter; or
  - (iii) Any person altering the register of any Meter used for measuring the quantity of electricity supplied to any premises.
- c) In terms of item 5(3) of schedule III of the Sri Lanka Electricity Act, No. 20 of 2009, where the consumption of electricity has been estimated by a Distribution Licensee in accordance with item a) and b) above, the consumer shall pay for any electricity consumed in accordance with the estimate prepared by the Distribution Licensee or otherwise determined in accordance with the provisions relating to dispute resolution.
- d) In terms of item 1 (c) of Section 14 of the Sri Lanka Electricity (Amendment) Act, No 31 of 2013, every person who, intentionally or negligently
  - (i) alters the quantity of electricity as registered on any meter used for measuring the quantity of electricity supplied to any premises by a distribution licensee; or
  - (ii) prevents any meter from duly registering the quantity of electricity supplied through that meter,
  - shall be guilty of an offence under Sri Lanka Electricity Act, No.20 of 2009 and shall be liable on conviction after summary trial before a Magistrate in addition to a penalty of not less than ten thousand rupees and not exceeding fifty thousand rupees, to a fine in a sum of money being the value of the loss or damage caused to the licensee as a result of the act or default constituting such offence, and any sum recovered as such additional fine shall be paid to the licensee on application made to Court by such licensee.
- e) In terms of Sections 49(3) and 50(3) of the Sri Lanka Electricity Act, No. 20 of 2009, in the absence of any agreement and the extraction or improper use of electricity respectively, a licensee may charge for Energy supplied to any consumer in accordance with any method of charging provided for in the license.

- f) In terms of Condition 35 of the Electricity Distribution and Supply Licenses, a Distribution Licensee may estimate Energy supplied in the absence of an agreement in the event of:
  - (i) Electricity supply with the absence of a Meter;
  - (ii) A Meter is proved to registering incorrectly;
  - (iii) The malfunction of any Meter;
  - (iv) Any person altering the register of any Meter used for measuring the quantity of electricity supplied to any premises.

In any other event the Distribution Licensee may adopt a reasonable methodology for estimation of Energy consumption and apply charges in accordance with Tariffs and Charges approved by the Commission.

# 2. APPLICABILITY

This methodology is applicable to Distribution Licensees, Customers and Consumers.

# 3. OBJECTIVES

The primary objective of this methodology is to define the method and procedure to be followed when estimating the consumption of Energy under specified events. It intends to encourage Distribution Licensees to ascertain the quantity of electricity supplied to Consumers by a Meter or Meters and to discourage Distribution Licensees from supplying electricity without Meters as well as supplying electricity through reported incorrectly registering Meters or reported malfunctioning (stopped registering) Meters. It also intends to encourage Consumers to take proper care of electricity Meters and inform the respective Distribution Licensee of any failure do so or abnormal Meter reading.

# 4. SCOPE

The methodology is to be applied in the event of item i, ii, iii and iv of Condition 35 of the Electricity Distribution & Supply Licenses, and item 1(a) & 1 (b) of the Section 49 and 50 of the Sri Lanka Electricity Act, No 31 of 2013.

# 5. DEFINITIONS

TERM	Definition
Act	Sri Lanka Electricity Act, No 31 of 2013
Agreement	Standard tariff agreement between the Distribution Licensee and the
	Customer to supply electricity
Allowed Creeping	When no load is connected at Customer premises, the disc of an
Condition	analog Meter may rotate slowly up to one rotation
Billing Period	Period of time between two consecutive Meter readings
Bulk Customer	A Customer whose contract demand exceeds 42kVA
Charges	Charges approved by the Commission under Section 30 of Act, No. 20
	of 2009.
Commission	Public Utilities Commission of Sri Lanka
Consumer	A Consumer of electricity in Sri Lanka and includes a prospective

TERM	Definition		
	Consumer.		
Contract Demand	Maximum real (kW) or apparent (kVA) power Demand agreed to be supplied by the Licensee/Supplier as stated in the declaration made by the Customer or as computed from the service connection current rating		
Customer	Means a Tariff Customer		
Declared Voltage	A voltage or voltages declared by a Distribution Licensee for the supply of electricity to a Customer		
Demand	The requirement for active power and reactive power unless otherwise stated		
Distribution	A person who has been granted a distribution licence by the		
Licensee	Commission under section 13(1)(c)(i)(c) of the Electricity Act, No. 20 of 2009;		
Energy	Quantity of electrical Energy measured in units equal to one kilowatt hour (kWh) or multiples thereof such as:  1000 Wh = 1 kWh  1000 kWh = 1 MWh  1000 MWh = 1 GWh		
Error	percentage Error calculated according to below formula		
	$e = \frac{ (\text{Recorded Energy consumption of the reported incorrectly registering Meter} - \\ Recorded Energy consumption of the series Test Meter) \times 100\% }{ \text{Recorded Energy consumption of the series Test Meter} }$		
Load Factor	Ratio of total amount of Energy delivered during a given period to the total amount of Energy that could have been delivered, had the Maximum Demand been maintained throughout the same period. It is usually expressed as a percentage.		
Maximum Demand	The greatest of all Demands of the load that has occurred within a specified period of time		
Meter	Equipment used to measure electricity consumption and Maximum Demand during a particular period, including the current transformers, voltage transformers, power transformer, connection wires and Meter mounting		
Meter Malfunctioning	Meter has stopped registering the Energy consumption		
Over-Registering	The Meter registering the Customer's Energy consumption more than the correct value		
Power Factor	Ratio of active power (kW) to apparent power (kVA)		
Retail Customers	A Customer whose Contract Demand is less than 42 kVA		
Service Connection Amperage	Maximum current (A) agreed to be supplied by the Licensee/Supplier as stated in the standard tariff agreement		
Tariff	Tariffs approved by the Commission under Section 30 of the Act, No. 20 of 2009.		
Test Meter	A Test Meter or instrument connected in series and is calibrated to measure the electricity supplied through the Meter/ equipment		
Under-Registering	The Meter registering the Customers Energy consumption less than the correct value		

TERM	Definition
Utilization Factor	Ratio of the Customers Maximum Demand to the Contract Demand

# 6. GENERAL INTERPRETATION

- 6.1. When a word or a phrase that is defined in the "Definitions and Abbreviations" is more particularly defined in another Code of the Distribution Code and if there is any inconsistency between the two definitions, the latter or that particular definition shall prevail.
- 6.2. Any reference to a gender shall include all genders.
- 6.3. Any reference to a person or entity shall include an individual, partnership, company, corporation, association, organization, institution, or other similar groups.
- 6.4. Unless otherwise specified, singular shall include the plural and vice-versa.
- 6.5. The word including or a grammatical variation thereof means "including but not limited to"
- 6.6. A reference to a standard shall include any revision, update or a replacement of that standard.

# 7. APPLICATION OF THE METHODOLOGY

Where a Consumer of electricity supplied by a Distribution Licensee is to be charged for supply, wholly or partly by reference to the quantity of electricity supplied, then, unless otherwise agreed between the Consumer and the Distribution Licensee, the supply shall be given through, and the quantity of electricity shall be ascertained by an appropriate Meter or Meters as the case may be.

# 7.1. Electricity supply with the absence of a Meter

# 7.1.1. Estimation of Energy consumption

In the event, a Consumer and a Distribution Licensee has agreed that the supply of electricity shall be given with the absence of a Meter or Meters, as the case may be, the Distribution Licensee shall in the normal course of business estimate the amount of electricity consumed by the Consumer on the basis of the average Energy consumption of Customers belong to the same Tariff category, and where applicable the Maximum Demand, identified in Appendix 1, and recover charges in accordance with the Tariffs and Charges applicable for the relevant period. Where Time of Use is applicable, the distribution of Energy consumption among the time intervals shall be based in accordance to Appendix II.

The Distribution Licensee shall determine the charges accordingly until the estimates are confirmed by a Meter reading within a reasonable period of time. However, the said reasonable period of time shall not be more than six (6) Billing Periods.

# 7.1.2. Correction of estimated Energy consumption

Once the Meter or Meters, as the case may be, are fixed, the Customer's Energy consumption measured and recorded over the first three (3) Billing Periods shall be prorated and applied for

the period of estimation. Where applicable the Maximum Demand shall be the average of the three Billing Periods.

### 7.1.3. Adjustment of charges

The correct charges for the period of estimation shall be determined in accordance with the Tariffs and Charges applicable for the relevant period as indicated below

# 7.1.3.1. Adjustment of charges, where the period of estimation is less than six Billing Periods

Where the period of estimation is less than six Billing Periods the charges shall be determined in accordance with the approved Tariffs and Charges applicable for the relevant period.

# 7.1.3.2. Adjustment of charges, where the period of estimation exceeds six Billing Periods

Where the period of estimation exceeds six Billing Periods, the charges in respect of the first six (6) Billing Periods shall be determined in accordance with the approved Tariffs and Charges applicable during such period, and the charges in respect of the period in excess of the six (6) Billing Periods shall be determined in accordance with the approved fixed charge applicable during such period (considering as zero energy consumption and where applicable, zero Maximum Demand) i. e. The Tariff in respect of the Energy consumed and Maximum Demand during the period in excess of the first six (6) Billing Periods shall not be charged.

The Customer's account shall be adjusted accordingly, and where the Customer has been over charged, the adjusted amount shall be credited to the Customer's account within three (3) Billing Periods.

Where the Customer has been undercharged, the Customer shall be given a minimum of 06 Billing Periods for settlement of the correct charges from the appearance of the adjustment in the bill, without any penalty being imposed.

# 7.2. A Meter is proved to registering incorrectly

# 7.2.1. Calculation of the Error

Where a Meter is suspected to be registering incorrectly, the Error, if any, will be ascertained by an instrument or a Meter calibrated for this purpose (referred to herein as a Test Meter), connected in series. The Error (e) will be calculated according to the formula below:

 $= \frac{\text{(Recorded Energy consumption of the reported incorrectly registering Meter - }}{\text{Recorded Energy consumption of the series Test Meter)} \times 100\%}$ 

# 7.2.2. Consumer's acknowledgement

Prior to ascertaining the Energy, if any, the Licensee shall explain to the Consumer the procedure to be followed and the formula to be used in doing so. In addition, the Licensee shall display the readings of both the series Test Meter and the reported incorrectly registering Meter and obtain the Consumer's acknowledgement of same. Further, the Licensee shall also explain to the Consumer his or her right to lodge a complaint if he or she is not satisfied that the Licensee followed the procedure as acknowledged by the Consumer and/ or the conclusion arrived through the procedure.

# 7.2.3. Estimation of Energy consumption

If the magnitude of the Error so determined is greater than 2.5% (|e| > 2.5%), except under allowed creeping condition (under no load condition i.e. the current though the current coil of an analog Meter is zero, the disc of the Meter may rotate slowly up to one rotation, before getting stopped), the Meter will be proved to be registering incorrectly. The Error shall then be used to correct the recorded Energy consumption of the Customer for the relevant Billing Period according to the formula given below:

Estimated Energy consumption for the relevant Billing Period  $= \frac{\text{Recorded Energy consumption for the relevant Billing Period} \times 100}{100 + e}$ 

# 7.2.4. Under-Registering Energy consumption

# 7.2.4.1. Correction of Energy consumption where Consumer has reported the Error

Where the Consumer has reported that the Meter is registering incorrectly and the Meter is proven to have been under-registering the Energy consumption, the recorded Energy consumption shall be corrected only in respect of the current Billing Period and recorded Energy consumption of the Customer in respect of previous Billing Periods shall not be corrected.

# 7.2.4.2. Correction of Energy consumption where Licensee has detected the Error

Where the Distribution Licensee has detected that the Meter is registering incorrectly and the Meter is proven to have been Under-Registering the Energy consumption, the recorded Energy consumption shall be corrected in respect of the period commencing the date of the detection, which shall not exceed three (3) Billing Periods.

A summary of the correction periods identified in 7.2.4.1 and 7.2.4.2 is given in Appendix III (A).

# 7.2.4.3. Adjustment of charges

The correct charges for the period of incorrect Meter registering shall be determined in accordance with the Tariffs and Charges applicable for the relevant period.

Where the Customer has been undercharged, he/she shall be given a period commencing from the appearance of the adjustment in the bill and equal to that in respect of which his/her recorded Energy consumption was corrected, for settlement of related charges, without any penalty being imposed.

# 7.2.5. Over-Registering Energy consumption

# 7.2.5.1. Correction of Energy consumption where Consumer has reported and period can be ascertained

Where the Consumer has reported that the Meter is registering incorrectly and the Meter is proven to have been over-registering the Energy consumption, and the period of such incorrect Meter registering can be ascertained, the recorded Energy consumption of the Customer shall be corrected in respect of the corresponding Billing Period(s).

# 7.2.5.2. Correction of Energy consumption where Consumer reported and period cannot be ascertained

Where the Consumer has reported that the Meter is registering incorrectly and the Meter is proven to have been Over- Registering the Energy consumption, but the period of such incorrect Meter registering cannot be ascertained, the recorded Energy consumption of the Customer shall be corrected from the date of reporting. Notwithstanding the date of reporting, the correction shall not be less than 12 Billing Periods.

# 7.2.5.3. Correction of Energy consumption where Licensee has detected

Where the Distribution Licensee has detected that the Meter is registering incorrectly and the Meter is proven to have been Over-Registering the Energy consumption, the recorded Energy consumption of the Customer shall be corrected in respect of corresponding Billing Period(s), which shall not be less than three (3) Billing Periods.

A summary of then correction periods identified in 7.2.5.1, 7.2.5.2 and 7.2.5.3, is given in Appendix III (B).

# 7.2.5.4. Adjustment of charges

The correct charges for the period of incorrect Meter registering shall be determined in accordance with the Tariffs and Charges applicable for the relevant period, and the Customer's account shall be adjusted accordingly within three (03) Billing Periods.

### 7.2.6. Estimation of Maximum Demand

Where applicable, the Maximum Demand of the Customer shall be estimated by the Licensee on a case by case basis and determine the charges in accordance with the Tariff and Charges applicable for the relevant period.

# 7.2.7. Replacement of Meter

The Meter(s) shall be replaced within one Billing Period.

# 7.3. The malfunctioning of any Meter (Meter stopped registering)

# 7.3.1. Correction of Energy consumption where the period of malfunctioning can be ascertained

Where any Meter is reported by the Consumer or is detected by the Distribution Licensee to be malfunctioning i.e. the Meter has stopped registering altogether, and where the period of such malfunctioning can be ascertained by inspection of the Meter reading record(s) or by other means, such period shall be used to determine the Energy consumption of the Consumer and related charges shall be corrected in respect of such period.

# 7.3.2. Correction of Energy consumption where the period cannot be ascertained

Where any Meter is reported by the Consumer or is detected by the Distribution Licensee to be malfunctioning i.e. the Meter has stopped registering altogether, but where the period of such malfunctioning of the Meter cannot be ascertained by inspection of the Meter reading record(s) or by other means, the Energy consumption of the Consumer and related charges shall be corrected in respect of the period commencing the date of reporting or the date of detection, as the case maybe. Notwithstanding the date of reporting or the date of detection, the correction period shall not exceed 12 billing periods.

# 7.3.3. Estimation of Energy consumption where past Energy consumption data is available

The Energy consumption shall be estimated based on the average Energy consumption of the immediately preceding consecutive three (03) Billing Periods (or such other 3 Billing Periods as mutually agreed by the Customer and the Distribution Licensee) prorated for the period of such malfunctioning. Where applicable, the Maximum Demand shall be estimated based on the average of the recorded Maximum Demand of the immediately preceding 03 Billing Periods (or such other 3 Billing Periods as mutually agreed by the Customer & the Licensee).

# 7.3.4. Estimation of Energy consumption where past Energy consumption data is not available

Where past Energy consumption data is not available or the past Energy consumption is nil, once the Meter or Meters, as the case may be, are replaced, the Customer's Energy consumption measured and recorded over the first three (3) Billing Periods shall be prorated and applied for the period of estimation. Where applicable the Maximum Demand shall be the average of the three Billing Periods.

# 7.3.5. Adjustment of charges

The correct charges for the period of Meter Malfunctioning shall be determined in accordance with the Tariffs and Charges applicable for the relevant period, and the Customer account shall be adjusted accordingly.

Where the Customer has been undercharged, the Customer shall be given not less than a corresponding period as the period of Malfunctioning Meter for settlement of related charges from the appearance of the adjustment in the bill, without any penalty being imposed.

# 7.3.6. Replacement of Meter

The Meter(s) shall be replaced within one Billing Period.

# 7.4. Any person altering the register of any Meter used for measuring the quantity of electricity supplied to any premises or preventing any Meter from duly registering the quantity of electricity supplied through the Meter

# 7.4.1. Correction of Energy consumption where the period can be ascertained

Where any person is convicted of an offence under Section 50 (1) (c) the Act, No 31 of 2013 as amended, and the period of altering the register of any Meter used for measuring the quantity of electricity supplied to any premises or preventing any Meter from duly registering the quantity of electricity supplied through the Meter can be determined by inspection of the Meter reading record(s) or by other means, the recorded Energy consumption shall be corrected in respect of such period. However, the correction period shall not exceed 12 Billing Periods.

# 7.4.2. Determination of period for estimating in case of period cannot be ascertained

Where any person is convicted of an offence under Section 50 (1) (c) the Act, No 31 of 2013 as amended, but the period of altering the register of any Meter used for measuring the quantity of electricity supplied to any premises or preventing any Meter from duly registering the quantity of electricity supplied through the Meter cannot be determined by inspection of the Meter reading record(s) or by other means, the recorded Energy consumption shall be corrected in respect of the preceding three (3) Billing Periods.

# 7.4.3. Estimation of Energy consumption

In respect of Retail Customers, the Contract Demand in kVA shall be determined based on the Declared Voltage, Service Connection Amperage and number of phases. In respect of the Bulk Customers, the Contract Demand shall be the same as that identified in the Bulk Customer's Standard tariff Agreement. Where the Contract Demand is given in kW, the Contract Demand in kVA shall be calculated using the applicable Power Factor of the respective Tariff category given in Appendix IV of this Methodology.

The corrected Energy consumption of the Consumer, for each day of the period of alteration of the Meter(s) shall be estimated according to the formula below:

```
Estimated daily Energy consumption (kWh) = Contract Demand (kVA)x(Utilization Factor)x (Load factor)x(Power Factor)x(24 hours)
```

The Utilization Factor, Load Factor and the Power Factor applicable to each Tariff category are given in the said Appendix IV. In respect of Bulk Customers whose Contract Demand is higher than 160 kVA, the Utilization Factor shall be decided by the Licensee on case by case basis.

Where applicable, the Maximum Demand shall be estimated according to the formula below:

Maximum Demand (kVA) = Contract Demand in (kVA) x (Utilization Factor)

Where Time of use is applicable, the distribution of Energy consumption among the time intervals is given in the Appendix II.

However, where the recorded energy consumption of the Customer for any Billing Period identified according to either 7.4.1 or 7.4.2 above is higher than the estimated Energy consumption for the same billing period, the Energy consumption for such period shall not be corrected,

# 7.4.4. Adjustment of charges

The correct charges for the period of altering the register of the Meter or preventing it from duly registering the quantity of electricity supplied shall be determined in accordance with the Tariffs and Charges applicable for the relevant period.

### 7.4.5. Disposing of Meters

Where any person is convicted of an offence under Section 50 (1) (c) the Act, No 31 of 2013 as amended, and the Meter(s) in respect of which the offence was committed is removed, the Distribution Licensee shall keep the Meter(s) in safe custody until the Commission authorizes the Distribution Licensee to destroy or otherwise dispose of it.

# 8. <u>ESTIMATION OF ENERGY CONSUMPTION IN THE ABSENCE OF AN</u> AGREEMENT

Where any person is convicted under Sections 49(1) or 50(1) of the Act, No 20 of 2009 as amended, a certificate issued by the Distribution Licensee shall be received as proof of the value of the loss or damage caused to the Distribution Licensee as a result of the act or default constituting such offence, in the absence of evidence to the contrary. In the absence of any Agreement, a Distribution Licensee may estimate and charge for the Energy and where applicable Maximum Demand on case by case basis.

# **APPENDICES**

Appendix I: Estimated daily Energy consumption where the Consumer has been given a supply of electricity in the absence of a Meter

Customer Type		Contract Demand (A)	Average Consumption <sup>1</sup> (kWh per day of billing)		Maximum Demand (kVA)
			Single phase	Three phase	
		15	1	N/A	N/A
Domestic	Domestic		2	6	N/A
(D-1)		60	N/A	12	N/A
		100	7	21	N/A
		15	3	9	N/A
Religious		30	5	15	N/A
(R-1)		60	10	30	N/A
		100	17	51	N/A
Constant Borrow	. 4	15	3	9	N/A
General Purpose (GP-1)	e- 1	30	6	18	N/A
(01-1)		60	12	36	N/A
Government- 1		15	3	9	N/A
(GV-1)		30	6	18	N/A
(60 1)		60	12	36	N/A
Hotel-1		15	7	21	N/A
(H-1)		30	13	39	N/A
		60	26	78	N/A
Industrial-1		15	9	27	N/A
(I-1)		30	17	51	N/A
(/		60	34	102	N/A
General	≤160 kVA	All	565		45
Purpose- 2 (GP-2)	>160kVA	All	To be decided on case by case basis by the Distribution Licensee		
Government-	≤160 kVA	All		565	45
2 (GV-2)	>160kVA	All	To be decided on case by case basis by the Distribution Licensee		
Hotel-2 (H-2)	≤160 kVA	All	1670 1		120
	>160kVA	All	To be decided on case by case basis by the Distribution Licensee		
1.1.1.1.1.1.2.1	≤160 kVA	All		1100	90
Industrial-2 (I- 2) >160kVA		All	To be decided on case by case basis by the Distribution Licensee		

\_

<sup>&</sup>lt;sup>1</sup>Calculated on the basis of monthly average electricity sales data indicated in the Statistical Digest 2011, published by Ceylon Electricity Board

Customer Type	Contract Demand (A)	Average Consumption <sup>1</sup> (kWh per day of billing)		Maximum Demand
customer Type		Single phase		(kVA)
General Purpose- 3 (GP-3)	All	To be decided on case by case basis by the Distribution Licensee		
Government- 3 (GV-3)	All	To be decided on case by case basis by the Distribution Licensee		
Hotel-3 (H-3)	All	To be decided on case by case basis by the Distribution Licensee		
Industrial-3 (I-3)	All	To be decided on case by case basis by the Distribution		

# Appendix II: Distribution of Energy consumption among the time intervals where the Customer is charged under the time of use Tariff

Interval	Percentage Consumption
Day	50%
Peak	15%
Off Peak	35%

# Appendix III (A): Determination of correction period of Under-registering

<b>Customer Reported</b>	Licensee detected		
No back- charge	Back- charge up to date of detection but not more than 3 billing periods		

# Appendix III (B): Determination of correction period of Over-registering

		Customer Reported	Licensee detected
Exact period of incorrect registering can be ascertained	Yes	Refund for the ascertained period of incorrect registering	Back- charge up to date of detection but not less
	No	Back- charge up to date of reporting but not less than 12 billing periods	than 3 billing periods

Appendix IV: Applicable Power Factors, Utilization Factors and Load Factors for estimation of Energy where any person is convicted of altering the register of any Meter used for measuring the quantity of electricity supplied to any premises or preventing any Meter from duly registering the quantity of electricity supplied through the Meter

Customer Category		Utilization Factor	Load Factor	Power Factor
Domestic (D-1)		0.3	0.25	0.95
Religious (R-1)		0.5	0.25	0.95
Industrial-1 (I-1)		0.5	0.4	0.85
Hotel-1 (H-1),Gene (GP-1), Government	•	0.5	0.4	0.95
Industrial-2(I-2), Hotel-2(H-2)	≤160 kVA	0.5		
	>160kVA	case by case basis	0.5	0.85
General Purpose-2	≤160 kVA	0.5		
(GP-2), Government (GV-2)	>160kVA	case by case basis	0.5	0.90
Industrial- 3(I-3), Hot	:el- 3(H-3)	sasa by sasa	0.5	0.85
General Purpos Government (GV-3)	e-3 (GP-3),	case by case basis	0.5	0.9

#### Annex 7: Public Utilities Commission of Sri Lanka

The Public Utilities Commission of Sri Lanka (PUCSL) has been established under Act, No. 35 of 2002. It has been empowered to regulate the economic, technical and safety aspects of the industry, under the provisions of the Sri Lanka Electricity Act, No. 20 of 2009.

The PUCSL carries out its regulatory activities in accordance with the PUCSL Act, Sri Lanka Electricity Act and general policy guidelines issued by the Cabinet of Ministers through the Minister of Power and Energy and issues licenses for generation, transmission, distribution and supply of electricity. Consumer protection, setting of tariffs and charges, promotion of quality, reliability and safety of electricity generation, transmission, distribution and supply, promotion of energy security and efficient use of energy are the broader areas of their regulatory intervention. The PUCSL consults stakeholders, as appropriate, in their regulatory decision making process. They collect and disseminate information on electricity industry to all stakeholders. The PUCSL is tasked with resolving, by mediation, any dispute between a licensee and any other affected party. Please contact the PUCSL for further information.

#### **Contact details of PUCSL**

Public Utilities Commission of Sri Lanka 6th Floor, BOC Merchant Tower St. Michael's Road, Colombo 3, Sri Lanka.

Telephone: (011)2392607/8

Fax: (011)2392641

E-mail: info@pucsl.gov.lk Website: www.pucsl.gov.lk

Supply Services Code Annex 7- i

#### Annex 8

## GUIDELINES ON WAYLEAVE AND FELLING OR LOPPING OF TREES

#### **ISSUED BY:**

#### PUBLIC UTILITIES COMMISSION OF SRI LANKA

Version 3.0

Reference: PUC/E/RA/GUI/01

Date: 17<sup>th</sup> October 2013

These guidelines are prepared in terms of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended) and approved by the Commission on 17<sup>th</sup> October 2013. The licensees and the Divisional Secretaries are expected to follow these guidelines in discharging their respective powers and duties under the said Act. All the previous guidelines issued by the Commission in this regard are hereby repealed.

## TABLE OF CONTENTS

DEFINITIONS	1
PART 1 – INTRODUCTION	3
PART 2 – GUIDELINES ON WAYLEAVE	5
PART 3 – GUIDELINES ON FELLING OR LOPPING TREES	8
PART 4 – ENTERING INTO PREMISES	9
PART 5 – INFORMATION FOR THE GENERAL PUBLIC	11
PART 6 – GENERAL	13
APPENDIX I – NOTICE REQUIRING WAYLEAVE	15
APPENDIX II – WAYLEAVE AGREEMENT	17
APPENDIX III – APPLICATION REQUIRING AUTHORITY TO INSTALL/KEEP INSTALLED AN ELECTRIC LINE	19
APPENDIX IV – RECOMMENDATION TO ACQUIRE WAYLEAVE	21
APPENDIX V – NOTICE REQUIRING TO FELL OR LOP A TREE	23
APPENDIX VI – REFERRAL OF A MATTER RELATING TO FELLING OR LOPPING TREE(S)	
APPENDIX VII – NOTICE OF INTENDED ENTRY TO A LAND OR PREMISES	27

### **Definitions**

- 'dwelling' means a building or part of a building occupied or (if not occupied) last occupied or intended to be occupied, by a private dwelling.
- 'distribute' means distribute by means of a system which consists (wholly or mainly) of low voltage lines and electrical plant and is used for conveying electricity to any premises or to any other distribution system

'electric line' means any line whether underground or over ground which is used for carrying electricity for carrying electricity for any purpose and includes, unless the context otherwise requires –

- (a) any support for any such line, including but not limited to, any structure, pole or other thing in, on, by or from which any such line is or may be supported, carried or suspended;
- (b) any apparatus connected to any such line for the purpose of carrying electricity; and
- (c) any wire, cable, tube, pipe or other similar thing (including its casing, insulator or coating) which surrounds or supports or is surrounded or supported by or is installed in close proximity to or is supported, carried or suspended in association with, any such line.
- 'electrical plant' means any plant, equipment, apparatus or appliance used for or for purposes connected with, the generation, transmission, distribution or supply of electricity, other than
  - (a) an electric line;
  - (b) a meter used for ascertaining the quantity of electricity supplied to any premises; or
  - (c) an electrical appliance under the control of a consumer
- 'Electricity Act' means the Sri Lanka Electricity Act, No. 20 of 2009 (as amended by the Act, No. 31 of 2013).
- 'licensee' means a person who has been granted a license to generate, transmit or distribute electricity.
- 'premises' includes any land, building or structure.
- 'supply' means supply of electricity to any premises (other than the premises occupied by a licensee for the purpose of carrying on the activities which it is authorized by its license to carry on) but shall exclude bulk sales of electricity.

'transmit' means the transportation of electricity by means of a system, which consists (wholly or mainly) of high voltage lines and electrical plant and is used for conveying electricity from a generating station to a sub-station, from one generating station to another or from one sub-station to another.

'wayleave' means such interest in the land as consists of a right of a licensee to install and keep installed an electric line on, under or over a land and to have access to that land for the purpose of inspecting, maintaining, adjusting, repairing, altering, removing or replacing such electric line.

### Part 1 – Introduction

- 1.1 The Public Utilities Commission of Sri Lanka (hereinafter referred to as the 'Commission'), established under the Act, No. 35 of 2002, is the economic, safety and technical regulator of the electricity industry in Sri Lanka. In terms of the Sri Lanka Electricity Act, No. 20 of 2009 and (Amendment) Act, No.31 of 2013(hereinafter referred to as 'Electricity Act'), the Commission is required to ensure an efficient and economical system of electricity supply is provided for and maintained throughout Sri Lanka, at all times.
- 1.2 For any purpose connected with the carrying on of the activities authorized by its license, a requirement may arise for a licensee to install and keep installed an electric line on, under or over any land. Upon installing an electric line, licensee would need to have access to that land for the purpose of inspecting, maintaining, adjusting, repairing, altering, removing or replacing such electric line. Licensee requires the consent of the owner or occupier of a land to install and keep installed an electric line and to have access to the land for the said purposes. The items 3 and 5 of Schedule I of the Electricity Act specify the procedure to be adopted by the licensees: in obtaining such consent from the owner or occupier of the land; and (upon failing to obtain consent) in applying for/obtaining authority for same.
- 1.3 The item 4 of Schedule I of the Electricity Act contains the provisions relating to the payment of compensation: to the owner of a land in respect of a grant of wayleave and to any person in respect of damages or disturbances caused in the exercise of any right by a licensee conferred by a wayleave.
- 1.4 A requirement might arise to fell or lop or cut back its roots when a tree is or will be in such close proximity to an electric line or electrical plant, which has been installed or is being installed or is to be installed by a licensee, as to:
  - (a) obstruct or interfere with the installation, maintenance or working of the line of plant; or
  - (b) constitute an unacceptable source of danger to public.

The item 6 of Schedule I of the Electricity Act specifies the procedure to be adopted by the licensees in ensuring that such a tree is felled or lopped or its roots are cut back.

- 1.5 As per Section 2A(1)(b) of the Electricity Act, the Commission is authorized to delegate any power conferred on it by items 3, 4, 5 and 6 of Schedule I of the Electricity Act to any Divisional Secretary and as such it has delegated the powers conferred on it under items 4 and 6 of that Schedule to the Divisional Secretaries.
- 1.6 This document intends to:
  - (a) guide the licensees, who will be the applicants to the Divisional Secretaries requesting authority:
    - (i) to install or keep installed an electric line on, under or over any land;
    - (ii) to fell or lop a tree or cut back its roots that obstruct or interfere with the installation, maintenance or working of an electric line or plant, or constitute an unacceptable cause of danger;

- (b) guide the Divisional Secretaries, who are empowered under the Electricity Act to:
  - (i) authorize the licensees or prohibit the licensees from carrying on activities specified under (a)(i) above;
  - (ii) make recommendations on acquisition of wayleave to the Commission;
- (c) guide the Divisional Secretaries, who are delegated powers by the Commission conferred on it by items 4 of Schedule I of the Electricity Act:
  - (i) to determine the amount of compensation that a landowner may recover from the licensee in respect of grant of wayleave
  - (ii) to determine the amount of compensation that a person may recover from the licensee for any disturbance caused to his or her enjoyment of any land or movables in consequence of the exercise of any right conferred by a wayleave
  - (iii) to conduct inquiries, on its own motion or on the application of a person affected, to determine whether a licensee is liable to pay any person any compensation under (i) and (ii) above;
- (d) guide the Divisional Secretaries, who are delegated powers by the Commission conferred on it by item 6 of Schedule I of the Electricity Act to make orders allowing the licensee to cause a tree to be felled or lopped or its roots to be cut back and to determine any question as to what expenses (if any) are to be paid to the licensee by the owner or occupier of the land (on which such tree is growing), after giving the parties an opportunity of being heard; and
- (e) provide information to the owners and occupiers of lands and the general public on granting or not granting of wayleave (including related procedures) and felling or lopping of trees by licensees.

## Part 2 – Guidelines on wayleave

There are two (2) possible scenarios under which a requirement might arise for a licensee to secure the grant of a wayleave:

- (a) for the installation of a new electric line; or
- (b) when there is a request by a landowner or occupier to remove an existing electric line

#### 2.1 Installation of a new electric line

- (a) The licensee shall give the occupier a minimum of twenty one (21) days' notice (as per specimen format given in appendix I) requiring him or her to give the necessary wayleave
- (b) Where the occupier is not also the owner of the land, a copy of any notice under paragraph (a) above shall also be served on the landowner. The licensee shall ensure that the notice is acknowledged by the occupier (and if the occupier is not also the owner of the land, by the landowner).
- (c) Upon giving a notice under paragraph (a), the licensee shall make take all reasonable efforts to secure the grant of wayleave. If the owner or occupier of the land agrees to grant the wayleave, subject to terms and conditions acceptable to the licensee, the parties shall enter into an agreement (appendix II). In any case, it is reasonable for the licensee at least to obtain the response of the owner or occupier on the notice issued.
- (d) In the event that all reasonable efforts made to secure the grant of wayleave have been unsuccessful, the licensee shall make an application (appendix III) to the respective Divisional Secretary requiring authority to install the electric line. The licensee shall specify the efforts it has made to secure the grant of wayleave, in its application.
- (e) Within six (6) weeks of the application, upon holding an inquiry after giving an opportunity to the owner or occupier of the land concerned, the Divisional Secretary:
  - a. may authorize the licensee, either unconditionally or subject to terms, conditions and stipulations as he or she considers appropriate, to install the electric line:
  - b. may prohibit the licensee from installing the electric line; or
  - c. upon being satisfied that the acquisition of the wayleave has become necessary for the purpose of carrying on the activities authorized by the license of the licensee, shall make his or her recommendation (in the format specified in appendix IV) pertaining to the same, to the Commission.
- (f) However, the Divisional Secretary shall not recommend the acquisition of a wayleave, where the line is to be installed on or over a land that is covered by an authorized dwelling, or planning permission has been granted under the relevant laws for construction of a dwelling.

- (g) Upon receipt of a recommendation from a Divisional Secretary and upon being satisfied that it is necessary or expedient to install the electric line on, under or over the land concerned in order to carry on the activities which the licensee is authorized to carry on under the license, the Commission shall recommend to the Minister the acquisition of the wayleave. Thereupon the Minister shall approve the acquisition by Order published in the Gazette and the wayleave shall thereupon be deemed to be required for a public purpose and be acquired under the Land Acquisition Act and transferred to the licensee. Any amount payable for such acquisition shall be paid for by the licensee.
- 2.2 When there is a request by a landowner or occupier to remove an existing electric line
  - (a) The owner or occupier of the land may give a notice to the licensee requiring to remove the electric line from the land, where a wayleave (whether granted under item 3 of Schedule I of the Electricity Act or by agreement between the parties):
    - (i) is determined by the expiration of the period specified in the wayleave;
    - (ii) is terminated in accordance with a term contained in the wayleave; or
    - (iii) ceases to be binding on the owner or occupier of the land by reason of a change in the ownership or occupation of the land after giving the wayleave
  - (b) On receipt of such notice, all efforts should be made to secure the grant of wayleave, if the licensee requires to keep the line installed.
  - (c) In the event the licensee fails to secure the grant of wayleave, an application (appendix III) shall be made to the respective Divisional Secretary requiring authority to keep installed the electric line. The licensee shall specify the efforts it has made to secure the grant of wayleave, in its application.
  - (d) Within six (6) weeks of the application, upon holding an inquiry after giving an opportunity to the owner or occupier of the land concerned, the Divisional Secretary:
    - (i) may authorize the licensee, either unconditionally or subject to terms, conditions and stipulations as he or she considers appropriate, to keep installed the electric line;
    - (ii) may prohibit the licensee from keeping installed the electric line; or
    - (iii) upon being satisfied that the acquisition of the wayleave has become necessary for the purpose of carrying on the activities authorized by the licensees, shall make his or her recommendations (appendix IV) pertaining to the same, to the Commission.
  - (e) The Commission shall recommend to the Minister the acquisition of the same. Thereupon the Minister shall approve the acquisition by Order published in the Gazette and the wayleave shall thereupon be deemed to be required for a public purpose and be acquired under the Land Acquisition Act and transferred to the licensee. Any amount payable for such acquisition shall be paid for by the licensee.
  - (f) Where within the period of three (3) months beginning from the date of the notice under paragraph (a), the licensee:
    - (i) fails to make an application under paragraph (c);
    - (ii) makes an application under paragraph (c) and that application is refused by the Divisional Secretary; or

(iii) fails to obtain an order authorizing the compulsory purchase of the land under item 7 of Schedule I of the Electricity Act,

the licensee shall comply with the notice at the end of that period, or in the case of subparagraph (ii) above at the end of the period of one (1) month beginning from the date of the Divisional Secretary's decision or such longer period as the Divisional Secretary may specify.

#### 2.3 Compensation with respect to grant of a wayleave

- (a) Where a wayleave is granted to a licensee under item 3 of Schedule I of the Electricity Act (by way of authority granted by the Divisional Secretary or acquisition under the Land Acquisition Act), the owner of the land may recover from the licensee reasonable compensation in respect of the grant as may be determined by the Divisional Secretary. Hence, the Divisional Secretary shall give due consideration for the amount of compensation claimed by the owner of the land (as part of the terms and conditions subject to which he or she is prepared to grant the wayleave) at any inquiry being held in response to an application made by a licensee requesting authority (under 2.1(e) and 2.2(d) above).
- (b) If any damage is caused to land or to movables in the exercise of any right conferred by a wayleave, any person interested in such land or movables may recover reasonable compensation in respect of that damage from the licensee.
- (c) If a person is disturbed in his or her enjoyment of any land or movables in consequence of the exercise of a right conferred by a wayleave, he or she may recover compensation in respect of that disturbance, of such amount as may be determined by the Divisional Secretary, from the licensee.
- (d) The Divisional Secretary may on its own motion or on the application of a person affected, conduct such inquiries as may be necessary to determine whether a licensee is liable to pay any person any compensation under paragraphs (a), (b) and (c) above.
- (e) Upon deciding whether any compensation is payable and, if so, the amount of compensation payable by the licensee, at the conclusion of any inquiry conducted under paragraph (d) above, the Divisional Secretary will communicate such decision in writing to the licensee and to any person who has applied for, or was awarded, compensation. The Divisional Secretary in that communication will clearly indicate the basis for his or her decision on compensation.
- (f) If a person is aggrieved by the decision of the Divisional Secretary that no compensation is payable or is dissatisfied with the amount of compensation determined by the Divisional Secretary, he or she may institute an action against the licensee (in a court of competent jurisdiction) for the recovery of the compensation claimed or the difference between the amount of the compensation claimed by that person or the difference between the amount of the compensation claimed and the amount of compensation determined by the Divisional Secretary. (Please refer paragraphs 5, 6 and 7 of item 4 of Schedule I of the Electricity Act, for further details in this regard.)

## Part 3 – Guidelines on felling or lopping trees

(In this section: 'tree' includes any shrub, and references to 'felling' and 'lopping' shall be construed accordingly; 'land' means the land on which the tree is growing)

- 3.1 When a tree is or will be in close proximity to an electric line or electrical plant which has been installed or is being or to be installed as to obstruct or interfere with the installation, maintenance or working of an electric line/plant or is a source of danger to public, a notice (appendix V) is required to be issued by the licensee to the occupier of the land requiring him/her to fell or lop the tree or cut back its roots.
- 3.2 Where the occupier is not also the owner of the land, a copy of any notice under 3.1 above shall also be served on the landowner. The licensee shall ensure that the notice is acknowledged by the occupier (and if the occupier is not also the owner of the land, by the landowner).
- 3.3 If within seven (7) working days of the notice:
  - (a) the requirements of the notice are complied with by the owner or occupier, licensee shall pay the reasonable expenses incurred by the owner or occupier
  - (b) the requirements of the notice are not complied with and neither the owner nor occupier of the land gives a counter-notice, the licensee shall cause the tree to be felled or lopped or its roots to be cut back so as to prevent it from having the effect mentioned in 3.1 above
  - (c) the requirements of the notice are not complied with and the owner or occupier of the land gives a counter-notice, the matter shall be referred (appendix VI) to the respective Divisional Secretary.
- 3.4 On a reference to him/her under paragraph 3.3(c) above the Divisional Secretary, after giving the parties an opportunity of being heard, may make such order as he/she thinks just, in the circumstances and any such order
  - (a) allowing the licensee to cause the tree to be felled or lopped or its roots to be cut back, after notifying any person by whom a counter notice was given; and
  - (b) determining any question as to what expenses (if any) are to be paid to the licensee by the owner or occupier of the land
- 3.5 Where the licensee acts in pursuance of paragraph 3.3(b) or an order made under subsection 3.4, the licensee shall:
  - (a) cause the tree to be felled or lopped or their roots to be cut back in accordance with good arboricultural practices and so as to do as little damages as possible to trees, fences, hedges and growing crops;
  - (b) cause the felled trees, lopped boughs or root cuttings to be removed in accordance with the directions of the owner or occupier; and
  - (c) make good any damage caused to the land

## Part 4 – Entering into land or premises

- 4.1 Any authorized officer of a licensee may enter any land or premises for the purpose of:
  - (a) placing a new electric line or new electrical plant in place of, or in addition to, any existing line or plant which has already been lawfully placed; or
  - (b) repairing or altering any such existing electric line or electric plant
- 4.2 However, any authorized officer of a licensee shall not demand to enter any land or premises, for the purposes specified in paragraph 4.1, unless:
  - (a) three (3) days' notice (appendix VII) of the intended entry has been given stating as fully and accurately as possible the nature and extent of the acts intended to be done:
  - (b) if required to do so, he or she has produced evidence of his or her authority;
  - (c) reasonable compensation is paid to the owner of the land or premises for any disturbance, disability or damage that may be caused pursuant to the entry.
- 4.3 Any notice referred to in subparagraph 4.2(a) shall:
  - (a) where the land is occupied, be given to the occupier;
  - (b) where the land is not occupied, be given to the owner if his or her name and address are known or can with reasonable diligence be ascertained;
  - (c) where the land is not occupied and the name and address of the owner cannot with reasonable diligence be ascertained, be exhibited in some conspicuous position in the land; and
  - (d) where the land is used or reserved for any public purpose, be given to the officer or other person in charge of the execution of that purpose.
- 4.4 Any person authorized by the licensee, shall be entitled to enter the land, for the purpose of giving a notice referred to in subparagraph 4.2(a)
- 4.5 No person shall enter into any land or premises, for the purposes specified in paragraph 4.1, unless he or she is authorized in writing by a licensee.
- 4.6 Where any person exercises any right to enter into any land or premises, the licensee, by whom he or she was authorized in writing, shall make good any damage done to the land as a result of such entry.
- 4.7 Where in the exercise of a right to enter into any land or premises, any damage is caused to any land or to any movable property, any person interested in the land or movable property may recover compensation in respect of that damage from the licensee on whose behalf the right is exercised.
- 4.8 Where in consequence of the exercise of such a right, a person is disturbed in his or her enjoyment of any land or movable property, he or she may recover from that licensee reasonable compensation in respect of that disturbance as determined by the Commission.

- 4.9 If, in an attempt to exercise any right of entry, a licensee has made all reasonable efforts, otherwise than by the use of force, to obtain entry to the premises; and those efforts have been unsuccessful, it may apply, *ex parte*, to the Magistrate Court having jurisdiction over the place where the premises is situated for an order authorizing an officer authorized by the licensee to enter the premises by force (please refer item 9 of Schedule II of the Electricity Act for further details of such order).
- 4.10 Where in pursuance of any right or power, entry is made on any premises by an officer authorized by a licensee:
  - (a) the officer shall ensure that the premises is left no less secured by reason of the entry; and
  - (b) the licensee shall make good, or pay compensation for, any damage caused by the officer, or by any person accompanying him or her in entering the premises, or in taking any authorized action.

## Part 5 – Information for the general public

#### 5.1 Wayleave

- (a) As per the Electricity Act, the licensees are granted powers to install any electric line or electrical plant under, over, in, on, along or across any street with the consent of the local authority or other relevant authority. Hence, the licensees are not required to obtain wayleave from any landowner in such instances.
- (b) But, the licensees require wayleave to install or keep install an electric line on, over or under a land. The licensees can obtain wayleave:
  - (i) by agreement between the parties (i.e. licensee and owner or occupier of the land)
  - (ii) by way of an authority granted by the Divisional Secretary; or
  - (iii) by way of an acquisition of the wayleave
- (c) Initially, the licensee will issue a notice to the owner or occupier of the land requiring the wayleave. It will make all reasonable efforts to secure the grant of wayleave (by agreement between parties) prior to making an application to the Divisional Secretary requiring authority to install the electric line.
- (d) Upon receipt of a notice requiring wayleave to install a new electric line, from a licensee, an owner or occupier of the land may:
  - (i) grant wayleave without any terms & conditions licensee will install the line
  - (ii) remain silent licensee may consider that the owner of the land is not willing to grant wayleave and hence, may apply for authority to install the electric line from the Divisional Secretary
  - (iii) grant wayleave subject to terms & conditions licensee may either accept the grant subject to landowner's terms & conditions, or apply for authority to install the electric line from the Divisional Secretary subject to the terms & conditions acceptable to
  - (iv) if he or she is not willing to grant the wayleave, inform the same to licensee in writing - licensee may consider alternatives (if any) or apply for authority to install the electric line from the Divisional Secretary
- (e) However, it is advisable for the owners and occupiers of lands to be proactive and duly respond to any such notices or communications (verbal or written) received from licensees, requesting wayleave. Owners and occupiers of lands are advised to propose terms & conditions (subject to which he or she may be willing to grant wayleave) including the compensation in respect of the grant of the wayleave. Such terms & conditions may be accepted by the licensees or may be considered by the Divisional Secretaries at any relevant inquiries. Please refer paragraph 2.3 above for particulars relating to granting of compensation with respect to wayleave.
- (f) When an owner or occupier of a land requires to get an electric line which is already installed on, under or over a land removed, he or she may issue a notice to the licensee requiring the removal of such line please refer item 2.2 (a) for details. Upon receipt of such notice the licensee, upon making all reasonable efforts to secure the grant of wayleave (by agreement between parties), may apply for authority to keep installed the electric line from the Divisional Secretary.

(g) It is in the best interest of an owner or occupier of any land to participate at any inquiry conducted by a Divisional Secretary, at which he or she will be given an opportunity of being heard. Also the provision of all relevant information at any such hearing would assist the Divisional Secretary in making an informed decision which is fair by all the parties.

#### 5.2 Felling or lopping of trees

- (a) If any tree is or will be in close proximity to an electric line or electrical plant which has been installed or is being or to be installed as to obstruct or interfere with the installation, maintenance or working of an electric line/plant or is a source of danger to public, such tree has to be felled or lopped or its roots be cut back so as to prevent it from having such effect.
- (b) As per the Electricity Act, the licensees is required to give a notice to occupier of the land on which the tree is growing, requiring him or her to fell or lop or cut back roots of a tree, referred to in (a) above.
- (c) If the occupier of the land fails to comply with the requirements of a notice (issued by the licensee to fell or lop the tree or cut back roots of a tree) and has not given a counter-notice, within seven (7) working days of the notice, the licensee is empowered to fell or lop or cut back roots of such tree.
- (d) Therefore, if an occupier of a land has any objection for felling or lopping or cutting back roots of a tree (as required by the licensee), he or she shall give a counter-notice to the licensee within seven (7) working days of a notice by the licensee to that effect. Upon receipt of a counter-notice, the licensee may refer the matter to the Divisional Secretary who will give an opportunity of being heard to the parties before making an order.
- (e) If the occupier of the land complies with the requirements of the notice, the licensee will pay to him or her any expenses reasonably incurred in complying with the requirements of the notice. However, no compensation is payable by the licensee for the economic losses incurred by the owner or occupier of the land as a result of felling or lopping or cutting back roots of a tree.
- (f) The Divisional Secretary upon conducting an inquiry may make such order as he or she thinks just in the circumstances allowing the licensee to cause the tree to be felled or lopped or its roots to be cut back to prevent it from having any effect referred to in (a) above.
- (g) If a licensee is empowered to fell or lop the tree or cut back roots of a tree, under (c) or (f) above, it shall comply with the requirement specified under paragraph 3.5 above.

### Part 6 – General

#### 6.1 For the licensees

- (a) The licensees shall keep a copy of these guidelines in all three languages (Sinhala, Tamil and English) at its area offices, branches and consumer service centers (as applicable) for reference by general public during normal working hours.
- (b) The notices referred to in paragraphs 2.1(a) and 3.1 above would not be considered as delivered/received, unless acknowledged by the intended recipient. The periods specified in such notices would be counted with effect from the date of acknowledging the receipt of the same.
- (c) It is advisable to deploy the staff with best inter-personal and communication skills in attempting to secure the grant of wayleave from the owner or occupier of any land. It has been noted that, in many instances, the wayleave could have been obtained from the owners or occupiers of land itself, by using appropriate communication skills and by providing information to avoid any misunderstandings.
- (d) The installation of electric lines and electric plants shall be planned in a manner in which the economic usage of land is optimized and the disturbance to the general public is minimized. Any planned expansions in the distribution and transmission networks shall also be considered in determining the path of an electric line.

#### 6.2 For the Divisional Secretaries

Adhering to the general guidelines specified below would ensure the legitimacy and dependability of the decisions made by the Divisional Secretaries with respect to the Parts 2 and 3 above:

- (a) It shall be ensured that all inquiries, hearings, meetings, etc. held and decisions made by the Divisional Secretaries are arrived at by following a due process and based on the principles of natural justice.
- (b) All the relevant parties, specially the relevant owner or occupier of the land, shall be duly informed of any inquiry, hearing or meeting to be conducted. It is advisable to obtain an acknowledgment of receipt of any notice of such inspection, hearing or meeting.
- (c) All the relevant parties, specially the relevant owner or occupier of the land, shall be given an opportunity to express his or her views at such inspection, hearing or meeting.
- (d) If it is revealed that the owner or occupier of the land has not received the notice or has not been present due to unavoidable circumstances, it is prudent to reconduct any planned inspection, hearing or meeting with the participation of the owner or occupier of the land.

- (e) The minutes/records of all inquiries, hearings, meetings, etc. held under the paragraphs 2.1(e), 2.2(d), 2.3(d) and 3.4 shall be maintained and submitted to the Commission when requested to do so.
- (f) All efforts shall be made to optimize the usage of land which is a limited natural resource.
- (g) Even if the inquiries, hearings, meetings, etc. were conducted by an officer other than the Divisional Secretary, the final decision on the matter shall be taken by the Divisional Secretary him/herself.
- (h) Any decision made by a Divisional Secretary, including the basis on which it has been made, shall be duly informed to all parties concerned

## Appendix I – NOTICE REQUIRING WAYLEAVE (NOTICE – 'W')

To:
In terms of Item 3 of Schedule I of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended), a notice is hereby given requiring the grant of wayleave <sup>1</sup> at the land located at:
(address of the land)
A description of the required wayleave is given below:
If you are willing to grant the required wayleave, please communicate it to the undersigned within twenty one (21) days from the date of this notice, in the form attached herewith. However, if no response is received by us within the said period, it would be considered that you are not willing to grant the wayleave.
Signature of authorized officer of the licensee
Name of authorized officer:  Contact number:  Address:
Date: dd/mm/yyyy (date of notice)

<sup>&</sup>lt;sup>1</sup> 'wayleave' means such interest in the land as consists of a right of licensee, to install and keep installed, an electric line on, under, or over, that land and to have access to that land for the purpose of inspecting, maintaining, adjusting, repairing, altering, removing or replacing such electric line.

### **GRANT OF WAYLEAVE**

To:	(licensee)
I	
(full nai	me) being the owner / occupier* of the land located at
	grant the wayleave requested by the notice dated
The way	yleave is granted subject to the terms & conditions given below:
•••••	
•••••	
•••••	
•••••	
•••••	
	Signature
NIC Nu	mber:
Date:	
(*please	strike off the inappropriate words)

## Appendix II – WAYLEAVE AGREEMENT

Parties:		
, ,		("Owner / Occupier*")
Tiddless.		
Terms and co	nditions of the <b>owner / occupier*</b>	of the land:
Terms and co	nditions of the Licensee:	
We, the <b>own</b> conditions.	er / occupier* of the land and	the Licensee, agree to the above terms and
Owner / 0	Occupier* of the land	Licensee
Date:		Date:
(*please strike	off the inappropriate words)	

17/27

## Appendix III – APPLICATION REQUIRING AUTHORITY TO INSTALL/KEEP INSTALLED AN ELECTRIC LINE

To	(The Divisional Secretary of the administrative district in which the land in which the wayleave is required)
1.	Purpose of the application is to require authority to: (please mark '✓' where appropriate)
	1.1 Install an electric line
	In terms of paragraph (1) of item 3 of Schedule I of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended), <b>a notice / notices* was / were*</b> issued to the <b>landowner / landowners*</b> , requesting wayleave for the purpose of installing an electric line (details are given under item 2 below). However, the said <b>landowner has / landowners have*</b> : (mark ' $\checkmark$ ' where appropriate)
	failed to give the wayleave before the end of the period specified in the notice
	given the wayleave subject to terms and conditions which are not acceptable to us
	1.2 Keep installed an electric line
	In terms of paragraph (2) of item 5 of Schedule I of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended), the owner or occupier of the land has given notice to remove an electric line (details are given under item 2 below) from the land.
2.	Details of the electric line:
3.	A copy/copies* of notice/notices* issued by us/received by us*, containing the details of landowner/landowners or occupier/occupiers* are attached herewith. All efforts were made to secure the grant of wayleave subject to terms and conditions acceptable to us, but such efforts have been unsuccessful (evidences relating to efforts made to secure the grant of wayleave are attached herewith).
4.	We hereby request the authority to <b>install / keep installed*</b> the electric line(s) in accordance with item 3 of Schedule I of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended).
 Sig	nature of authorized officer of the licensee
Co	me of authorized officer: ntact number: dress:
Da	te: (date of application)
(*p	lease strike off the inappropriate words)

## Appendix IV – RECOMMENDATION TO ACQUIRE WAYLEAVE

Date:
To: Chairman, Public Utilities Commission of Sri Lanka
We refer to the application made by
Given below is a summary of findings of the inquiry held with respect to the above application by the licensee:
Based on the inquiry and above findings, I recommend the acquisition of the wayleave requested by the licensee referred to in the above application.
The required information/documents <sup>2</sup> (as per annexure) are attached herewith.
Signature
Divisional Secretary (administrative district)

<sup>&</sup>lt;sup>2</sup> The completed annexure should be forwarded along with the recommendation. The relevant item numbers (as per annexure) should be indicated on top right hand corner of the documents forwarded. No recommendation will be considered successful/complete unless all the information/documents specified in the annexure are submitted to the commission.

### (Annexure to Appendix IV - list of information/documents to be forwarded)

1.	Application by the licensee to install/keep installed an electric line	
2.	Copy of the notice requiring wayleave	
3.	Proof of acknowledgement of receipt of the notice by landowner	
4.	Terms and conditions not acceptable to the licensee (if any), subject to which the landowner has granted the wayleave	
5.	Copy of the notice received from the owner or occupier of the land requiring the licensee to remove the electricity line	
6.	Confirmation that the land is not covered by an authorized dwelling	
7.	Confirmation that planning permission has not been granted under the relevant laws for construction of a dwelling	
8.	Confirmation that the licensee has made all reasonable efforts to secure the grant of wayleave	
9.	Confirmation that the acquisition of the wayleave is necessary for the carrying on of the activities authorized by the license of the licensee	
10.	Evidence to prove that the landowner was given an opportunity of being heard	
11.	Details of the land and landowner:	
	(a) Full name and copy of NIC of the landowner	
	(b) Proof of legal ownership of the land	
	(c) Assessment number of the land	
	(d) Address of the land	
	(e) GN Division in which the land is located	
	(f) Confirmation that there is no dispute on the ownership of the land and that there is no legal impediment in acquiring the land	
12.	Details of the required wayleave:	
	(a) Map showing the proposed installation, extent of wayleave required, boundaries of the land, existing electric line(s)/plant(s) installed over, under or on the land, and buildings/structures constructed or being constructed on the land	
	(b) System map of the area showing the proposed electricity line and other existing electric lines installed around the locality	
	(c) Brief description of the work to be carried out on the land	

## Appendix V – NOTICE REQUIRING TO FELL OR LOP A TREE

(**NOTICE - 'T')** 

To:
In terms of Item 6 of Schedule I of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended), a notice is hereby given requiring to fell or to lop tree(s) or to cut back its roots at the land located at:
(address of the land)
The tree(s) (described below) growing on the above land has to be felled, lopped or its roots need to be cut back as it <b>is / will be*</b> in such close proximity to an <b>electric line / electrical plant / both*</b> which <b>has been installed / is being installed / is to be installed*</b> by us, as to:
(*strike off the inappropriate words)
obstruct or interfere with the installation, maintenance or working of the line or plant
constitute an unacceptable source of danger to public
(mark '✓' where appropriate)
A description of the tree(s) to be felled or lopped or roots to be cut back is given below:
Any expenses reasonably incurred by you in complying with the requirements of this notice would be paid by us. If you have any objections on the requirements contained in this notice, please communicate it to the undersigned within seven (7) working days from the date of this notice. However, if no response is received by us within the said period, we are authorized to cause the tree(s) described above to be felled or lopped or its roots to be cut back so as to prevent it from having the effect mentioned above.
Signature of authorized officer of the licensee
Name of authorized officer:  Contact number:  Address:
Date: dd/mm/yyyy (date of notice)

# Appendix VI – REFERRAL OF A MATTER RELATING TO FELLING OR LOPPING A TREE(S) TO A DIVISIONAL SECRETARY

(The Divisional Secretary of the administrative district in which the land on which the tree is growing)
In terms of Item 6 of Schedule I of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended), a notice(s) was issued to the following landowner(s)/occupier(s) requesting to fell or to lop tree(s) or to cut back its roots at the land located at:
Name(s) and address(es) of the owner(s)/occupier(s) of the land(s):
(1)
(2)
(3)
(4)
The counter notice(s) issued, objecting the requirements of the notice(s) issued by us, by the owner(s)/occupier(s) is attached herewith.
We hereby request the authority to fell or to lop tree(s) or to cut back its roots in accordance with the item 6 of Schedule I of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended).
Signature of authorized officer of the licensee
Name of authorized officer:  Contact number:  Address:

Date: dd/mm/yyyy (date of application)

## Appendix VII – NOTICE OF INTENDED ENTRY TO A LAND OR PREMISES

(**NOTICE** – **'E'**)

To: (name of the occupier)
In terms of Item 8 of Schedule II of the Sri Lanka Electricity Act, No. 20 of 2009 (as amended), a notice is hereby given on the intended entry by our authorized persons to the land/premises located at:
(address of the land/premises)
Intended date of entry: dd/mm/yyyy
Intended time of entry:: a.m./p.m.
Nature and extent of the acts intended to be done:
(state as fully as accurately as possible the nature and extent of the acts intended to be done)
Duration of stay:  (insert intended time taken)  No. of persons:
If any clarifications are required on the above or there is any inconvenience relating to the date and/or time proposed, please contact the undersigned.
Signature of authorized officer of the licensee
Name of authorized officer:  Contact number:  Address:
Date: dd/mm/yyyy

#### Annex 9: Minimum clearance from trees to Overhead lines

#### a) Low Voltage Overhead Lines

	Not surrounded by insulation	Surrounded by insulation
Vertical distance	2.7 m	0.15 m
Horizontal distance	1.5 m	0.15 m

#### b) Medium Voltage Overhead Lines

Vertical distance	3.7 m
Horizontal distance	2.9 m

The distances identified above should be further increased considering the factors such as Tree movement, Tree re-growth, Overhanging of, branches, Conductor swing and Falling of a tree/part of a tree, etc.; for different geo-physical conditions.

#### c) High Voltage

#### (i). 132 kV

Within an area of 13.5 m from center line on both sides of the Overhead Line, trees shall not be grown, unless the Licensee determines that it wouldn't compromise safety. In case the Licensee allows trees to be grown, following minimum distances shall be maintained up to swing of 45<sup>0</sup>

- 1.4 m from the Overhead Line if tree cannot support a ladder/climber, and
- 3.6 m from the Overhead Line if tree is capable of supporting a ladder/climber

Outside the area of 13.5 m from center line on both sides of the Overhead Line, Height of the tree should be at least 5 m less than the distance to the tree from the center line.

#### (ii).220 kV

Within the area of 17.5 m from center line on both sides of the Overhead Line, Trees shall not be grown, unless the Licensee determines that it wouldn't compromise safety. In case the Licensee allows trees to be grown, following minimum distances shall be maintained up to swing of 45°

- 2.4 m from the Overhead Line if the tree cannot support a ladder/climber, and
- 4.6 m from the Overhead Line if the tree is capable of supporting a ladder/climber

Outside the area of 17.5 m from center line of the Overhead Line, height of the tree should be at least 5 m less than the distance to tree from the center line.

Supply Services Code Annex 9-i

#### Annex 10: Minimum clearance from buildings to Overhead lines

Minimum distances from any building or structure to any position to which a conductor in an Overhead Line may swing under the influence of wind shall be as specified below:

Nominal Voltages	Vertical	Horizontal
	Distance	Distance
Not exceeding 1000Volts	2.40 m	1.50 m
Exceeding 1000 Volts but not exceeding 11,000	2.70 m	1.50 m
Volts		
Exceeding 11,000 Volts but not exceeding	3.00 m	2.00 m
33,000 Volts		
Exceeding 33,000 Volts but not exceeding	4.10 m	4.10 m
132,000 Volts		
Exceeding 132,000 Volts but not exceeding	5.18 m	5.18 m
220,000 Volts		

Supply Services Code Annex 10-i